

N 0150.3 SERIES PROCESS VACUUM PUMPS




N 0150.3 AP.9 E

ADVANTAGES

POSSIBLE AREAS OF USE

Please visit our website
www.knf.com
to get more information



PERFORMANCE DATA

Series model	N 0150.3												
Material design	AP.9 E		SP.9 E		SP.13 E		ST.9 E		ST.13 E		SP.12 E		
Pump head	Aluminum		Stainless steel										
Diaphragm	EPDM						PTFE-coated				EPDM		
Valves	Stainless steel												
Flow rate at atm. pressure (l/min)	130.0 ± 10 %						100.0 ± 10 %				130.0 ± 10 %		
Ultimate vacuum (mbar abs.)	25						30				25		
Max. operating pressure (bar rel./psig)	0.5/7.3												
Permissible ambient temperature (°C)	+5 ... +40												
Permissible media temperature (°C)	+5 ... +40												
Weight (kg/lbs)	41.5/ 91.3	46.5/ 102.3	53.5/ 117.7	58.5/ 128.7	53.5/ 117.7	58.5/ 128.7	53.5/ 117.7	58.5/ 128.7	53.5/ 117.7	58.5/ 128.7	58.5/ 128.7	63.5/ 139.7	

ELECTRICAL DATA

[illegible]

ACCESSORIES	
Description	Part No.
Base plate with rubber-bonded metals	304463
Base plate with rubber-bonded metals N 0150.3 SP.12 E	304476
Connection water cooling (only in combination with stainless steel pump heads)	
N 0150.3 S_.9 E S_.13 E	306765
N 0150.3 SP.12 E	306766
Wrench for retainer plate	018816
O-ring for lock screw (.12)	026056

SPARE PARTS	
Description	Part No.
N 0150.3 _P.9 E SP.13 E	
Diaphragm	047013
Reed valve for suction side	043951
Reed valve for pressure side	043949
O-ring D55x3.0 EPDM	047016
O-ring (.13 only) D150x3.0 EPDM	047372
O-ring (.13 only) D34x3.0 EPDM	047373
N 0150.3 ST.9 E ST.13 E	
Diaphragm	116991
Reed valve for suction side	043951
Reed valve for pressure side	043949
O-ring D55x3.0 FPM	002458
O-ring (.13 only) D150x3.0 FPM	002461
O-ring (.13 only) D34x3.0 FPM	045499
N 0150.3 SP.12 E	
Working diaphragm	027252
Safety diaphragm	047379
Reed valve	003475
O-ring D55x3.0 EPDM	047016
O-ring D150x3.0 EPDM	047372
O-ring D34x3.0 EPDM	047373

The performance values for the series models shown on this data sheet were determined under test conditions. The actual performance values may differ and depend in particular on the usage conditions and therefore on the specific application, on the parameters of the components involved in the user's system and on any technical modifications carried out which deviate from the standard configuration or the as delivered condition.

If individual designs have been created for specific customers on the basis of series models, other technical performance data may apply.

Before operation begins, the relevant operating instructions and/or assembly or installation instructions should be read and the safety information contained in these instructions should be noted.

KNF reserves the right to make changes to the product and the associated documentation without prior notice to the customer.



www.knf.com


N 0150.3 AP.9 E | SP.9 E | SP.13 E | ST.9 E | ST.13 E

PERFORMANCE DATA


Series model	Flow rate at atm. pressure (l/min) ¹⁾	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 0150.3 AP.9 E	130.0 ± 10 %	0.5/7.3	25
N 0150.3 SP.9 E	130.0 ± 10 %	0.5/7.3	25
N 0150.3 SP.13 E	130.0 ± 10 %	0.5/7.3	25
N 0150.3 ST.9 E	100.0 ± 10 %	0.5/7.3	30
N 0150.3 ST.13 E	100.0 ± 10 %	0.5/7.3	30

¹⁾ Liter at STP


N 0150.3 __.9 E | S_.13 E

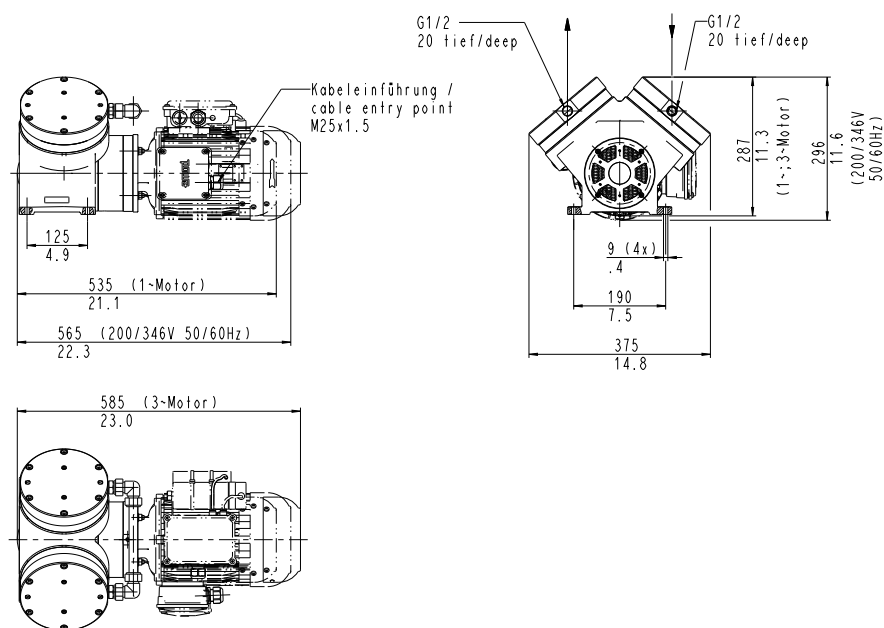


N 0150.3 _P_ E

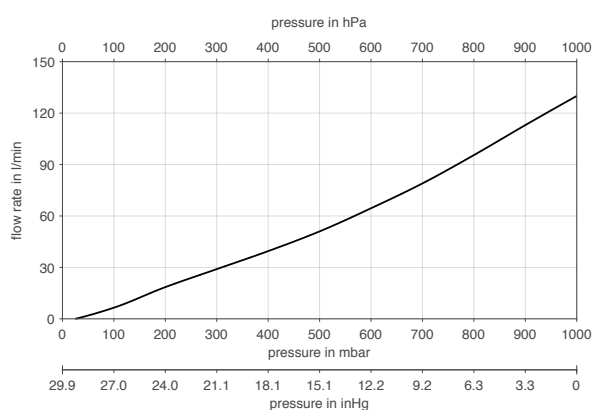


N 0150.3 _T_ E

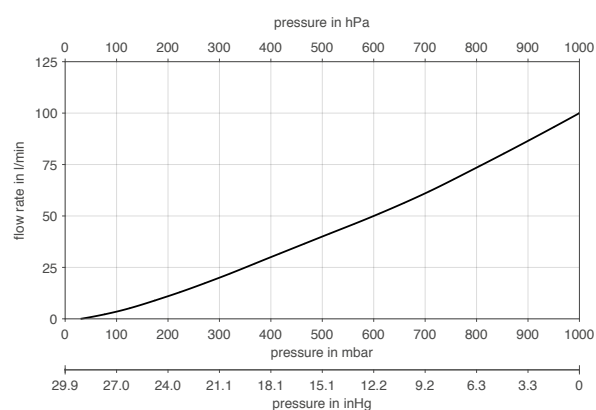

N 0150.3 _P_ E | PUMP DOWN TIME FOR 20 LITER VESSEL

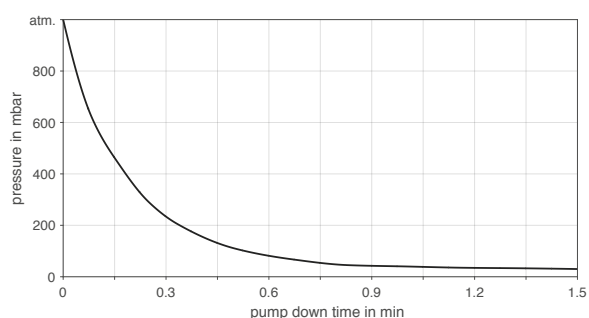

N 0150.3 _T_ E | PUMP DOWN TIME FOR 20 LITER VESSEL

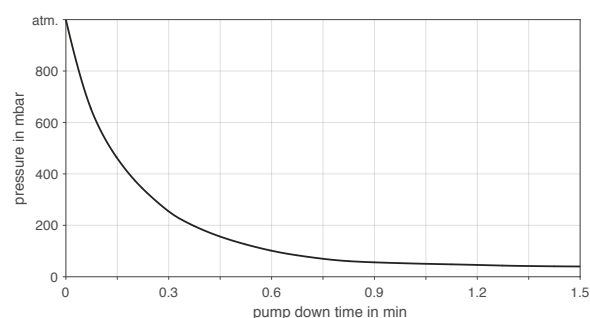


N 0150.3 SP.12 E

PERFORMANCE DATA


Series model	Flow rate at atm. pressure (l/min) ¹⁾	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 0150.3 SP.12 E	130.0 ± 10 %	0.5/7.3	25

¹⁾ Liter at STP

N 0150.3 SP.12 E

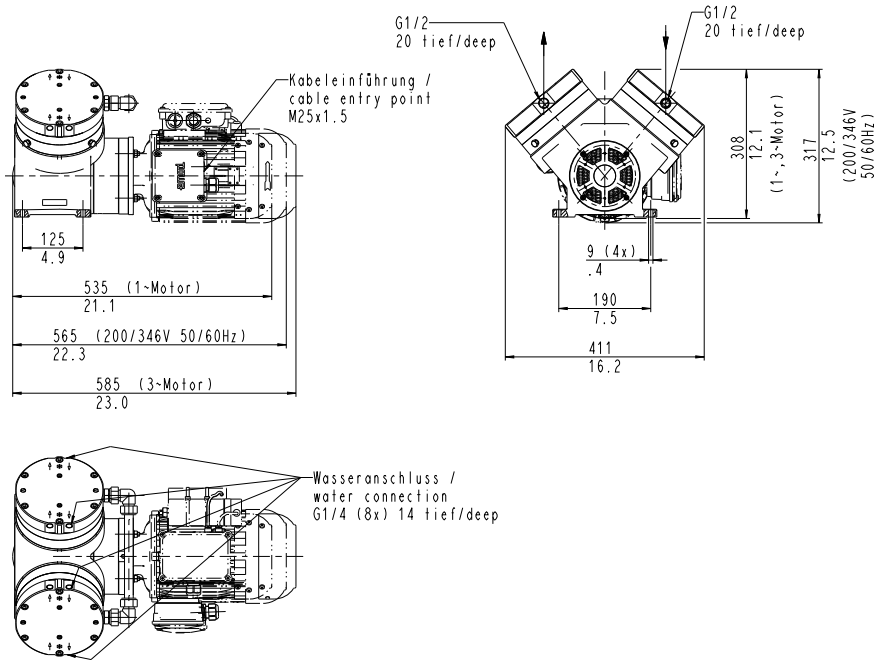

N 0150.3 SP.12 E

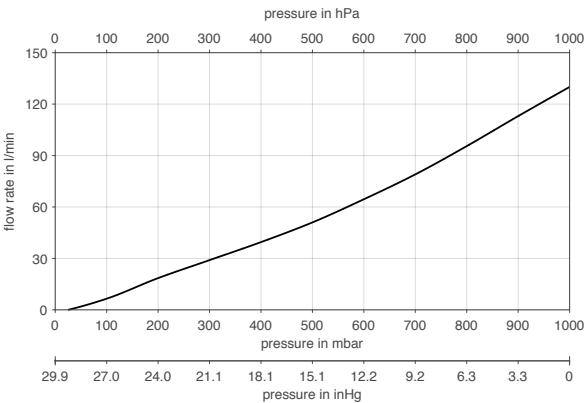

N 0150.3 SP.12 E | PUMP DOWN TIME FOR 20 LITER VESSEL

