


N 035.3 SERIES VACUUM PUMPS



N 035.3 ANE with IP 20 motor

ADVANTAGES

- Versatile in vacuum applications
- Durable even with difficult operating conditions
- High chemical resistance

POSSIBLE AREAS OF USE

- Process industry
- Chemical industry

Please visit our website
www.knf.com
to get more information



PERFORMANCE DATA

Series model	N 035.3					
Material design	ANE	AVE	ATE	SNE	SVE	STE
Pump head	Aluminum					Stainless steel
Diaphragm	CR	FPM	PTFE-coated	CR	FPM	PTFE-coated
Valves	Stainless steel			CR	FPM	PTFE
Flow rate at atm. pressure (l/min)	30.0		27.0	30.0		27.0
Ultimate vacuum (mbar abs.)	13		20	13		20
Permissible ambient temperature (°C)	+5 ... +40					
Permissible media temperature (°C)	+5 ... +40					
Weight (kg/lbs)	10.9/24.0 (IP 20) – 11.2/24.7 (IP 44)			16.5/36.4 (IP 20) – 16.8/37.0 (IP 44)		

ELECTRICAL DATA

Voltage (V)	230
Motor	Capacitor motor
Protection class motor	IP 20 IP 44
Frequency (Hz)	50
Power P ₁ (W)	230 260
I _{max} (A)	1.50 2.00

ACCESSORIES

Description	Part No.	Details
Silencer/Inlet filter	000352	G 1/4
Fine control valve, suction side	000354	with vacuum gauge
Hose connector	000362	G 1/4, for hose ID 9
Hose connector, stainless steel	020234	G 1/4, for hose ID 9

SPARE PARTS

Description	Part No.	Details
N 035.3 ANE		
Diaphragm	001312	
Countersunk screw	110711	
Reed valve	001328	
Gasket	001326	
N 035.3 AVE		
Diaphragm	001405	
Countersunk screw	110711	
Reed valve	001328	
Gasket	011796	
N 035.3 ATE		
Diaphragm	001406	
Countersunk screw	110711	
Reed valve	001328	
Gasket	011796	
N 035.3 SNE		
Diaphragm	001312	
Countersunk screw	110711	
Valve plate	001308	
N 035.3 SVE		
Diaphragm	001405	
Countersunk screw	110711	
Valve plate	001404	
N 035.3 STE		
Diaphragm	001406	
Countersunk screw	110711	
Valve plate	001407	

The performance values for the series models shown on this data sheet were determined under test conditions. The actual performance values may differ and depend in particular on the usage conditions and therefore on the specific application, on the parameters of the components involved in the user's system and on any technical modifications carried out which deviate from the standard configuration or the as-delivered condition.

If individual designs have been created for specific customers on the basis of series models, other technical performance data may apply.

Before operation begins, the relevant operating instructions and/or assembly or installation instructions should be read and the safety information contained in these instructions should be noted.

KNF reserves the right to make changes to the product and the associated documentation without prior notice to the customer.



www.knf.com


N 035.3 ANE | AVE | ATE | SNE | SVE | STE | IP 20 MOTOR

PERFORMANCE DATA


Series model	Flow rate at atm. pressure (l/min) ¹⁾	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 035.3 ANE	30.0	-	13
N 035.3 AVE	30.0	-	13
N 035.3 ATE	27.0	-	20
N 035.3 SNE	30.0	-	13
N 035.3 SVE	30.0	-	13
N 035.3 STE	27.0	-	20

¹⁾ Liter at STP


N 035.3 A_E (WITH IP 20 MOTOR)

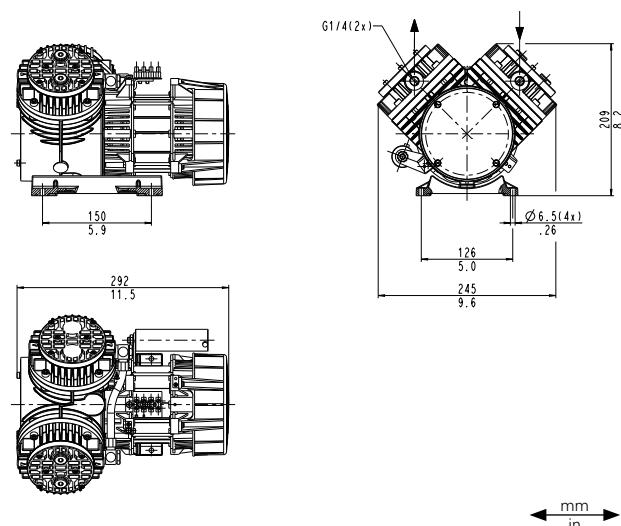


N 035.3 S_E (WITH IP 20 MOTOR)

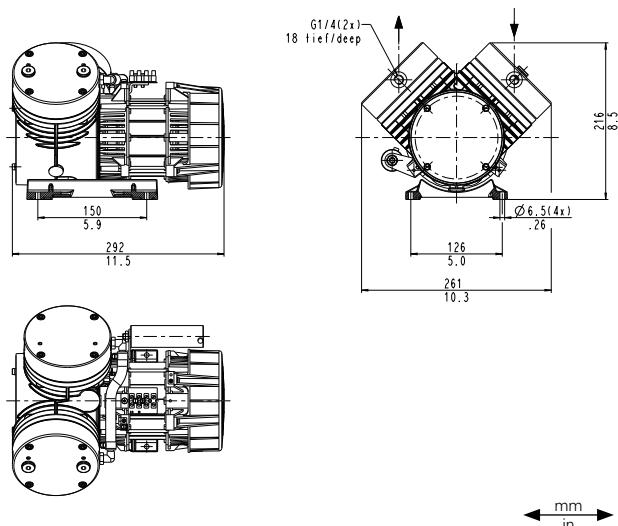

N 035.3 __ E (WITH IP 20 MOTOR)

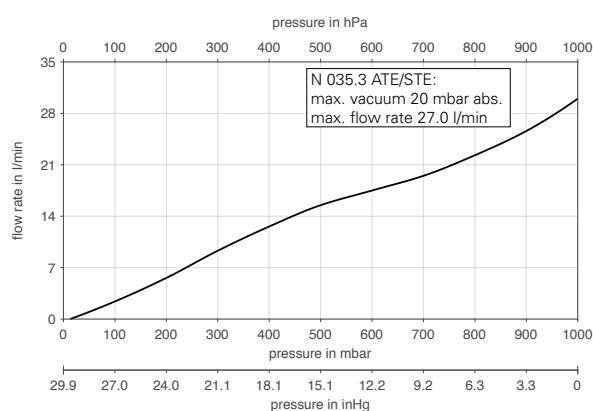

N 035.3 ANE | PUMP DOWN TIME FOR 20 LITER VESSEL

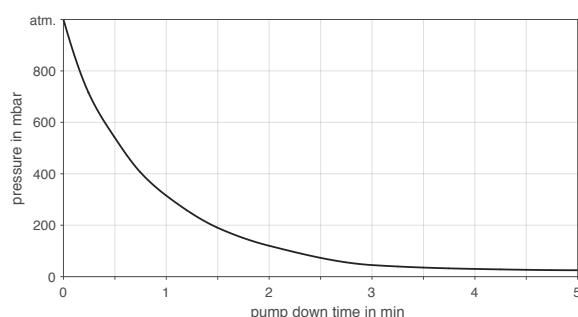


N 035.3 ANE | AVE | ATE | SNE | SVE | STE | IP 44 MOTOR

PERFORMANCE DATA


Series model	Flow rate at atm. pressure (l/min) ¹⁾	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 035.3 ANE	30.0	-	13
N 035.3 AVE	30.0	-	13
N 035.3 ATE	27.0	-	20
N 035.3 SNE	30.0	-	13
N 035.3 SVE	30.0	-	13
N 035.3 STE	27.0	-	20

¹⁾ Liter at STP


N 035.3 A_E (WITH IP 44 MOTOR)

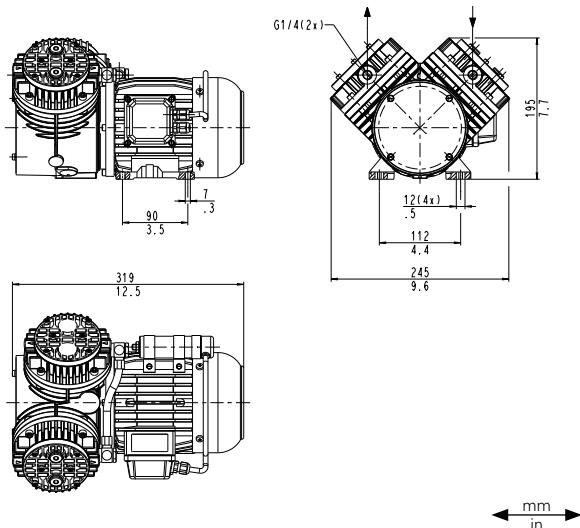

N 035.3 S_E (WITH IP 44 MOTOR)

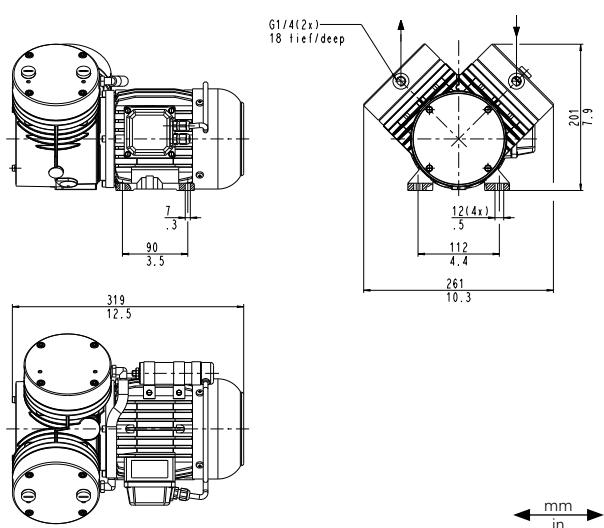

N 035.3_E (WITH IP 44 MOTOR)

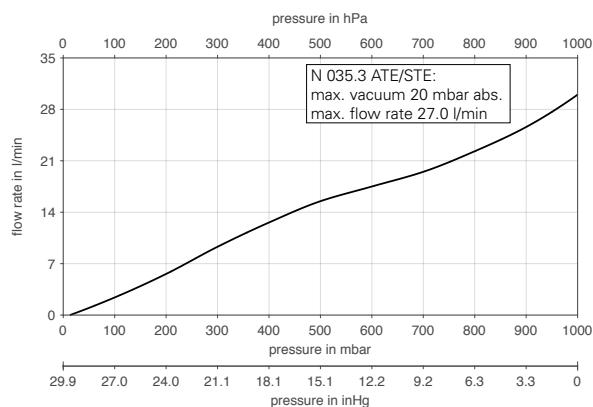

N 035.3 ANE | PUMP DOWN TIME FOR 20 LITER VESSEL

