

N 186.1.2 SERIES

PROCESS VACUUM PUMPS AND COMPRESSORS



N 186.1.2 SP.12 E


ADVANTAGES

- Twofold safety: The combination of a working diaphragm and an additional safety diaphragm prevents gas from escaping in the event of a fracture (.12)
 - The robust design will hold up to challenging operating conditions
 - High pressure up to 7 bar rel./101.5 psig
- High level of gas tightness
Following leakage rates are available:
.9 $\triangle$ to $< 6 \times 10^{-3}$ mbar l/s
SP.13 $\triangle$ $< 6 \times 10^{-6}$ mbar l/s
ST.13 $\triangle$ $< 1 \times 10^{-5}$ mbar l/s
SP.12 $\triangle$ $< 6 \times 10^{-6}$ mbar l/s

POSSIBLE AREAS OF USE

- Energy technology – especially in nuclear facilities
- Chemical industry
- Process industry
- Research and development

Please visit our website
www.knf.com
 to get more information



PERFORMANCE DATA												
Series model	N 186.1.2											
Material design	AP.9 E		SP.9 E		SP.13 E		SP.12 E		ST.9 E		ST.13 E	
Pump head	Aluminum		Stainless steel									
Diaphragm	EPDM								PTFE-coated			
Valves	Stainless steel											
Flow rate at atm. pressure (l/min)	42.0 ± 10 %								35.0 ± 10 %			
Ultimate vacuum (mbar abs.)	120								130			
Max. operating pressure (bar rel./psig)	7.0/101.5						3.0/43.5		7.0/101.5			
Permissible ambient temperature (°C)	+5 ... +40											
Permissible media temperature (°C)	+5 ... +40											
Weight (kg/lbs)	25.0/55.0		29.5/64.9				30.5/67.1		29.5/64.9			
ELECTRICAL DATA												
Voltage (V)	230	230/ 400	230	230/ 400	230	230/ 400	230	230/ 400	230	230/ 400	230	230/ 400
Motor	Capac- itor motor	Three- phase motor	Capac- itor motor	Three- phase motor	Capac- itor motor	Three- phase motor	Capac- itor motor	Three- phase motor	Capac- itor motor	Three- phase motor	Capac- itor motor	Three- phase motor
Protection class motor	IP 55											
Frequency (Hz)	50											
Power P ₁ (W)	550	310	550	310	550	310	610	310	550	310	550	310
I _{max} (A)	4.50	3.30/ 1.90	4.50	3.30/ 1.90	4.50	3.30/ 1.90	5.30	3.30/ 1.90	4.50	3.30/ 1.90	4.50	3.30/ 1.90

ACCESSORIES	
Description	Part No.
Base plate with rubber-bonded metals	310102
Connection water cooling device S_.9 S_.13	303901
Connection water cooling device SP.12	303902
Wrench for retainer plate	018816
O-ring for lock screw	026056
Inlet filter G 1/4	316661

SPARE PARTS	
Description	Part No.
Spare parts kit N 186.1.2 _P.9 E	315460
Spare parts kit N 186.1.2 SP.13 E	315461
Spare parts kit N 186.1.2 ST.9 E	307823
Spare parts kit N 186.1.2 ST.13 E	315463
Spare parts kit N 186.1.2 SP.12 E	315462

The performance values for the series models shown on this data sheet were determined under test conditions. The actual performance values may differ and depend in particular on the usage conditions and therefore on the specific application, on the parameters of the components involved in the user's system and on any technical modifications carried out which deviate from the standard configuration or the as delivered condition.

If individual designs have been created for specific customers on the basis of series models, other technical performance data may apply.

Before operation begins, the relevant operating instructions and/or assembly or installation instructions should be read and the safety information contained in these instructions should be noted.

KNF reserves the right to make changes to the product and the associated documentation without prior notice to the customer.



www.knf.com

N 186.1.2 AP.9 E | SP.9 E | SP.13 E | ST.9 E | ST.13 E


PERFORMANCE DATA

Series model	Flow rate at atm. pressure (l/min)	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 186.1.2 AP.9 E	42.0 ± 10 %	7.0/101.5	120
N 186.1.2 SP.9 E	42.0 ± 10 %	7.0/101.5	120
N 186.1.2 SP.13 E	42.0 ± 10 %	7.0/101.5	120
N 186.1.2 ST.9 E	35.0 ± 10 %	7.0/101.5	130
N 186.1.2 ST.13 E	35.0 ± 10 %	7.0/101.5	130


Flow rate determined at 20 °C, 1013 mbar abs.

(Pressure 0 to 1013 mbar abs. in accordance with ISO 21360-1/2)

N 186.1.2 _9 E | S_13 E

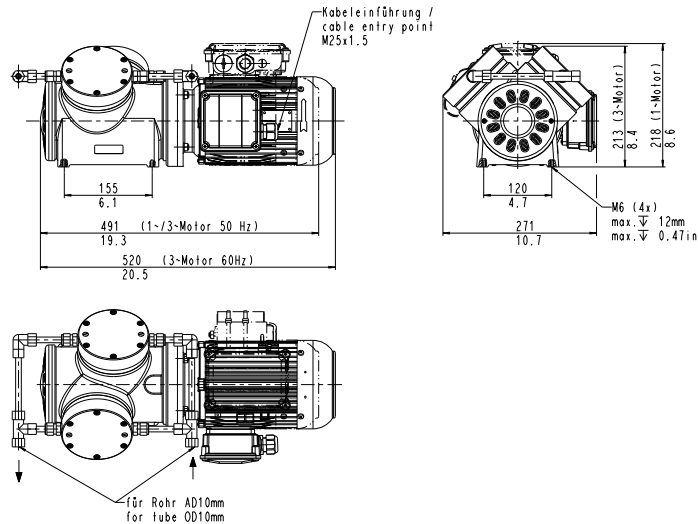


N 186.1.2 _P.9 E | SP.13 E

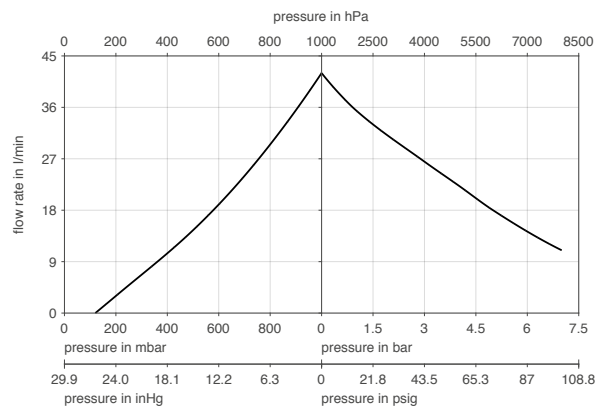

Flow rate determined at 20 °C, 1013 mbar abs.

(Pressure 0 to 1013 mbar abs. in accordance with ISO 21360-1/2)


N 186.1.2 ST.9 E | ST.13 E

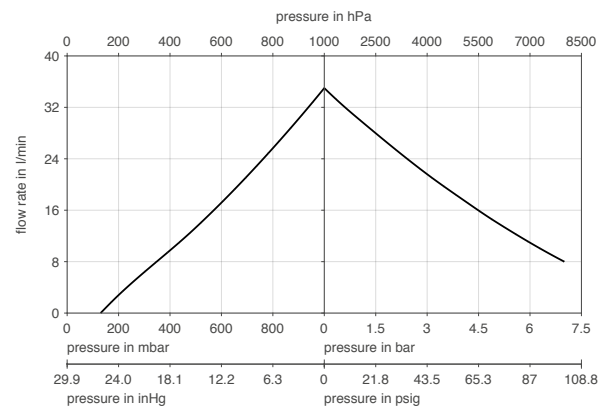


Flow rate determined at 20 °C, 1013 mbar abs.

(Pressure 0 to 1013 mbar abs. in accordance with ISO 21360-1/2)

N 186.1.2 | PUMP UP TIME FOR 20 LITER VESSEL

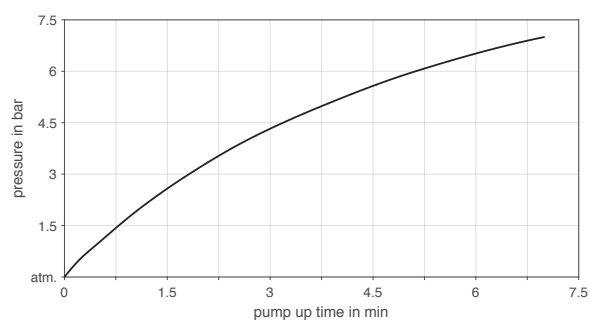

N 186.1.2 | PUMP DOWN TIME FOR 20 LITER VESSEL

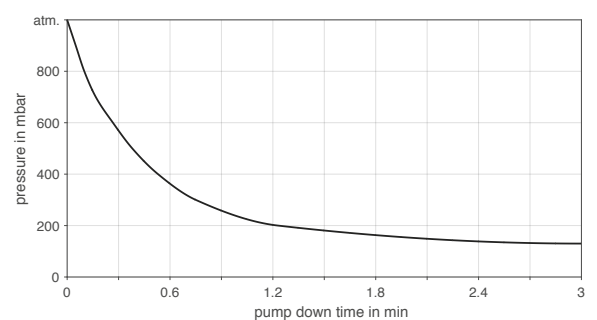


N 186.1.2 SP.12 E

PERFORMANCE DATA


Series model	Flow rate at atm. pressure (l/min)	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 186.1.2 SP.12 E	42.0 ± 10 %	3.0/43.5	120

Flow rate determined at 20 °C, 1013 mbar abs.
(Pressure 0 to 1013 mbar abs. in accordance with ISO 21360-1/2)

N 186.1.2 SP.12 E

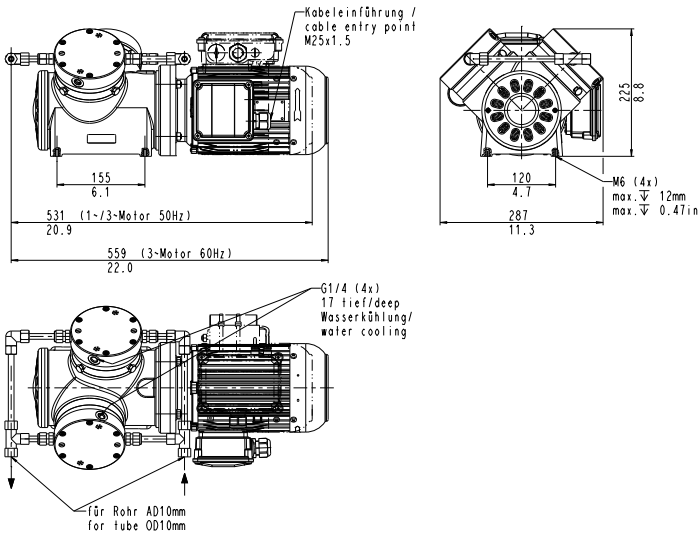


N 186.1.2 SP.12 E

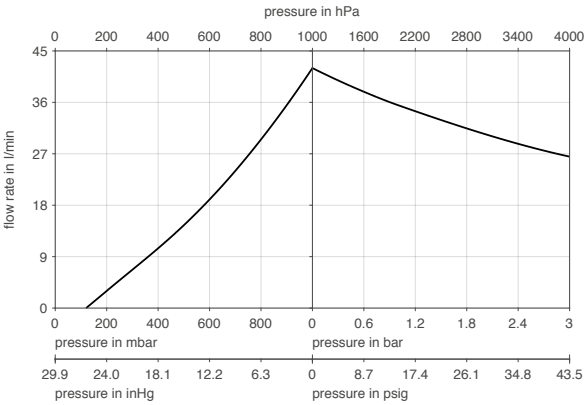

Flow rate determined at 20 °C, 1013 mbar abs.
(Pressure 0 to 1013 mbar abs. in accordance with ISO 21360-1/2)

N 186.1.2 SP.12 E | PUMP UP TIME FOR 20 LITER VESSEL

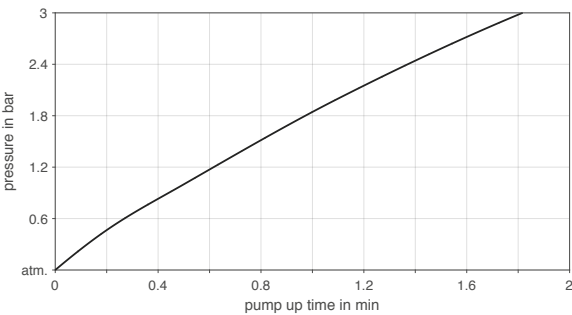

N 186.1.2 SP.12 E | PUMP DOWN TIME FOR 20 LITER VESSEL

