

# NF 1.5

## DIAPHRAGM LIQUID PUMP



NF 1.5 KPDC-M



NF 1.5 KPDCB-4



NF 1.5 KP51DCB-4


### ADVANTAGES

- Small and powerful
- Self-priming and excellent for pressure
- Extreme chemical resistance
- Dry running, durable and maintenance free

### POSSIBLE AREAS OF USE

- Analysers
- Laboratory
- Cleaning industry
- Printing

Please visit our website  
[www.knf.com](http://www.knf.com)  
 to get more information.

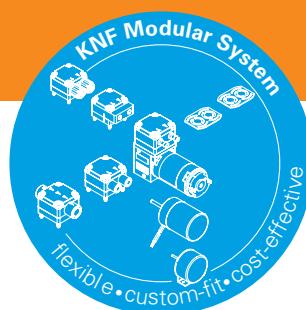

### PERFORMANCE DATA

Basic types	NF 1.5 DC-M		NF 1.5 DCB	NF 1.5 DCB-4
Material options	KP	KT	TT	
Pump head	PP	PP	PVDF	
Diaphragm	PTFE	PTFE	PTFE	
Valves	EPDM	FFKM	FFKM	
Flow rate (ml/min) at atm. pressure	≥60		≥40	≥5 - 40
Suction height (mWg)	3			
Pressure head (mWg)	60			
Permissible ambient temperature (°C)	+5 to +40			
Permissible liquid temperature (°C)	+5 to +80			
Weight (g)	57		50	
IP protection factor	30		40	

### ELECTRICAL DATAS

Operation voltage (V)	12 / 24	12 / 24	10 - 26.4
Power consumption (W)	2.16	1.6 / 1.9	1.8
I load max. (A)	0.18 / 0.09	0.13 / 0.08	0.15 - 0.07

## NF 1.5 DCB

### PERFORMANCE DATA


Series model	Flow rate at atm. pressure (ml/min)	Max. suction height (mWg)	Max. pressure head (mWg)
NF 1.5 DCB	≥40	3	60

## NF 1.5 DCB-4


### PERFORMANCE DATA

Series model	Flow rate at atm. pressure (ml/min)	Max. suction height (mWg)	Max. pressure head (mWg)
NF 1.5 DCB-4	≥5 - 40	3	60


### NF 1.5 DCB

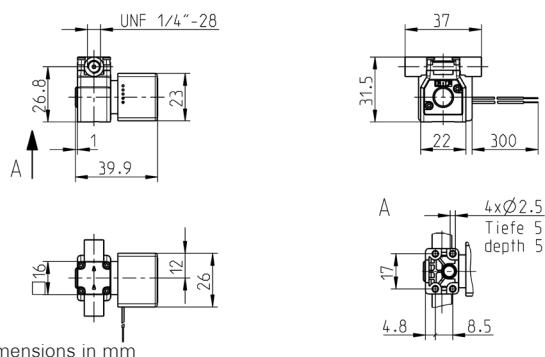


### NF 1.5 DCB-4

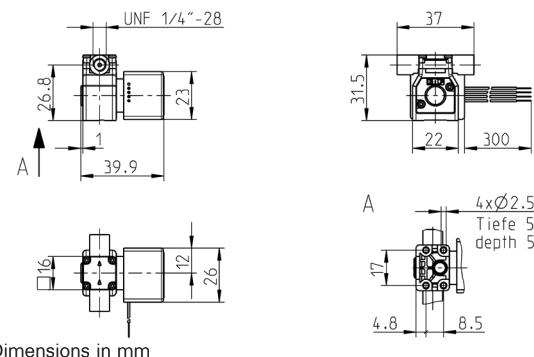


### NF 1.5 DCB FLOW CURVE

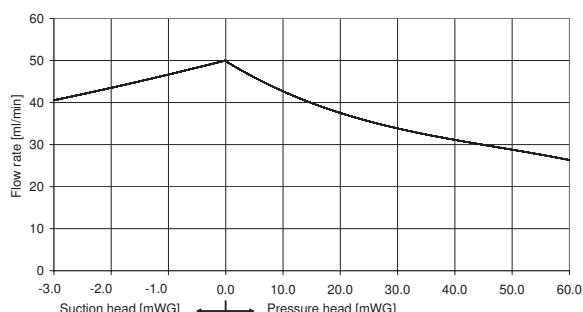

### NF 1.5 DCB-4 FLOW CURVE

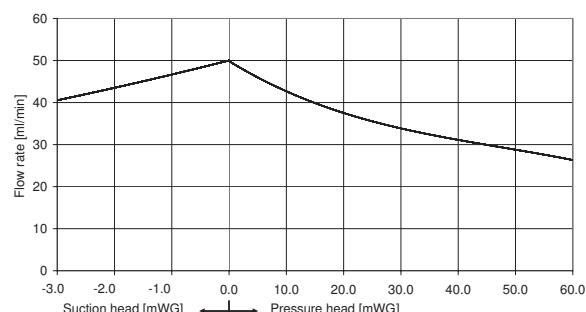

### NF 1.5 DCB-4 CONTROL CURVE

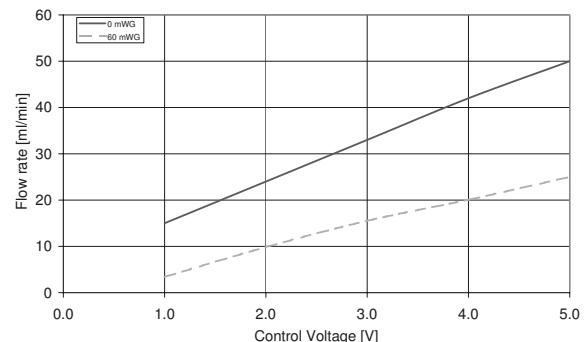


# NF 1.5 DC-M


## PERFORMANCE DATA

Series model	Flow rate at atm. pressure (ml/min)	Max. suction height (mWg)	Max. pressure head (mWg)
NF 1.5 DC-M	60	3	60

## NF 1.5 DC-M

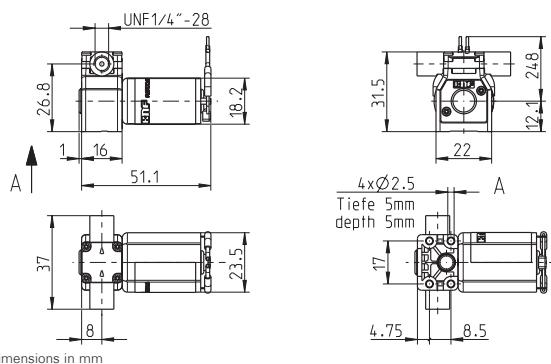

## NF 1.5 DC-M FLOW CURVE

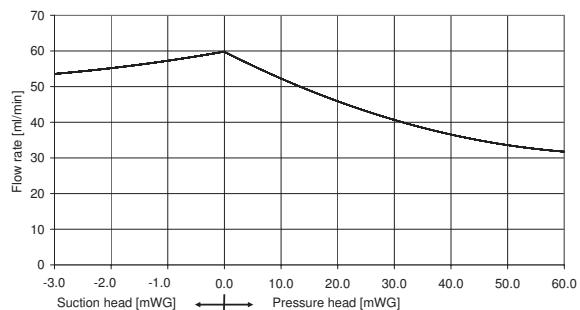

## OPTIONS

Name	Picture	Details
Motors		Various voltage options, higher and lower service life
Electrical connections		Molex, AMP etc.
Hydraulic connections		Internal thread, manifold connection etc.



### NSF National Sanitary Foundation

This certification will confirm that all of the pumps with the code .51 are certified for the use with foods/consumables.

## DIGITAL CUSTOMIZATION

Thanks to digital technology, this pump can be quickly adapted to the customer's system. This is done by parametrizing the firmware of the motor at KNF.

## ACCESSORIES

Description	Illustration	Details
Diaphragm pressure control valve		The pressure control valve can be used for a more accurate control of flow against a fluctuating back pressure, metering into a vacuum and from a pressurised system.
Pulsation damper		This very versatile pulsation damper reduces the vibration in hoses and pipes and it helps to remove pulsation which is preventing the system from functioning correctly.
Filter		KNF filters protect both pumps and other upstream instrumentation and hydraulic circuits against particulate, crystals and fibres which can improve optimum operation.
Tubing		Various diameters and materials

The performance values for the series models shown on this data sheet were determined under test conditions. The actual performance values may differ and depend in particular on the usage conditions and therefore on the specific application, on the parameters of the components involved in the user's system and on any technical modifications carried out which deviate from the standard configuration or the as delivered condition.

If individual designs have been created for specific customers on the basis of series models, other technical performance data may apply.

Before operation begins, the relevant operating instructions and/or assembly or installation instructions should be read and the safety information contained in these instructions should be noted.

KNF reserves the right to make changes to the product and the associated documentation without prior notice to the customer.



[www.knf.com](http://www.knf.com)