

Technical Data CarboSen EG



Fig. 1 CarboSen EG

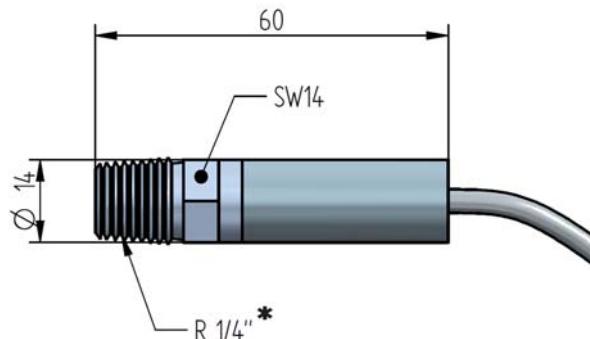


Fig. 2 Dimension CarboSen EG

* BSPT tapered Whitworth pipe thread according to DIN EN 10226.

Technical Data CarboSen EG

Dimension (L x D)	60 x 14 mm / 2.36 x 0.55" in
Weight	63 g / 0.14 lb (free cable ends, without plugs)
Material	stainless steel (1.4571)
Measurement range	CarboSen1.000EG: 0 ... 1,000 ppm
Measurement accuracy	CarboSen1.000EG: ±25 % of the measured value - not better than ±20 ppm - after previous calibration with operating conditions, - with almost constant fuel composition - after external compensation of the oxygen cross-sensitivity
Sensor signal	-750 ... +50 mV (signal is inverted within the device)
Response time t_{60}	< 3 s
Relaxation time (measurement readiness after over-load)	< 9 s
Offset to environment	< 5 ppm
Hysteresis	-
Linearity	-
Repeating precision	-
Ambient pressure dependency	-
Differential pressure dependency	-
Drift	-
Cross sensitivity	to CO ₂ : - none to O ₂ : - present
Influence of humidity	insignificant
Influence of installation position	none, if installed according to operating instructions
Influence of main voltage	none, if installed according to operating instructions
Influence of leakage	none, if installed according to operating instructions

Technical Data CarboSen EG

Technical Data CarboSen EG

Pressure influence of measuring gas	-
Power supply voltage for heating	12 V PWM with sign change
Sensor temperature	approx. 630 °C / 1,166 °F with temperature factor $t_f = 2.6$
Heating power consumption	approx. 3.5 W with temperature factor $t_f = 2.6$ (max. 6 W)
Heating current	approx. 350 mA with temperature factor $t_f = 2.6$
Heating resistance	approx. $9.5 \pm 1 \Omega$ with temperature factor $t_f = 1.0$ (room temperature) approx. 25Ω with temperature factor $t_f = 2.6$
Internal sensor resistance	approx. $300 \pm 150 \Omega$ with temperature factor $t_f = 2.6$
Lifetime	> 3 years (in case of light fuel oil and natural gas)
Heating-up time	> 30 s
Measurement principle	mixed potential-solid electrolyte sensor

Conditions of Use

Mounting/measuring gas extraction	directly in flue gas channel/in situ
Leakage	$qL^* \leq 100 \text{ cm}^3/\text{h}$
Mounting position	up to 85° against vertical
Permissible fuels	residue-free, gaseous hydrocarbons, natural gas, light fuel oil ***
Permissible measuring gas humidity	100 % relativ humidity, condensing**
Permissible measuring gas temperature	at sensor head: -20 ... +200 °C / -4 ... +392 °F
Permissible measuring gas speed	< 2 m/s / 6.56 ft/s (measured at measuring gas temperature of 25 °C / 77 °F. In case of smaller measuring gas temperatures it might be necessary to protect the probe from the incident flow)

* According to DIN V 18160-1:2006-01, leakage towards environment through housing and mounting.

** Protect from drops/splash water/water

*** Direct measurement in combustion gases is not possible.

Environmental Conditions

Operation	permissible temperature range	on cable bushing	-20 ... +150 °C / -4 ... +302 °F
Transport	permissible temperature range		-40 ... +60 °C / -40 ... +140 °F
Storage	permissible temperature range		-20 ... +40 °C / -4 ... -40 °F
Degree of protection	DIN EN 60529	IP64 (in mounted condition)	

NOTICE

The limits of the technical data must be strictly adhered to.

Technical Data CarboSen EG

Order Information

CarboSen EG in screw-in housing, R 1/4" thread Whitworth, SW14, connecting cable 1.5 m / 4.92" in

For detection of combustible gases (CO_e), integrated in stainless steel housing, flue gas temperature up to 200 °C / 392 °F, 100 % relative humidity, condensating

Description/Type	Order no.
CarboSen 1.000 EG in screw-in housing, R 1/4" thread Whitworth, SW14 recommended detection range up to 1,000 ppm CO _e	658R0004

Additional necessary: Electronic evaluation unit CarboSen Transmitter CT2-F, probe connection to terminals

Mounting Accessories for CarboSen EG

Description/Type	Order no.
Teflon sealing tape 12 mm x 12 m x 0.1 mm / 0.47" in x 39.37 ft x 0.004" in	655P4476

CE

The information in this publication is subject to technical changes.



**LAMTEC Meß- und Regeltechnik
für Feuerungen GmbH & Co. KG**

Wiesenstraße 6

D-69190 Walldorf

Telefon: +49 (0) 6227 6052-0

Telefax: +49 (0) 6227 6052-57

info@lamtec.de
www.lamtec.de

