


DATA SHEET

## Vibro-Meter®

### APF195 24 V<sub>DC</sub> 0.26 A power supply

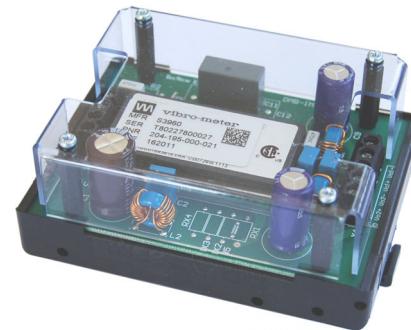

EAC

#### KEY FEATURES AND BENEFITS

- From the Vibro-Meter® product line
- Input: 9.4 to 36.0 V<sub>DC</sub>
- Output: Two 24 V<sub>DC</sub> 0.13 A
- DIN-rail mounting

#### APPLICATIONS

- Outputs can be connected in parallel for increased output current
- Ideal for use with machinery monitoring systems

#### DESCRIPTION

The APF195 is a 24 V<sub>DC</sub> 0.26 A power supply for use in industrial applications such as machinery monitoring.

A single output of an APF195 power supply can be used to power any equipment requiring 24 V<sub>DC</sub> up to 0.13 A (3.1 W), for example, external hardware such as GS112x galvanic separation units. Both outputs of an APF195 can be connected in parallel in order to increase performance and provide up to 0.26 A (6.2 W).

The APF195 is DIN-rail mounting and is typically installed in a cubicle containing other equipment such as VM600 and/or VibroSmart® monitoring systems.

For specific applications, contact your local Meggitt representative.



Information contained in this document may be subject to export control regulations of the European Union, USA or other countries. Each recipient of this document is responsible for ensuring that transfer or use of any information contained in this document complies with all relevant export control regulations. ECN N/A.

## SPECIFICATIONS

### Electrical

Input voltage	: 9.4 to 36.0 V <sub>DC</sub>
Efficiency	: >80% typ.
Nominal output	
• Voltage	: 2 × 24 V <sub>DC</sub>
• Current	: 2 × 0.13 A
• Power	: 6.2 W
Line regulation	: ±1%
Load regulation	: ±3% (for 10 to 100% load variation)
Ripple (output voltage noise)	: <50 mV <sub>PK-PK</sub> typ. <240 mV <sub>PK-PK</sub> max.
Parallel connection	: The two outputs can be connected in parallel in order to provide increased output current Note: External diodes are not required.
Protection against permanent short-circuit (current limit)	: Yes
Protection against output over-voltage (Zener diodes)	: Yes. Note: The main purpose of this feature is to prevent the APF195 from generating an over-voltage. It is not designed to withstand external over-voltages applied to the outputs.

### Environmental

Temperature	: -40 to 85°C (-40 to 185°F)
Humidity	: <90% RH (non-condensing)

### Approvals

Conformity	: EAC marking, Eurasian Customs Union (EACU) certificate/ declaration of conformity
Electromagnetic compatibility	: IEC/EN 61000-4. TR CU 020/2011.
Electrical safety	: IEC/EN 60950 and UL/CSA 60950. TR CU 004/2011.

### Physical

Mounting	: Mounts on a TH 35 DIN rail (according to EN 50022 / IEC 60715). For example, TH 35-15 or TH 35-7.5.
Dimensions	: 50 × 72 × 97 mm (1.97 × 2.83 × 3.82 in)

## ORDERING INFORMATION

To order please specify

Type	Designation	Ordering number (PNR)
APF195	24 V <sub>DC</sub> 0.26 A power supply	204-195-000-021

## RELATED PRODUCTS

APF196	24 V <sub>DC</sub> 3 A power supply	Refer to corresponding data sheet
APF197	24 V <sub>DC</sub> 5 A power supply	Refer to corresponding data sheet
APF198	24 V <sub>DC</sub> 7.5 A power supply	Refer to corresponding data sheet
APF200	24 V <sub>DC</sub> 3.75 A power supply with Ex certification	Refer to corresponding data sheet
APF201	24 V <sub>DC</sub> 7.5 A power supply with Ex certification	Refer to corresponding data sheet
APF202	24 V <sub>DC</sub> 5 A power supply with Ex certification	Refer to corresponding data sheet
ASPS	VM600 auxiliary sensor power supply	Refer to corresponding data sheet

Meggitt (Meggitt PLC) is a leading international engineering company, headquartered in England, that designs and delivers high-performance components and subsystems for aerospace, defence and selected energy markets. Meggitt comprises four customer-aligned divisions: Airframe Systems, Engine Systems, Energy & Equipment and Services & Support.

The Energy & Equipment division includes the Energy Sensing and Controls product group that specialises in sensing and monitoring solutions for a broad range of energy infrastructure, and control valves for industrial gas turbines, primarily for the Power Generation, Oil & Gas and Services markets. Energy & Equipment is headquartered in Switzerland (Meggitt SA) and incorporates the Vibro-Meter® product line, which has over 65 years of sensor and systems expertise and is trusted by original equipment manufacturers (OEMs) globally.

 All information in this document, such as descriptions, specifications, drawings, recommendations and other statements, is believed to be reliable and is stated in good faith as being approximately correct, but is not binding on Meggitt (Meggitt SA) unless expressly agreed in writing. Before acquiring and/or using this product, you must evaluate it and determine if it is suitable for your intended application. You should also check our website at [www.meggittsensing.com/energy](http://www.meggittsensing.com/energy) for any updates to data sheets, certificates, product drawings, user manuals, service bulletins and/or other instructions affecting the product.

Unless otherwise expressly agreed in writing with Meggitt SA, you assume all risks and liability associated with use of the product. Any recommendations and advice given without charge, whilst given in good faith, are not binding on Meggitt SA. Meggitt (Meggitt SA) takes no responsibility for any statements related to the product which are not contained in a current Meggitt SA publication, nor for any statements contained in extracts, summaries, translations or any other documents not authored and produced by Meggitt SA.

The certifications and warranties applicable to the products supplied by Meggitt SA are valid only for new products purchased directly from Meggitt SA or from an authorised distributor of Meggitt SA.

In this publication, a dot (.) is used as the decimal separator and thousands are separated by thin spaces. Example: 12345.67890.

Copyright© 2019 Meggitt SA. All rights reserved. The information contained in this document is subject to change without prior notice.

### Sales offices

Meggitt has offices in more than 30 countries. For a complete list, please visit our website.

### Local representative

### Head office

Meggitt SA  
Rte de Moncor 4  
PO Box 1616  
CH-1701 Fribourg  
Switzerland

Tel: +41 26 407 11 11  
Fax: +41 26 407 13 01  
[energy@ch.meggitt.com](mailto:energy@ch.meggitt.com)  
[www.meggittsensing.com/energy](http://www.meggittsensing.com/energy)  
[www.meggitt.com](http://www.meggitt.com)

