Full, empty and demand indicator
for vertical mounting with pendulum shaft

Signal contact	2 A / 250V AC potential-free
Type of protection	**IP66** in accordance with DIN EN 60529
Maintenance	none

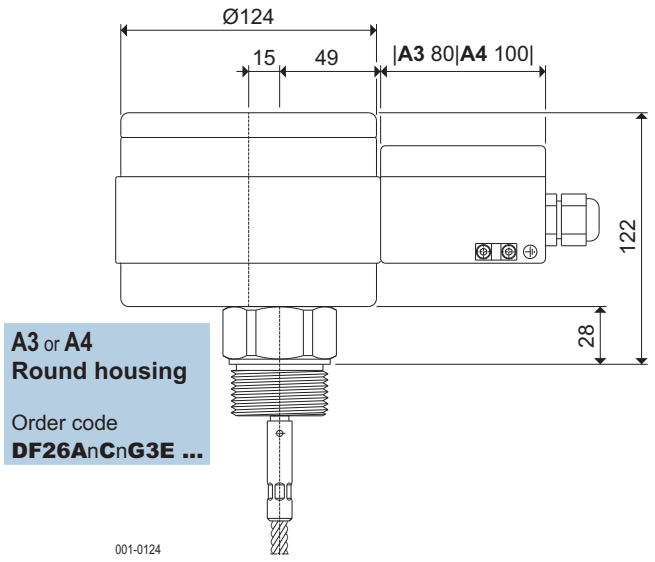

A3 or **A4**
Round housing

Order code
DF26AnCnG3E ...

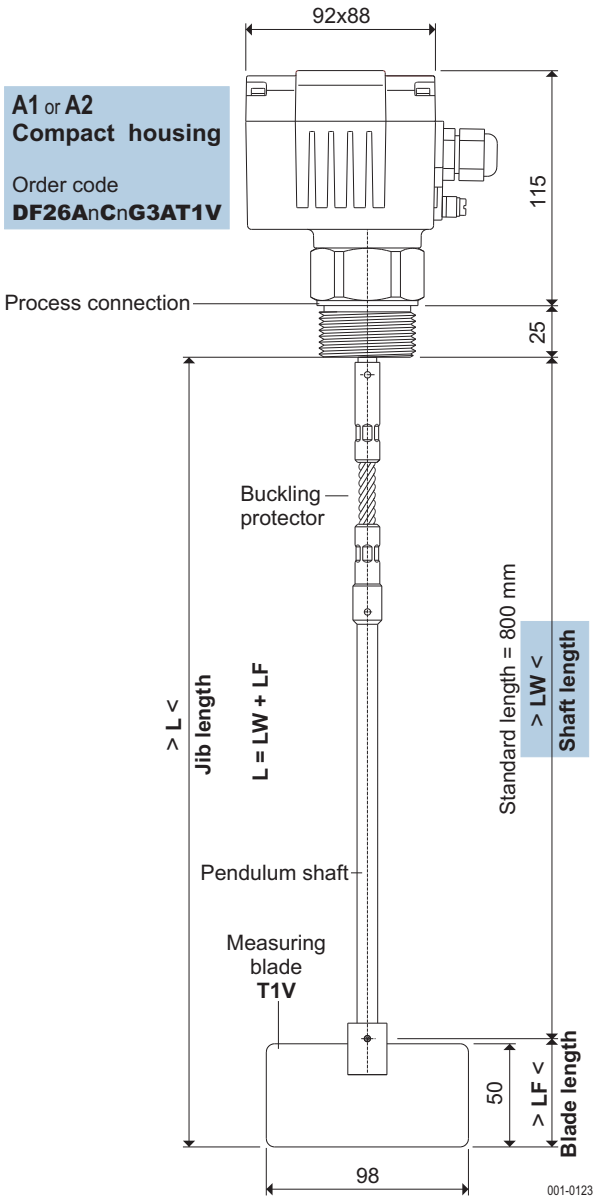

A1 or **A2**
Compact housing

Order code
DF26AnCnG3AT1V

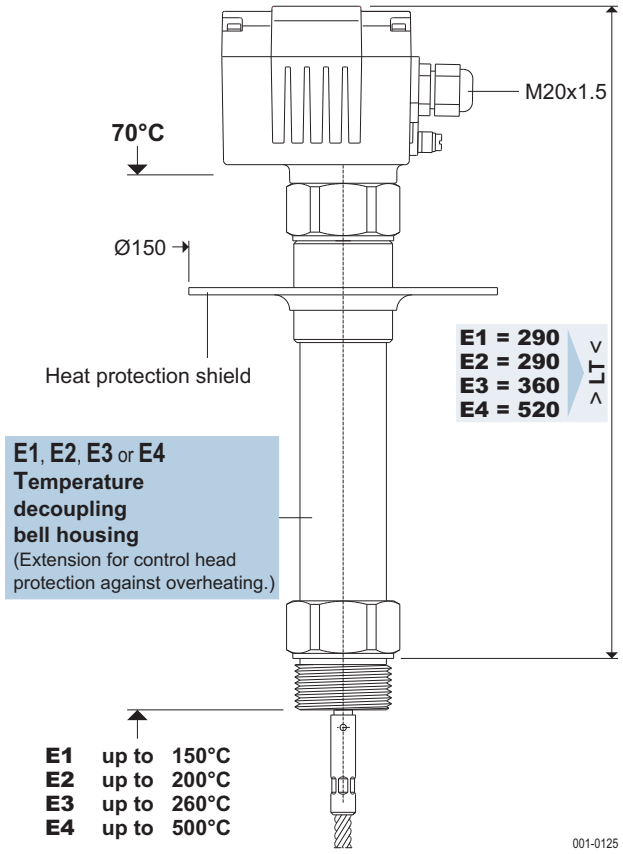

E1, **E2**, **E3** or **E4**
Temperature decoupling bell housing
(Extension for control head protection against overheating.)

You will find further technical details under appliance information **DF-GI-..**