


MOOG

Servo valve with Bushing and
integrated 24 Volt Electronics
D661 Highresponse Series
ISO 4401 Size 05

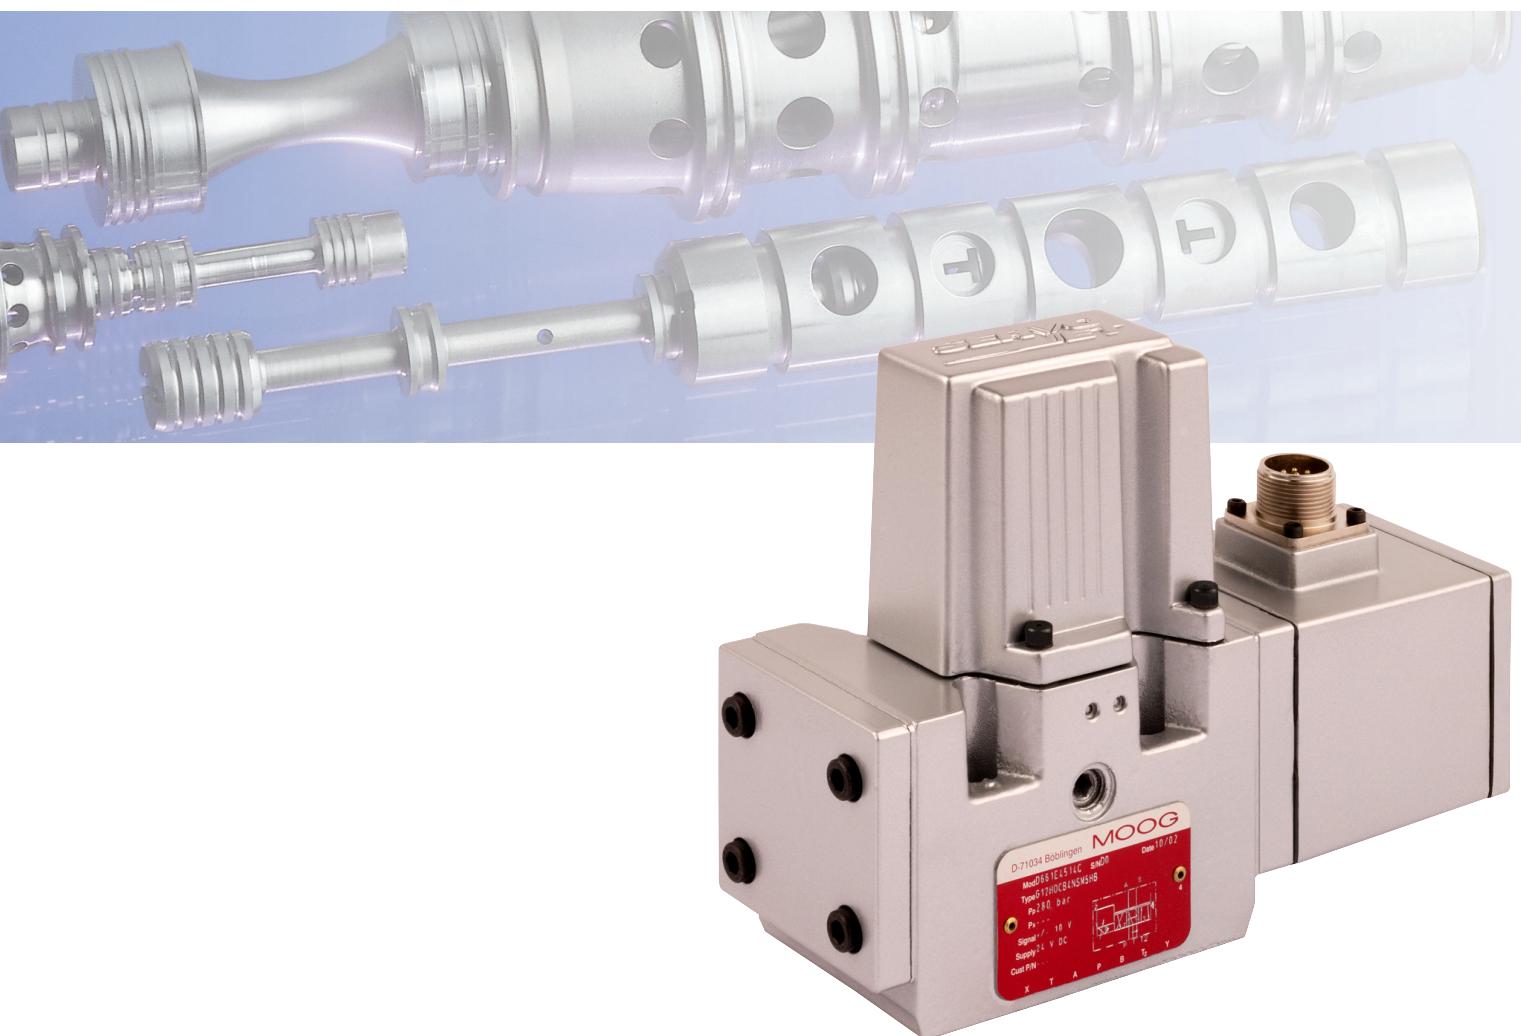

D661 Highresponse Series

Two stage servovalves

with highresponse pilot stage

The flow control servovalves D661 Highresponse Series are throttle valves for 2-, 3- and 4-way applications. These valves are suitable for electrohydraulic position, velocity, pressure or force control systems including those with high dynamic response requirements.

The spool of the main stage is driven by a jet pipe pilot stage in an electrically closed loop.

The integrated electronics of the valve is a new development featuring SMD technology and requires 24 VDC power supply.

Operational features of the ServoJet Highresponse pilot stage

The ServoJet Highresponse pilot stage consists mainly of torque motor, jet pipe and receiver. A current through the coil displaces the jet pipe from neutral. This displacement combined

with the special shape of the nozzle directs a focussed fluid jet more into one receiver opening than the other. The jet now produces a pressure difference in the control ports. This pressure difference results in a pilot flow which in turn causes a spool displacement. The pilot stage drain is through the annular area around the nozzle to tank.



The valve series described in this catalogue has successfully passed EMC tests required by EC Directive. Please take notice of the respective references in the electronics section.

The actual flow depends on the electrical command signal and the valve pressure drop. For different values of valve pressure drop, the flow may be calculated by the square root function for a sharp edged orifice:

$$Q = Q_N \sqrt{\frac{\Delta p}{\Delta p_N}}$$

Q [l/min] = calculated flow
 Q_N [l/min] = rated flow
 Δp [bar] = actual valve pressure drop
 Δp_N [bar] = rated valve pressure drop

If large flow rates with high valve pressure drop are required an appropriate higher pilot pressure has to be chosen to overcome the flow forces. An approximate value can be calculated as follows:

$$p_x \geq 1,7 \cdot 10^{-2} \cdot \frac{Q}{A_K} \cdot \sqrt{\Delta p}$$

Q [l/min] = max. flow
 Δp [bar] = valve pressure drop with Q
 A_K [cm²] = spool drive area
 p_x [bar] = pilot pressure
 The pilot pressure p_x has to be at least 25 bar above the return pressure of the pilot stage.

Principle of operation

An electric command signal (flow rate setpoint) is applied to the integrated control amplifier which drives the pilot stage. Thus the deflected ServoJet highresponse system produces a pressure difference across the drive areas of the spool and effects its movement. The position transducer which is supplied via an oscillator measures the position

of the spool (actual value, position voltage). This actual value is being rectified by a demodulator and fed back to the control amplifier where it is compared with the command value. The control amplifier drives the torque motor until command voltage and feedback voltage are equal. Thus, the position of the spool is proportional to the electric command signal.

This catalog is for users with technical knowledge. To ensure all necessary characteristics for function and safety of the system, the user has to check the suitability of the products described herein. The products described herein are subject to change without notice. In case of doubt, please contact Moog.

Moog is a registered trademark of Moog Inc. and its subsidiaries. All trademarks as indicated herein are the property of Moog Inc. and its subsidiaries.

For the full disclaimer refer to www.moog.com/literature/disclaimers.

For the most current information, visit www.moog.com/industrial or contact your local Moog office

Our quality management system is conformed to DIN EN ISO 9001.

Operating pressure range

Ports P, A and B up to 350 bar (5000 psi)
Ports T, T₂ for Y internal up to 210 bar (3000 psi)
Ports T, T₂ for Y external up to 350 bar (5000 psi)

Temperature range

Ambient -20° C to +60° C (-4° F to +140° F)
Fluid -20° C to +80° C (-4° F to +176° F)

Seal material NBR, FPM and others on request

Operating fluid mineral oil based hydraulic fluid (DIN 51524, part 1 to 3), other fluids on request
Viscosity recommended 15 to 100 mm²/s (0,02 to 0,16 in²/s)
allowable 5 to 400 mm²/s (0,008 to 0,62 in²/s)

System filtration: Pilot stage: high pressure filter (without bypass, but with dirt alarm) mounted in the main flow and if possible directly upstream of the valve. **Main stage:** high pressure filter as for the pilot stage. In combination with a fast regulating variable displacement pump an off-line filter is recommended.

Class of cleanliness The cleanliness of the hydraulic fluid particularly effects the performance (spool positioning, high resolution) and wear (metering edges, pressure gain, leakage) of the valve.

Recommended cleanliness class ISO 4406: 1999

For normal operation: < 19 / 16 / 13
For longer life: < 17 / 14 / 11

Filter rating recommended


For normal operation: $\beta_{15} \geq 75$ (15µm absolute)
For longer life: $\beta_{10} \geq 75$ (10µm absolute)

Installation options

Vibration 30 g, 3 axes



Degree of protection EN 60529 class IP 65, with mating connector mounted

Shipping plate Delivered with an oil sealed shipping plate

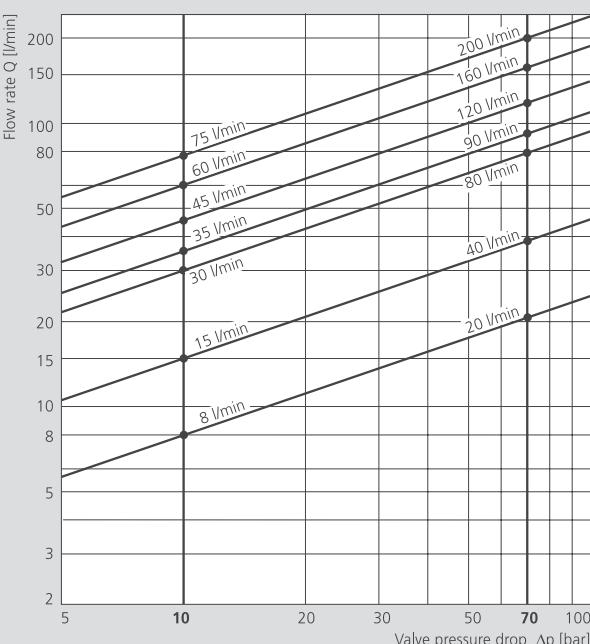

Valve flow diagram

Valve flow for maximum valve opening (100% command signal) as a function of the valve pressure drop

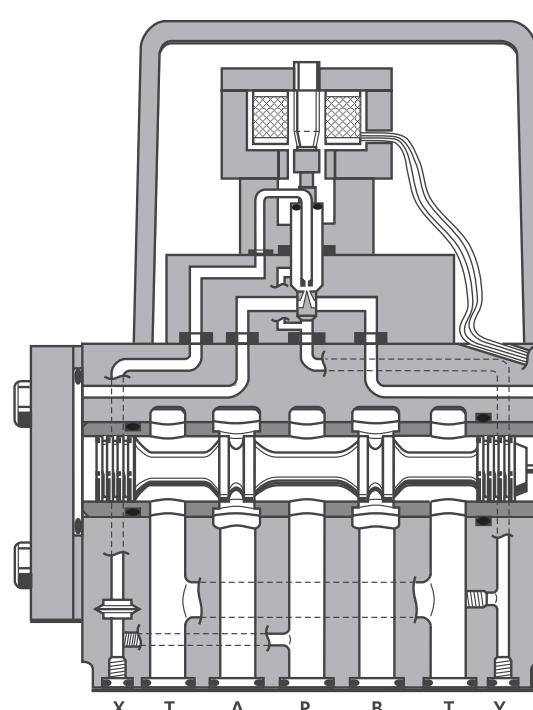

Servovalve
D661 Highresponse Series
with **SERVO JET** pilot stage

D661 Highresponse Series

Technical data

Model . . . Type

Mounting pattern ISO with additional 2nd T-port
Valve version

Pilot stage ServoJet

Pilot connection Optional, internal or external

Mass

Rated flow ($\pm 10\%$) at $\Delta p_N = 35$ bar (500 psi) per land [l/min (gpm)] max.

Operating pressure Main stage: ports P with X external, A, B

port T, T_2 with Y internal

port T, T_2 with Y external

regular version

Pilot stage: with dropping orifice (on request)

for 0 to 100 % stroke

Response time* [ms]

Threshold* [%]

Hysteresis* [%]

Null shift [%]

Null leakage flow* total max. (~ critical lap)

Pilot leakage flow* max., for 100% step input

Pilot flow* [l/min (gpm)]

Spool stroke [mm (in)]

Spool drive area [cm² (sq in)]

* at operating or pilot pressure 210 bar (3000 psi), fluid viscosity of 32 mm²/s (0.05 in²/s) and fluid temperature of 40° C (104° F)

D661 - . . . G . . . C

ISO 4401 - 05 - 05 - 0 - 94

4-way

2-stage with bushing spool assembly

highresponse

X and Y	X and Y	X and Y
5,7 (12.6)	5,7 (12.6)	5,7 (12.6)

20/90 (5.3/23.8)	40/80 (10.6/21.1)	120/160/200 (31.7/42.3/52.8)
------------------	-------------------	------------------------------

X and Y	X and Y	X and Y
---------	---------	---------

350 (5000)	350 (5000)	350 (5000)
------------	------------	------------

210 (3000)	210 (3000)	210 (3000)
------------	------------	------------

350 (5000)	350 (5000)	350 (5000)
------------	------------	------------

280 (4000)	280 (4000)	280 (4000)
------------	------------	------------

350 (5000)	350 (5000)	350 (5000)
------------	------------	------------

6,5	11	14
-----	----	----

< 0,1	< 0,08	< 0,05
-------	--------	--------

< 0,4	< 0,3	< 0,2
-------	-------	-------

< 2,0	< 1,5	< 1,0
-------	-------	-------



3,9/5,4 (1.0/1.4)	4,7 (1.2)	5,4 (1.4)
-------------------	-----------	-----------

2,6 (0.7)	2,6 (0.7)	2,6 (0.7)
-----------	-----------	-----------

2,6 (0.7)	2,6 (0.7)	2,6 (0.7)
-----------	-----------	-----------


$\pm 1,3$ (0.051)	$\pm 2,0$ (0.079)	$\pm 3,0$ (0.118)
-------------------	-------------------	-------------------

1,35 (0.21)	1,35 (0.21)	1,35 (0.21)
-------------	-------------	-------------

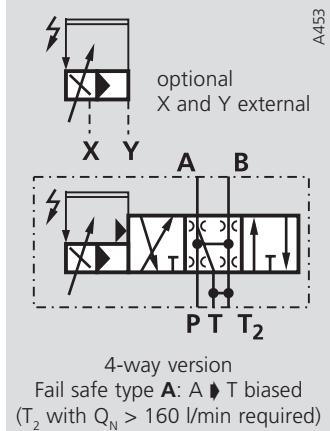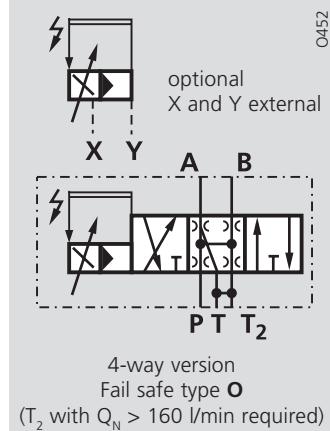


Typical characteristic curves at operating or pilot pressure 210 bar (3000 psi), fluid viscosity of 32 mm²/s (0.05 in²/s) and fluid temperature of 40° C (104° F)


Flow vs. signal curves at $\Delta p_N = 35$ bar per land

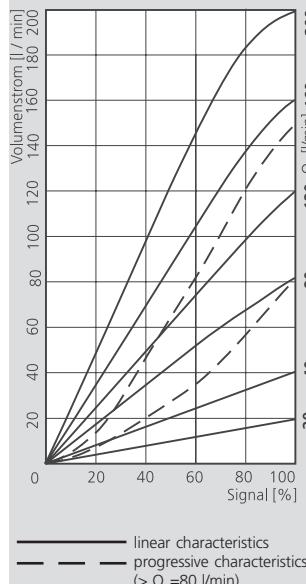


20/90 l/min Step response

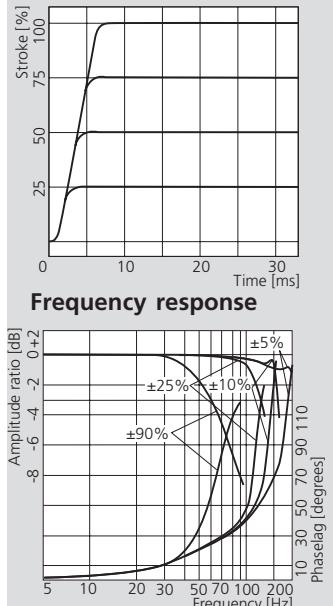

40/80 l/min Step response

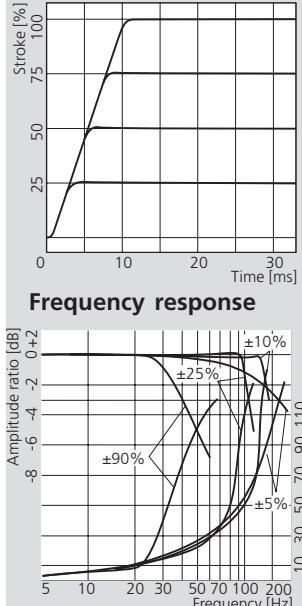

120/160/200 l/min Step response

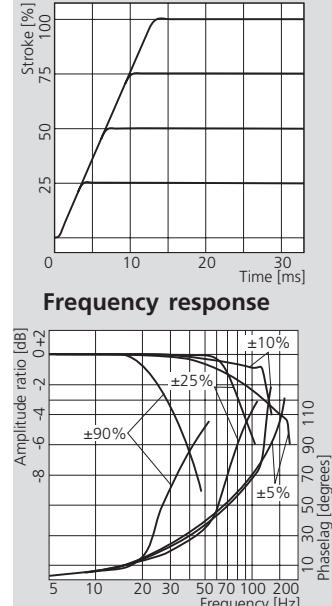


D661 Highresponse Series

Installation drawing

Spare parts, Accessories

MOOG

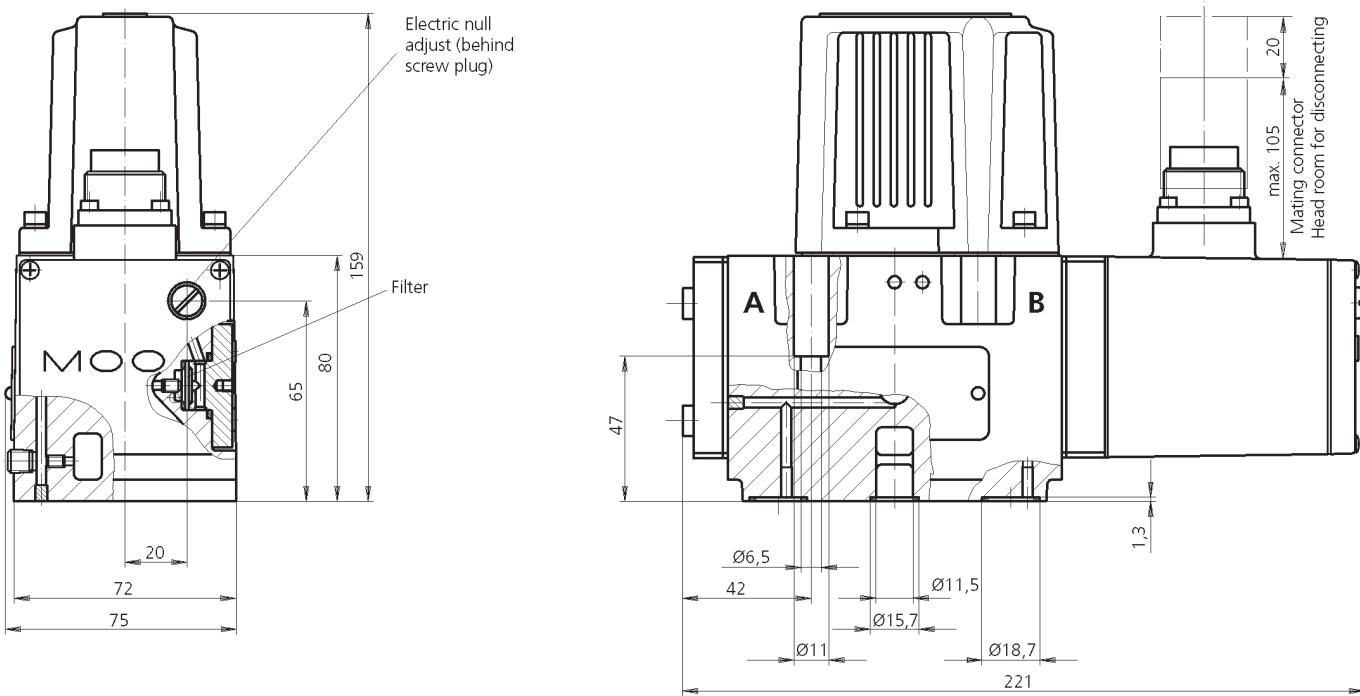

The mounting manifold must conform to ISO 4401-05-05-0-94.

Attention:

Mounting length min. 100 mm.


Notice O-ring recess dia of X and Y ports.

For valves in 4-way version with $Q_N > 160 \text{ l/min}$ the non standard 2nd return port T_2 must be used.

For maximum flow the manifold

ports P, T, A and B require to have **11,5 mm dia** (deviation from standard).

Mounting surface needs to be flat within 0,01 mm over a distance of 100 mm. Average surface finish value, Ra, better than 0,8 μm .

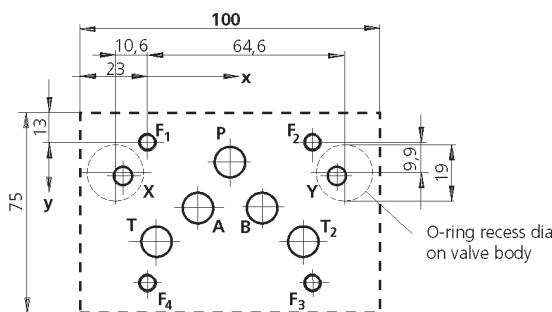

	P	A	B	T	T_2	X	Y	F_1	F_2	F_3	F_4
	Ø11,5	Ø11,5	Ø11,5	Ø11,5	Ø11,5	Ø6,3	Ø6,3	M6	M6	M6	M6
x	27	16,7	37,3	3,2	50,8	-8	62	0	54	54	0
y	6,3	21,4	21,4	32,5	32,5	11	11	0	0	46	46

Spare parts and Accessories

O-rings (included in delivery)		NBR 85 Shore	FPM 85 Shore
for P, T, T_2 , A, B	5 pieces ID 12,4 x Ø 1,8	45122 004	42082 004
for X, Y	2 pieces ID 15,6 x Ø 1,8	45122 011	42082 011
Mating connector, waterproof IP65 (not included in delivery)		for cable dia	
6+PE pole	EN 175201-804	min. 10 mm, max. 12 mm	
Flushing plates	for P, A, B, T, T_2 , X, Y	for P, T, T_2 , and X, Y	
	B67728 001	B67728 002	
Mounting manifolds	see special data sheet	B67728 003	
Mounting bolts (not included in delivery)		required torque	required
M 6 x 60 DIN EN ISO 4762-10.9	A03665 060 060	13 Nm	4 pieces
Replaceable filter	A67999 200	200 μm nominal	
O-rings for filter change		NBR 85 Shore	FPM 85 Shore
filter	1 piece ID 12 x Ø 2,0	66117 012 020	A25163 012 020
filter cover	1 piece ID 17,1 x Ø 2,6	—	—

D661 Highresponse Series

Valve electronics with supply voltage 24 Volt

Command signal 0 to ± 10 mA floating, Valves with current command input

The spool stroke of the valve is proportional to $I_D = -I_E$. 100 % valve opening P \rightarrow A and B \rightarrow T is achieved at $I_D = +10$ mA. At 0 mA command the spool is in centred position. The input pins D and E are inverting. Either pin D or E is used according to the required operating direction. The other pin is connected to signal ground at cabinet side.

Command signal 0 to ± 10 V, Valves with voltage command input

The spool stroke of the valve is proportional to $(U_D - U_E)$. 100 % valve opening P \rightarrow A and B \rightarrow T is achieved at $(U_D - U_E) = +10$ V. At 0 V command the spool is in centred position. The input stage is a differential amplifier. If only one command signal is available, pin D or E is connected to signal ground at cabinet side, according to the required operating direction.

Actual value 4 to 20 mA

The actual spool position value can be measured at pin F (see diagram below). This signal can be used for monitoring and fault detection purposes. The spool stroke range corresponds to 4 to 20 mA. The centred position is at 12 mA. 20 mA corresponds to 100 % valve opening P \rightarrow A and B \rightarrow T.


The position signal output 4 to 20 mA allows to detect a cable break when $I_F = 0$ mA.

For failure detection purposes it is advised to connect pin F of the mating connector and route this signal to the control cabinet.

General requirements

- Supply 24 VDC, min. 18 VDC, max. 32 VDC
Current consumption max. 300 mA
- All signal lines, also those of external transducers, shielded.
- Shielding connected radially to \perp (0 V), power supply side, and connected to the mating connector housing (EMC).
- EMC:** Meets the requirements of EN 55011:1998, class B, EN 50082-2:1995, performance criterion class A.
- Minimum cross-section of all leads $\geq 0,75$ mm². Consider voltage losses between cabinet and valve.
- Note: When making electric connections to the valve (shield, protective earth) appropriate measures must be taken to ensure that locally different earth potentials do not result in excessive ground currents. See also MOOG Application Note AM 353 E.

Circuit diagram for measurement of actual value I_F (position of main spool)



Note: Enable input


With enable signal off, the main spool will move to a safe position.

- a) Centred position (unbiased pilot valve) function code **A1**)
- b) End position (biased pilot valve) function code **B1**)

¹⁾ see type designation

Wiring for valves with 6+PE pole connector

to EN 175201 Part 804 ²⁾, and mating connector (type R and S, metal shell) with leading protective earth connection (\perp). See also wiring instructions AM 426 E.

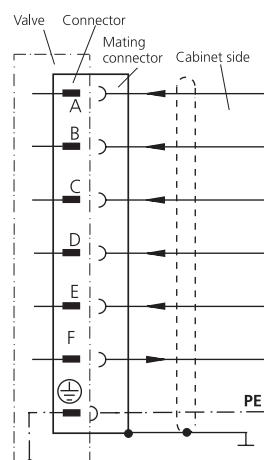

Function	Voltage command	Current command
Supply	24 VDC (min. 18 VDC, max. 32 VDC). $I_{max} = 300$ mA	
Supply / Signal ground	\perp (0 V)	
Enabled Not enabled	$U_{C-B} > +8,5$ VDC $U_{C-B} < +6,5$ VDC	$I_e = 2,0$ mA at 24 VDC (see note above)
Input rated command (differential)	$U_{D-E} = 0$ to ± 10 V $R_e = 10$ k Ω Input voltage for U_{D-B} and U_{E-B} for both signal types is limited to min. -15 V and max. +32 V	Input command $I_D = -I_E$: 0 to ± 10 mA ($R_e = 200$ Ω) Input command (inverted) $I_E = -I_D$: 0 to ± 10 mA
Output actual value spool position	$I_{F-B} = 4$ to 20 mA. At 12 mA spool is in centred position. $R_L = 100$ to 500 Ω Signal code D (see page 7): $U_{F-B} = 2$ to 10 V. At 6 V spool is in centred position. $R_a = 500$ Ω	
Protective earth		

²⁾ formerly DIN 43563

D661 Highresponse Series

Ordering information

MOOG


Model-Number		Type designation												
D661	G	.	.	C	.	S	2	-	.
Specification status														
-	Series specification													
K	Explosion proof version on request													
Z	Special specification													
Model designation														
assigned at the factory														
Factory identification														
Valve version														
G	Standard spool													
Rated flow														
Q _N [l/min] at Δp _N														
70 bar														
10 bar														
stroke [mm]														
08	20	8	$\pm 1,3$											
15	40	15	$\pm 2,0$											
30	80	30	$\pm 2,0$											
35	90	35	$\pm 1,3$											
45	120	45	$\pm 3,0$											
60	160	60	$\pm 3,0$											
75	200	75	$\pm 3,0$											
Maximum operating pressure														
B	70 bar													
H	280 bar.	At p _x ≤ 280 bar (X and Y external) operating pressure in ports P, A, B and T up to 350 bar allowed.												
K	350 bar													
Bushing / spool type														
O	4- way: critical lap, linear characteristic													
S	4- way: critical lap, curvilinear characteristic, > Q _N = 80 l/min													
X	Special bushing on request													
Pilot stage version														
C	ServoJet-Highresponse													
Function code														
O	No enable input. Pin C not used													
A	Without enable signal applied the spool moves to adjustable centred position													
B	Without enable signal applied the spool moves to defined position A \downarrow T or B \downarrow T													
Valve dynamics¹														
-	Standard performance													
Electric supply														
2	24 V DC (18 to 32 VDC)													
Signals for 100% spool stroke														
Command		Output												
D	± 10 V	2 to 10 V												
M	± 10 V	4 to 20 mA												
X	± 10 mA	4 to 20 mA												
Valve connector														
S	6 + PE - pole EN 175201-804 Type R or S													
Seal material														
N	NBR Standard													
V	FPM (Viton) option													
Pilot connections														
Supply		Return												
4	internal	internal												
5	external	internal												
6	external	external												
7	internal	external												
Spool position without electric supply														
O	undefined (no fail safe function)													
Mechanical fail safe versions														
A	P \downarrow B, A \downarrow T connected	achieved at p _x > 25 bar												
B	P \downarrow A, B \downarrow T connected	p _x > 25 bar												

¹ Please note: product code description was adjusted in Rev. A, November 2025. For further information visit <https://www.moog.com/products/servovalves-servo-proportional-valves/industrial/legacy-servo-valves.html>.

Options may increase price.
All combinations may not be available.

Preferred configurations are highlighted.
Technical changes are reserved.

MOOG

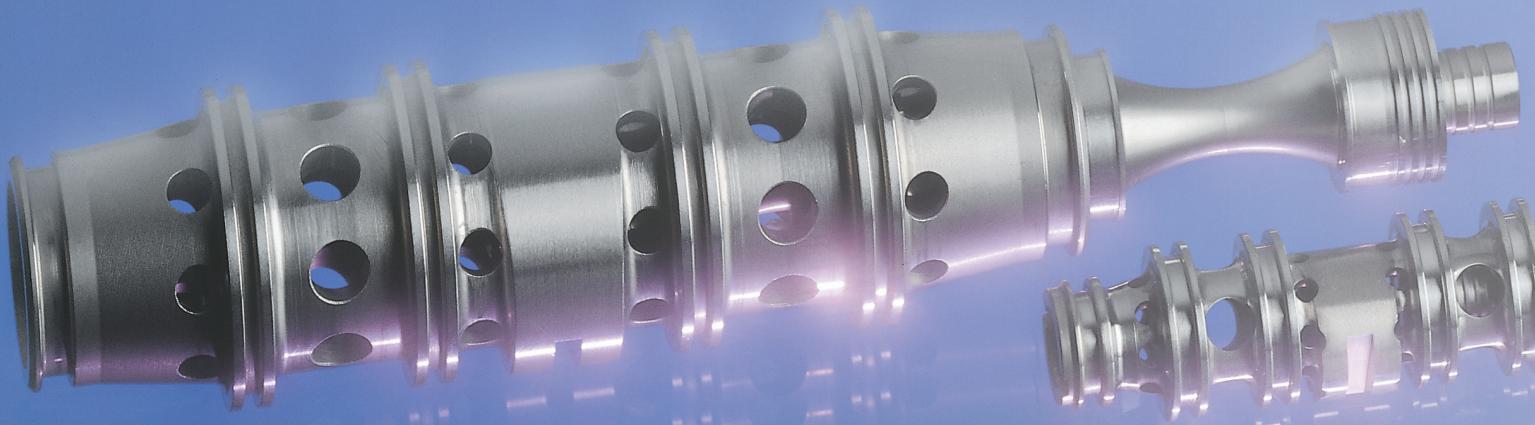

Moog is a registered trademark of Moog Inc. and its subsidiaries.
All trademarks as indicated herein are the property of Moog Inc. and its subsidiaries.
©2025 Moog Inc. All rights reserved. All changes are reserved.

D661-G C Highresponse Series
Moog KEM/Rev. A, November 2025, Id. CDL69170-en

MOOG GmbH
Hanns-Klemm-Straße 28
D - 71034 Böblingen
Postfach 1670
D - 71006 Böblingen
Telephone +49 (0)7031 622-0
Telefax +49 (0)7031 622-191
Internet: www.moog.com