

General information

PVS24020201113

The GD 4 Compression Load Cell has been designed for working in harsh environments. The GD 4 cell is a tailor-made product, designed and built according to the specific needs of the customer.



Suggested related products

A highly performing weighing system must be accurate, perfectly calibrated and well maintained. In order to improve the load cell performance and to optimize its functioning, you may need the following products:

Weight Transmitter DAT 1400

Tester 1008 TESTER 1008

Double Shear Beam Load Cell DDR

Shear beam load cells SBR

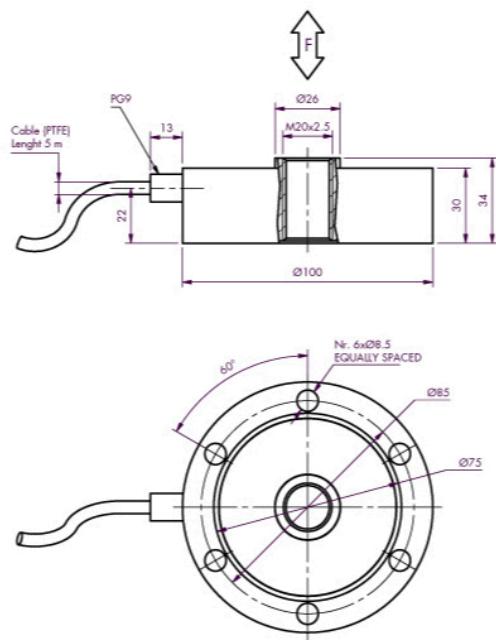
All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Technical specifications

PVS24020201113

Rated load RL:	500, 1.000, 2.500, 5.000, 10.000, 20.000 kg
Combined error:	±0,05 % RO
Repeatability:	±0,03 % RO
Creep (30 minutes):	±0,03 % RO
Safe overload:	150 % RL
Ultimate overload:	300 % RL
Material:	Stainless steel
Degree of protection:	IP65
Compensated Temperature:	-10 ÷ +40 °C
Temperature range:	-20 ÷ +70°C
Temperature effect on zero balance:	±0,003 % RO/°C
Temperature effect on output:	±0,002 % output/°C
Rated output RO:	2 mV/V ±0,1%
Zero balance:	±1 % RO
Insulation resistance:	> 2000 MOhm
Input resistance:	700 ÷ 710 Ohm
Output resistance:	700 ÷ 705 Ohm
Recommended input:	5 ÷ 15 Vdc/ac
Cable Length:	5, 10, 20 m

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).


Electrical Connection

+Supply	Red
-Supply	Black
+Signal	Green
-Signal	White
+Rif	Orange
-Rif	Blue

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).