

■ Prolog

Industrial valves made by company Stahl-Armaturen PERSTA GmbH are designed according to DIN-Standards, EN-Standards and according to the technical rules like AD and the European Pressure Vessel Guideline 97/23/EG.

Design, manufacture and testing of these valves was carried out on condition that the valves are operated under normal operating conditions. Normal operating conditions contain for example the following:

- Operation with liquid or gaseous media, without special corrosive, chemical or abrasive influences.
- Frequency of temperature-change of app. 3 – 6 ° K per minute.
- Usual flow rates, depending on the kind of medium and the range of application of the valve.
- Operation without additional outer influences like pipeline-forces, vibrations, wind load stressing, earthquake, corrosive environment, fire, operation load stressing, disintegration pressure of unstable fluids, etc.



If the purchaser expects stresses deviating from the normal operating conditions he has to indicate these requirements unambiguously and completely in the inquiry as well as in the order. This would allow us, as the valve manufacturer, to work out corresponding measures and to suggest them to the customer. These measures could be for example:

- Special choice of the body material
- Higher wall-thickness
- Protection of areas which are endangered by wear
- Special gaskets and bolt connections
- Special operation instructions depending on the medium and the kind of operation
- Special coatings
- Additional equipment to avoid excessive overpressure
- Special design for control operation, etc

During planning and installation of the pipeline the customer should take measures which minimize additional dangers and pressures on the valves, on the piping system and on the environment, for example by:

- Installation of vibration dampers
- Consideration of a security final position in case of break down of energy
- Taking measures to ensure the safe drainage of dangerous media in case of leakage, etc

Please see our relevant Instruction Operational Maintenance manual for further information and warnings which have to be considered for the operation of industrial valves.

Imprint

Copyright in and to this documents shall remain with Stahl-Armaturen PERSTA GmbH.

Duplication, application or notification to a third party is forbidden, criminal and institute legal proceeding (German Copyright Act, UWG, BGB). All rights, including rights created by patent grant or registration of a utility model, are reserved.

■ Table of content

■ Designation	■ Type	■ Size	■ Rating	■ Page
---------------	--------	--------	----------	--------

■ Globe valves

Globe valve	200 AE/BE/AJ/BJ	DN 10-50	PN 10-160	1-4
Lift check valve	240 MT	DN 10-50	PN 10-160	1-4
Globe valve	200 AE/BE/AJ/BJ	DN 65-200	PN 10-160	5-8
Lift check valve	240 MT	DN 65-200	PN 10-160	5-8
Bellow seal globe valve / VALTRA	200 AL	DN 15-400 (200)	PN 10-160	9-10
High pressure globe valve HD 91	200 JM	DN 10-65/50	PN 320	11-14
High pressure globe valve HD 2000	200 LM/202 LM	DN 10-65	PN 500	15-20
High pressure globe valve HD 2000 with back seat	200 LS/200 LJ	DN 10-65	PN 500	15-20
High pressure lift check valve HD 2000	240 MT	DN 10-65	PN 500	15-20
Stop check valve HD 2000	240 MM	DN 10-65	PN 500	15-20
High pressure globe valve DVA 25/40	200 BZ	DN 80-250	PD 25/40	21-24
Further standards				25-26
Special globe valve variants				27-28

■ Gate valves

Small gate valve	808 GJ	DN 10-40	PN 10-100	29-32
Small gate valve / VALTRA	800/808 GJ	NPS $1\frac{1}{2}$ - 2 / DN 15-50	Class 800/10-40	33-36
Gate valve	700 HJ/JJ (GA)	DN 50-150	PN 10-100	37-42
Gate valve	700 HJ/JJ (GA)	DN 200-250	PN 10-40	43-46
Gate valve	700 HJ/JJ	DN 200-300	PN 63-100	47-50
Gate valve	400 JJ	DN 350-700	PN 63-100	51-54
Gate valve / VALTRA	700 JJ	DN 300-1000	PN 10-25	55-56
Gate valve / VALTRA	700 JJ	DN 300-700	PN 40	57-58
Gate valve	700 JJ	DN 50-300/250	PN 160/PD 18	59-62
High pressure gate valve DSK 10	700 JT	DN 50-150	PD 10	63-66
High pressure gate valve DSK 10	700 JT	DN 200-350/300	PD 10	67-70
High pressure gate valve DSK 10	700 JT	DN 350-700	PD 10	71-74
High pressure gate valve DSK 26	700 JT	DN 65-300	PD 25/40	75-78
High pressure gate valve DSK 16-63	700 JT	DN 50-600	PD 16-63	79-82
Overpressure-safety-devices / PERSTA Type SV 97, -98, -99				83-84
Gate valve variants				85-86

■ Designation	■ Type	■ Size	■ Rating	■ Page
----------------------	---------------	---------------	-----------------	---------------

■ Swing check valves

Swing check valves	640 AA	DN 50-250	PN 10-40	87-90
Swing check valves/VALTRA	640 AA	DN 300-800	PN 10-40	91-94
Swing check valves	640 AA	DN 50-300/250	PN 63-160 (PD 18)	95-98
High pressure swing check valves DRI 26	640 AB	DN 65-300	PD 25/40	99-102
High pressure swing check valves DRI 16-63	640 AB	DN 50-600	PD 16-63	103-106
High pressure stop check valves DRA 26	640 ST		PD 25/40	107-108
Freewheel swing check valve	640 DJ	DN 50-800	PN 40-250	109
Swing check valves variants				110

■ Line blind valves

Line blind valves DPV 10	990 VW	DN 350-700	PD 10	111-114
Line blind valves DPV 16-63	990 VW	DN 65-600	PD 16-63	115-118

■ Strainer

Strainer	990 ST	DN 10-65	PN 500	119-122
Strainer DSF	990 SZ	DN 80-250	PD 25/40	123-124


■ Technical appendix

Pressure-rate-tables PD 10-63	125
Flange dimensions	126
Design	127-128
Butt welding ends DIN 3239 and 2559	129
Butt welding ends EN 12627	130
Processing and test equipment/test facilities	131
Qualification/approvals	132
Figure number code	133

■ Notice

The values indicated in the operating pressure and temperature tables are the max. admissible operating data for our valves. Before choosing a valve, the plant-specific extent of variations of the pressure and temperature as well as possible emergency conditions have to be considered

- **Globe valves** ▪ **Globe valve** ▪ **200 AE/BE/AJ/BJ** ▪ **PN 10-160** ▪ **DN 10-50**
- **Globe valves** ▪ **Lift check valve** ▪ **240 MT** ▪ **PN 10-160** ▪ **DN 10-50**

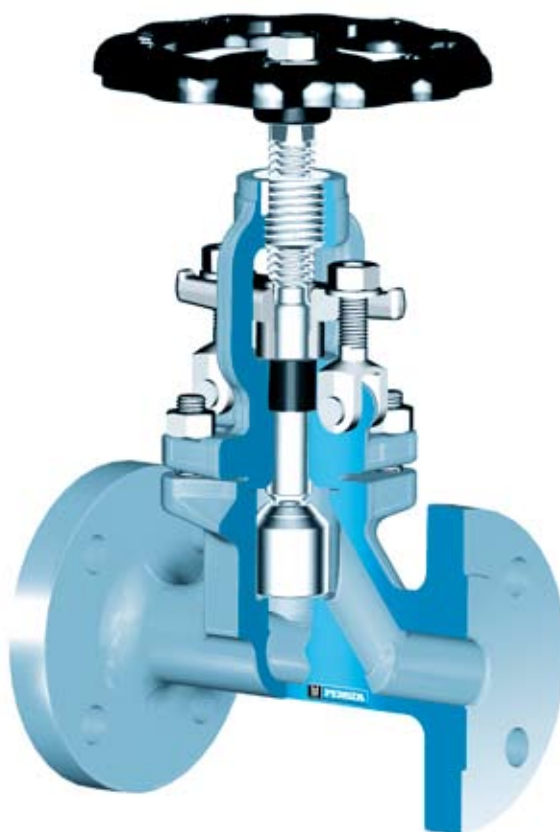

Range of application

Admissible operating pressure [bar] at design temperature [°C] ¹⁾

Material	PN	-200	-60	-10	20	120	150	200	250	300	350	400	450	500	510	520	530	540	550
1.0460	10-40			40	40	40	37	35	32	28	24	21	10						
	63			63	63	63	58	50	45	40	36	32	24						
	100			100	100	100	90	80	70	60	56	50	38						
	160			160	160	160	145	130	112	96	90	80	60						
1.5415 ⁵⁾	10-40			40	40	40	40	40	35	31	30	28	18	14	11	9			
	63			63	63	63	63	63	56	50	47	45	29	22	16	14			
	100			100	100	100	100	100	87	78	74	70	45	34	27	22			
	160			160	160	160	160	160	139	125	118	112	72	55	43	35			
1.7335	10-40			40	40	40	40	40	40	38	36	34	29	24	19	15	12	9	
	63			63	63	63	63	63	63	61	58	56	47	40	32	25	20	15	
	100			100	100	100	100	100	100	95	91	87	74	62	49	38	31	24	
	160			160	160	160	160	160	160	153	146	139	118	100	79	62	46	35	
1.4571	10-40 ²⁾⁽³⁾⁽⁴⁾	40	40	40	40	40	40	40	38	36	34	32	32	32	31	31	31	31	
	63 ²⁾⁽³⁾⁽⁴⁾	63	63	63	63	63	59	56	53	50	48	47							
	100 ²⁾⁽³⁾⁽⁴⁾	100	100	100	100	100	92	88	83	79	76	73							
	160 ²⁾⁽³⁾⁽⁴⁾	160	160	160	160	160	150	142	135	127	123	119							
1.0566	10-40 ⁴⁾⁽⁶⁾	40	40	40	40	37	35	32	28										
	63 ⁴⁾⁽⁶⁾	63	63	63	63	58	50	45	40										
	100 ⁴⁾⁽⁶⁾	100	100	100	100	92	80	70	60										
	160 ⁴⁾⁽⁶⁾	160	160	160	160	147	130	112	96										

1) Operating temperature = design temperature minus temperature surcharge acc. to DIN regulations.

2) Application at more than 400 °C operating temperature only admissible if no intercrystalline corrosion has to be expected.

3) At operating temperature 400 °C the material of the screws is 1.4986.

4) In case of screws A4-70 with > 8 x d screw-length the mechanical strength properties acc. to table 6 of DIN 267 Part 11 have been considered.

5) Butt welding ends

6) At temperature > 50 °C only applicable for short-time service.

■ **Globe valves** ■ **Globe valve** ■ **200 AE/BE/AJ/BJ** ■ **PN 10-160** ■ **DN 10-50**

■ **Globe valves** ■ **Lift check valve** ■ **240 MT** ■ **PN 10-160** ■ **DN 10-50**

Standard features

- Straight body
- Die-forged valve body and bonnet
- Shut-off disc, Fig. No. 200 AE
- Shut-off disc with yoke sleeve, standard features AJ
- Trottle disc with yoke sleeve, standard features BJ
- Trottle disc standard features BE
- Outside screw and yoke
- Position indicator if required
- Turning and rising stem (AE/BE)
- Non-turning, rising stem (AJ/BJ)

Media

Depending on the material the valves are suitable for water, gas, oil and other non aggressive media

Fields of application

Chemical industries, power plants, ship building and other

Pressure and temperature ratings

- Pressure rating BW-Ends up to 160 bar
- Pressure rating FL up to 160 bar
- Temperature rating up to 550 °C

Materials

- 1.0460
- 1.0566
- 1.5415 only with BW-Ends
- 1.7335
- 1.4571

Further materials on request.

Design Highlights


- Die-forged valve body and bonnet
- Seats are hardfaced or welded on
- Body-bonnet connection male and female
- Body and bonnet in two separate pieces with bolted connection

Benefits


- Free from porosity and shrink holes
- Extremely resistant to wear
- Sealing blow out proof
- To ease maintenance work, e.g. regrinding of the body seats

- **Globe valves** ▪ **Globe valve** ▪ **200 AE/BE/AJ/BJ** ▪ **PN 10-160** ▪ **DN 10-50**
- **Globe valves** ▪ **Lift check valve** ▪ **240 MT** ▪ **PN 10-160** ▪ **DN 10-50**


Globe valve AE/BE

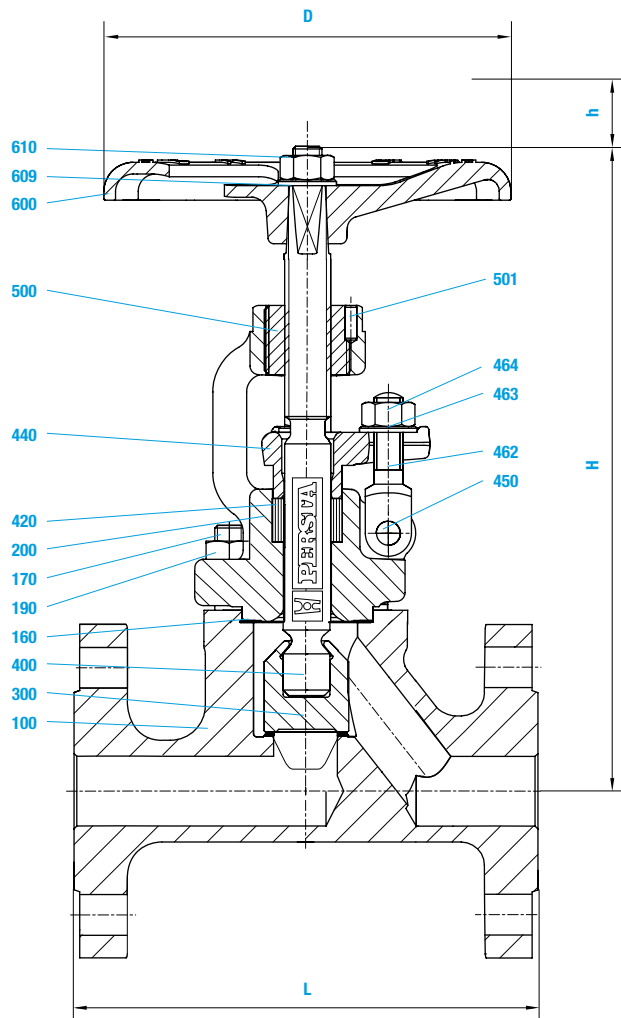


Globe valve AJ/BJ

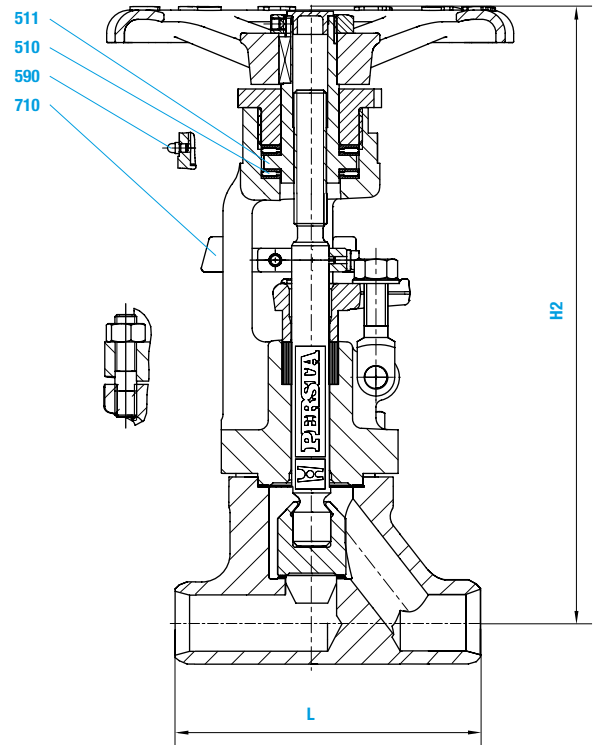

Lift check valve

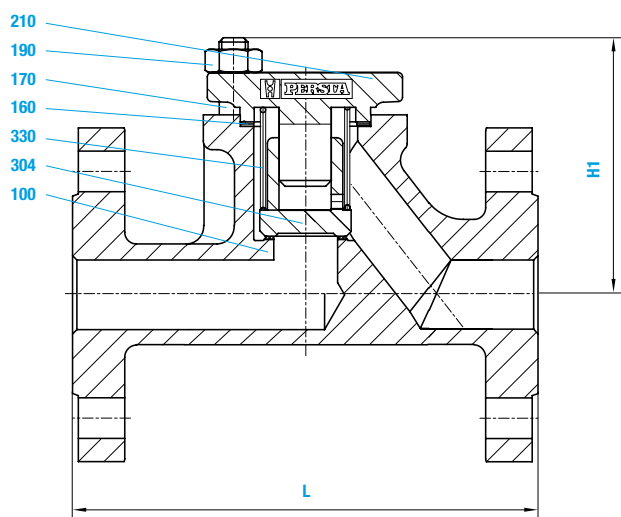

BW-Version

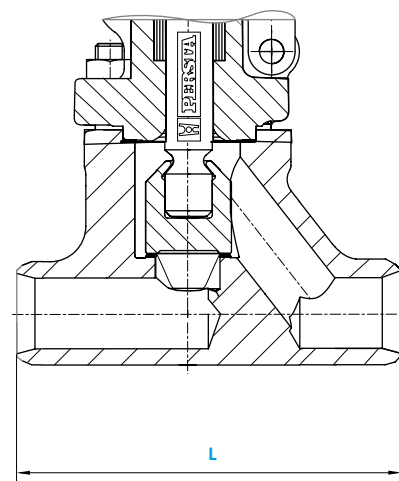

■ **Globe valves** ■ **Globe valve** ■ **200 AE/BE/AJ/BJ** ■ **PN 10-160** ■ **DN 10-50**

■ **Globe valves** ■ **Lift check valve** ■ **240 MT** ■ **PN 10-160** ■ **DN 10-50**

Materials							
Pos.	Component	1.0460 (21)	1.0566 (25)	BW-Version 1.5415 (42)	1.7335 (44)	1.4571 (82)	1.4571 (87)
100	Body	1.0460 ⁴⁽⁸⁾	1.0566 ⁴⁾	1.5415 ⁵⁾	1.7335 ⁵⁾	1.4571 ⁷⁾	1.4571 ⁷⁾
160	▶ Gasket	Graphite	Graphite	Graphite	Graphite	Teflon	Graphite
170	Stud ¹⁾	1.1181	A4-70	1.7709	1.7709	A4-70	A4-70
170	Stud ²⁾	1.7709	A4-70	1.4923	1.4923	A4-70	A4-70
190	Hexagonal nut ¹⁾	1.1181	A4-70	1.7218	1.7218	A4-70	A4-70
190	Hexagonal nut ²⁾	1.7218	A4-70	1.7218	1.7218	A4-70	A4-70
200	Bonnet	1.0460	1.0566	1.7335	1.7335	1.4571	1.4571
210	Bonnet	1.0460	1.0566	1.7335	1.7335	1.4571	1.4571
300	▶ Disc	1.4021 ³⁾	1.0566 ⁴⁾	1.7335 ⁵⁾	1.7335 ⁵⁾	1.4571 ⁶⁾	1.4571 ⁶⁾
304	▶ Disc	1.4021 ³⁾	1.4571 ⁶⁾	1.4571 ⁵⁾	1.4571 ⁵⁾	1.4571 ⁶⁾	1.4571 ⁶⁾
330	▶ Spring	1.4310	1.4310	1.4310	1.4310	1.4571	1.4571
400	▶ Stem	1.4021	1.4571	1.4021	1.4021	1.4571	1.4571
420	▶ Packing	Graphite	Graphite	Graphite	Graphite	Teflon	Graphite
440	Gland flange	1.0460	1.4571	1.0460	1.0460	1.4571	1.4571
450	Rivet	1.1181	A4-50	1.1181	1.1181	A4-50	A4-50
462	Gland bolt	1.1181	1.4571	1.1181	1.1181	1.4571	1.4571
463	Washer	St	A4-50	St	St	A4-50	A4-50
464	Hexagonal nut	1.1181	A4-70	1.1181	1.1181	A4-70	A4-70
500	▶ Stem nut	1.0718	1.0718	1.0718	1.0718	1.0718	1.0718
501	▶ Cylindrical pin	St	St	St	St	St	St
510	▶ Yoke sleeve	1.0718	1.0718	1.0718	1.0718	1.0718	1.0718
511	▶ Needle bearing	WLS	WLS	WLS	WLS	WLS	WLS
590	Grease nipple	5.8	5.8	5.8	5.8	5.8	5.8
600	Handwheel	5.3106	5.3106	5.3106	5.3106	5.3106	5.3106
609	Washer	St	St	St	St	A4-50	A4-50
610	Hexagonal nut	1.1181	1.1181	1.1181	1.1181	A4-70	A4-70
710	Anti-rotation device	5.3106	5.3106	5.3106	5.3106	5.3106	5.3106

▶ Spare parts
Special materials on request; alterations reserved.

1) PN 10-40
2) PN 63-160
3) Seat hard faced
4) Seat hard faced with Cr17
5) Seat hard faced with Stellite
6) ≥ PN 63 seat hard faced with Stellite
7) ≥ PN 63 seat hard faced with hastelloy
8) DN 50 PN 10-160 Flange Version with 1.0619 hard faced with Cr17

Dimensions/mm									
PN	DN	FL L	BW L	H	H1	H2	Stroke h	D	1.0619 H
10-40	10	130	130	215	85	275	12	140	
	15	130	130	215	85	275	12	140	
	20	150	130	220	90	275	12	140	
	25	160	130	220	90	275	12	140	
	32	180	160	245	115	305	15	180	
	40	200	180	250	130	305	15	180	
63-160	50	230	210	260	120	345	18	180	
	10	210	150	220	100	275	12	180	
	15	210	150	220	100	275	12	180	
	20	230	150	220	100	275	12	180	
	25	230	160	220	100	275	12	180	
	32	260	180	285	140	335	15	225	
63-100	40	260	210	285	140	335	15	225	
	50	300	250	285	150	345	18	150	260
160	50	300	250	285	150	345	18	225	260

The valves are also available in angle pattern up DN 100.

Weights/kg					
PN	DN	200 AE/BE		240 MT	
		FL	BW	FL	BW
10-40	10	4,5	3,8	3,2	2,4
	15	5,0	4,2	3,2	2,4
	20	5,7	3,8	3,9	2,4
	25	6,3	4,0	4,7	2,3
	32	10,0	7,3	7,9	5,5
	40	11,2	7,3	9,1	5,5
63-160	50	15,5	11,0	12,1	7,9
	10	8,7	5,9	6,0	4,0
	15	8,6	6,2	6,8	4,0
	20	10,4	5,5	9,0	4,0
	25	10,9	5,8	9,2	4,0
	32	19,0	13,2	15,6	9,0
63-100	40	21,0	12,8	16,8	9,0
	50	24,1	15,0	19,5	11,0
160	50	25,0	15,0	22,0	11,0

Kvs-values (m3/h)														
Line	PN 10-40							PN 63-160						
	DN 10	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 10	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50
200 AE (BW)	3,0	4,5	6,2	8,6	16,0	21,0	30,0	3,0	4,5	6,2	8,6	16,0	21,0	30,0
200 AE (FL)	1,8	3,0	5,3	8,6	13,0	21,0	37,2	1,8	4,5	5,3	8,6	13,0	21,0	37,2
200 BE (BW)	2,8	4,2	5,9	7,6	14,5	19,5	26,9	2,8	4,2	5,9	7,6	14,5	19,5	26,9
200 BE (FL)	1,5	2,8	4,9	7,6	11,2	19,5	34,5	2,8	4,2	5,9	7,6	14,5	19,5	34,5
240 MT (BW)	2,7	4,1	5,7	7,9	14,6	19,2	34,0	2,7	4,1	5,7	7,9	14,6	19,2	34,0
240 MT (FL)	1,7	2,7	5,7	7,9	11,9	19,2	25,8	1,7	2,7	5,7	7,9	11,9	19,2	25,8

- **Globe valves** ▪ **Globe valve** ▪ **200 AE/BE/AJ/BJ** ▪ **PN 10-160** ▪ **DN 65-200**
- **Globe valves** ▪ **Lift check valve** ▪ **240 MT** ▪ **PN 10-160** ▪ **DN 65-200**



Range of application

Admissible operating pressure [bar] at design temperature [°C] ¹⁾

Material	PN	-200	-50	-10	20	100	120	150	200	250	300	350	400	425	450	475	500	510	520	530	540	550
1.0619	10-16			16	16	16	16	15	14	13	11	10	8									
	25			25	25	25	25	23	22	20	17	16	13									
	40			40	40	40	40	37	35	32	28	24	21									
	63			63	63	63	63	53	50	45	40	36	32									
	100			100	100	100	100	83	80	70	60	56	50									
	160 ³⁾			160	160	160	160	135	130	112	96	90	80									
1.5419	10			10	10	9	9	9	8	7	7	7	6	6	6	6	3	3	2	2		
	25			25	25	23	23	22	20	19	17	16	16	16	15	15	9	7	6	4		
	40			40	40	36	36	35	31	29	27	26	25	24	24	23	14	11	9	7		
	63			63	63	59	59	58	51	48	45	42	41	40	39	38	22	18	14	12		
	100			100	100	92	92	90	80	74	69	65	63	62	61	59	35	28	22	18		
	160 ³⁾			160	160	148	148	143	128	119	111	104	101	100	98	94	55	44	35	29		
1.7221	10-16 ²⁾			16	16	16	16	15,1	15	14	13	11										
	25 ²⁾			25	25	25	25	23,6	23	22	20	17										
	40 ²⁾			40	40	40	40	37,7	37	35	32	28										
	63 ²⁾			63	63	63	63	55	54	53	50	45	40									
	100 ²⁾			100	100	100	100	87	84	83	80	70	60									
	160 ²⁾			160	160	160	160	140	136	135	130	112	96									
1.7357	10-16			16	16	16	16	15	14	13	11	10	8									
	25			25	25	25	25	25	25	25	25	24	23	22	21	20	18	15	12	9		
	40			40	40	40	40	40	40	40	40	38	36	35	34	33	29	24	19	15		
	63			63	63	63	63	63	63	63	63	61	58	57	56	51	47	40	32	25		
	100 ⁴⁾			100	100	100	100	100	100	100	100	95	91	89	87	80	74	62	49	38		
1.4308	10-16	16	16	16	16	13	12,6	12	11	8	8											
	25	25	25	25	25	21	19,8	18	17	13	12											
	40	40	40	40	40	34	32,4	30	24	21	20											
1.4581	10-16	16	16	16	15	14,6	14	13	13	12	12	11	10	8	7,5	7	7	7	7	7	6,5	
	25	25	25	25	24	23,2	22	21	20	19	18	17	16	13	12,5	12	11	11	11	11	11	
	40	40	40	40	38	36,8	35	33	32	30	28	26	24	21	20	19	19	19	19	18	18	

1) Operating temperature = design temperature minus temperature surcharge acc. to DIN regulations.

2) At temperature > 50 °C only applicable for short-time service.

3) PN 160 is only valid for DN 65-100.

4) Only for globe valves DN 65-80; for lift check valves DN 65-125.

Permissible differential pressure (pressure inlet below the disc) acc. to EN 13709.

- **Globe valves** ▪ **Globe valve** ▪ **200 AE/BE/AJ/BJ** ▪ **PN 10-160** ▪ **DN 65-200**
- **Globe valves** ▪ **Lift check valve** ▪ **240 MT** ▪ **PN 10-160** ▪ **DN 65-200**

Standard features

- Straight bonnet
- Cast steel body and bonnet
- Shut-off disc, Fig. No. AE
- Shut-off disc with yoke sleeve standard features AJ
- Throttle disc with yoke sleeve standard features BJ
- Throttle disc, Fig. No. 200 BE
- Outside screw and yoke
- Position indicator if required
- Turning and rising stem (AE/BE)
- Non-turning, rising stem (AJ/BJ)

Media

Depending on the material the valves are suitable for water, gas, oil and other non aggressive media

Fields of application

Chemical industries, power plant, ship building and other

Pressure and temperature ratings

- Pressure rating BW-Ends up to 160 bar
- Pressure rating FL up to 160 bar
- Temperature rating up to 550 °C

Materials

- 1.0619
- 1.5419
- 1.7221
- 1.7357
- 1.4581
- 1.4308

Further materials on request.

Design Highlights


- Seats are welded on
- Body-bonnet connection male and female
- Body and bonnet in two pieces with bolted connection

Benefits


- Extremely resistant to wear
- Sealing blow out proof
- To ease maintenance work, e.g. regrinding

- **Globe valves** ▪ **Globe valve** ▪ **200 AE/BE/AJ/BJ** ▪ **PN 10-160** ▪ **DN 65-200**
- **Globe valves** ▪ **Lift check valve** ▪ **240 MT** ▪ **PN 10-160** ▪ **DN 65-200**


Globe valve AE/BE

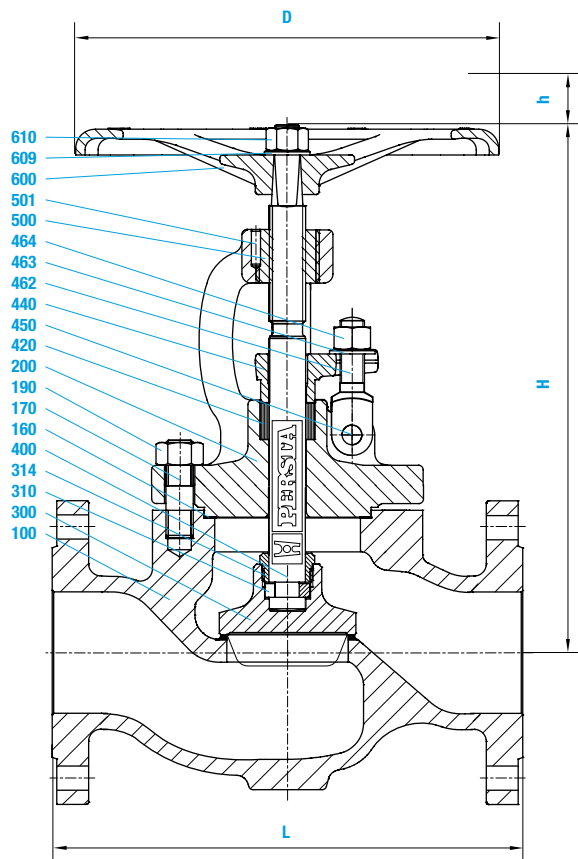


Globe valve AJ/BJ

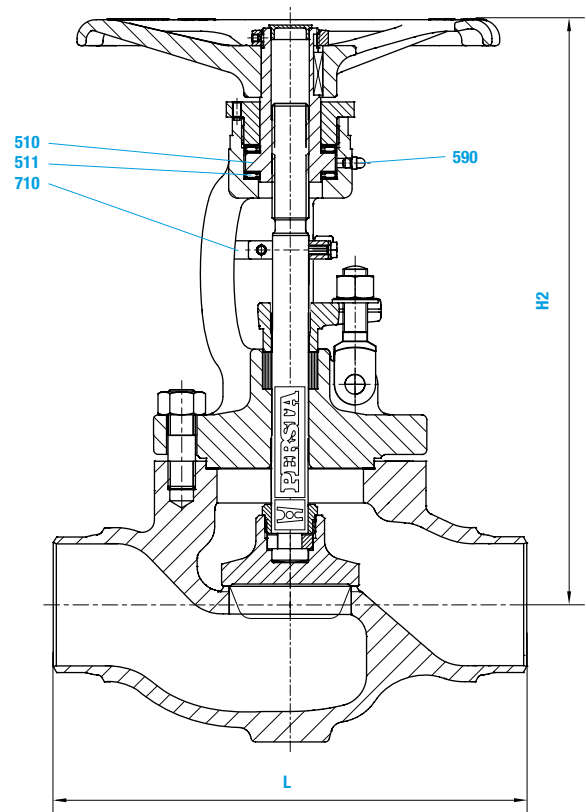

Lift check valve

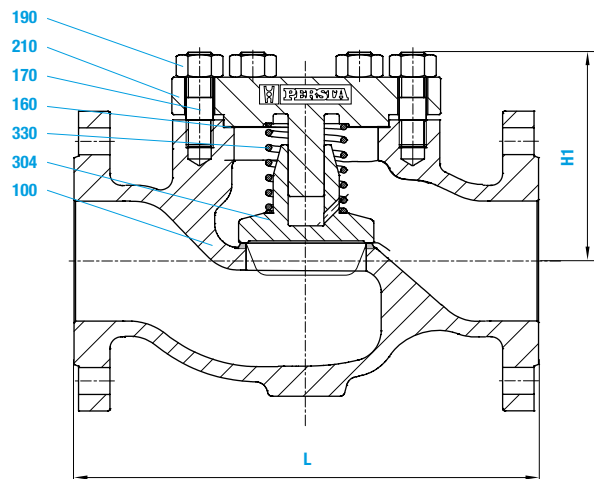

BW-Version

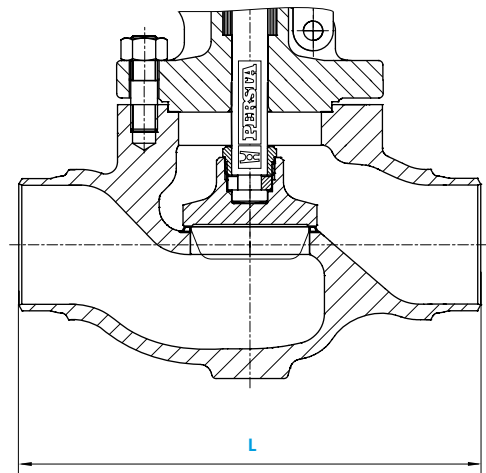

■ **Globe valves** ■ **Globe valve** ■ **200 AE/BE/AJ/BJ** ■ **PN 10-160** ■ **DN 65-200**

■ **Globe valves** ■ **Lift check valve** ■ **240 MT** ■ **PN 10-160** ■ **DN 65-200**

Materials							
Pos.	Component	1.0619 (11)	1.5419 (32)	1.7221 (31)	1.7357 (34)	1.4581 (72)	1.4308 (77)
100	Body	1.0619 ⁴⁾	1.5419 ⁵⁾	1.7221	1.7357 ⁵⁾	1.4581 ⁹⁾	1.4308 ⁹⁾
160	▶ Gasket	Graphite	Graphite	Graphite	Graphite	Teflon	Graphite
170	Stud ¹⁾	1.1181	1.7709	A4-70	1.7709	A4-70	A4-70
170	Stud ²⁾	1.7709	1.4923	A4-70	1.4923		
190	Hexagonal nut ¹⁾	1.1181	1.7218	A4-70	1.7218	A4-70	A4-70
190	Hexagonal nut ²⁾	1.7218	1.7218	A4-70	1.7218		
200	Bonnet	1.0619	1.7357	1.7221	1.7357	1.4581	1.4308
210	Cover	1.0460	1.7335	1.0566	1.7335	1.4571	1.4571
300	▶ Disc	1.4021 ³⁾	1.7335 ⁵⁾	1.0566 ⁴⁾	1.7335 ⁵⁾	1.4571 ⁸⁾	1.4571 ⁸⁾
304	▶ Disc	1.0460 ³⁾	1.7335 ⁵⁾	1.0566 ⁴⁾	1.7335 ⁵⁾	1.4571 ⁸⁾	1.4571 ⁸⁾
310	▶ Filling piece	1.0035	1.0035	1.0035	1.0035	1.4571	1.4571
314	▶ Disc nut	1.0050	1.0050	1.0050	1.0050	1.4571	1.4571
330	▶ Spring	1.4310	1.4310	1.4310	1.4310	1.4571	1.4571
400	▶ Stem	1.4021	1.4021	1.4571	1.4021	1.4571	1.4571
420	▶ Packing	Graphite	Graphite	Graphite	Graphite	Teflon	Graphite
440	Gland flange	1.0460	1.0460	1.4571	1.0460	1.4571	1.4571
450	Rivet	1.1181	1.1181	A4-50	1.1181	A4-50	A4-50
462	Gland bolt	1.1181	1.1181	1.4571	1.1181	1.4571	1.4571
463	Washer	St	St	A4-50	St	A4-50	A4-50
464	Hexagonal nut	1.1181	1.1181	A4-70	1.1181	A4-70	A4-70
500	▶ Stem nut	1.0718	1.0718	1.0718	1.0718	1.0718	1.0718
501	▶ Cylindrical pin	St	St	St	St	St	St
510	▶ Yoke sleeve	1.0718	1.0718	1.0718	1.0718	1.0718	1.0718
511	▶ Bearing	WLS	WLS	WLS	WLS	WLS	WLS
590	Grease nipple	5.8	5.8	5.8	5.8	5.8	5.8
600	Handwheel	5.3106	5.3106	5.3106	5.3106	5.3106	5.3106
600	Handwheel	5.3106	5.3106	5.3106	5.3106	5.3106	5.3106
609	Washer	St	St	St	St	A4-50	A4-50
610	Hexagonal nut	1.1181	1.1181	1.1181	1.1181	A4-70	A4-70
710	Anti-rotation device	5.3106	5.3106	5.3106	5.3106	5.3106	5.3106

▶ Spare parts Special materials on request; alterations reserved.

1) PN 10-40
2) PN 63-160
3) Seat hard faced ≥ DN 125, 1.0460 seat hard faced with Cr17

4) Seat hard faced with Cr17
5) Seat hard faced with stellite
8) ≥ PN 63 seat hard faced with stellite

9) ≥ PN 63 seat hard faced with hastelloy

Dimensions/mm								
PN	DN	FL L	BW L	Stroke h	H1	D	H2	
10-40	65	290	290	310	22	105	225	330
	80	310	310	360	25	115	280	390
	100	350	350	400	30	140	280	400
	125	400	400	465	40	145	360	495
	150	480	480	530	50	170	360	530
	200	600	600	575	65	240	450	575
63-160	65	340	340	360	22	120	280	360
	80	380	380	400	25	145	280	400
	100	430	430	410	30	165	360	410
63	125	500	500	535	40	210	360	535
	150	550	550	555	50	235	450	555
100	125	500	500	535	40	210	360	535
	150	550	550	555	50	235	450	555

Weights/kg									
DN	200 AE / BE								
	PN 10-16 FL	PN 25-40 FL	PN 10-40 BW	PN 63 FL	PN 63 BW	PN 100 FL	PN 100 BW	PN 160 FL	PN 160 BW
65	27,5	27,5	16,0	34,0	24,0	34,0	24,0	39,0	24,0
80	37,0	37,0	28,0	47,0	36,0	47,0	36,0	51,0	36,0
100	52,0	53,0	41,0	72,0	56,0	72,0	56,0	80,0	56,0
125	69,0	69,0	55,0	117,0	93,0	120,0	93,0		
150	103,0	110,5	97,0	160,0	125,0	166,0	125,0		
200	171,0	175,0	156,0						
DN	240 MT								
	PN 10-16 FL	PN 25-40 FL	PN 10-40 BW	PN 63 FL	PN 63 BW	PN 100 FL	PN 100 BW	PN 160 FL	PN 160 BW
65	18,5	18,5	11,5	29,0	13,0	29,0	13,0	33,0	13,0
80	29,6	29,6	20,4	42,0	23,0	42,0	23,0	46,0	23,0
100	35,4	35,4	29,0	63,0	38,0	63,0	38,0	71,0	38,0
125	58,0	58,0	40,0	101,0	78,0	106,0	78,0		
150	80,0	80,0	65,0	145,0	110,0	150,0	110,0		
200	145,0	160,0	148,0						



Kvs-values (m3/h) BW- and FL-version							
Line	DN 65 PN 10-160	DN 80 PN 10-160	DN 100 PN 10-160	DN 125 PN 10-160	DN 150 PN 10-160	DN 200 PN 10-40	
200 AE / AJ	71,0	122,0	162,0	260,0	370,0	660,0	
200 BE / BJ	61,5	78,0	104,0	171,0	250,0	422,0	
240 MT	72,1	105,9	171,6	263,0	374,0	688,0	

The valves are also available in angle pattern up to DN 100 nominal sizes > DN 200 on request.

Permissible differential pressure (pressure inlet below the disc) acc. to EN 13709.

DN bar 65 80 100 125 150 200
110 70 44 33 21 14

- **Globe valves** ▪ VALTRA Bellow seal globe valve ▪ 200 AL ▪ PN 10-160 ▪ DN 15-50
- **Globe valves** ▪ VALTRA Bellow seal globe valve ▪ 200 AL ▪ PN 10-40 (63-160) ▪ DN 65-400 (DN 65-200)

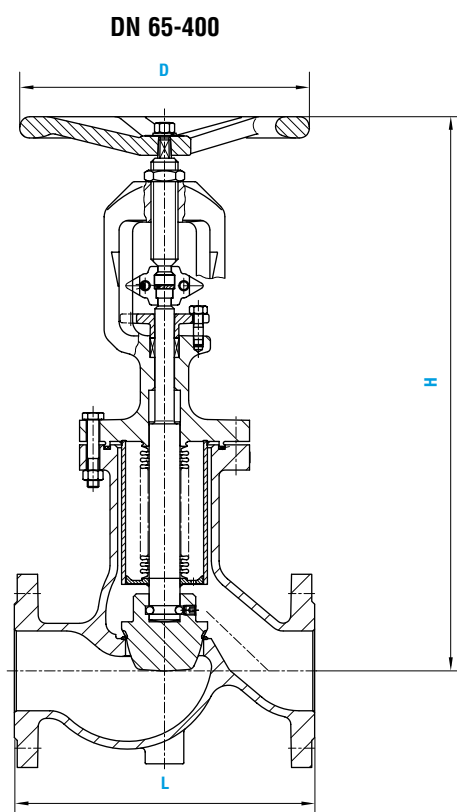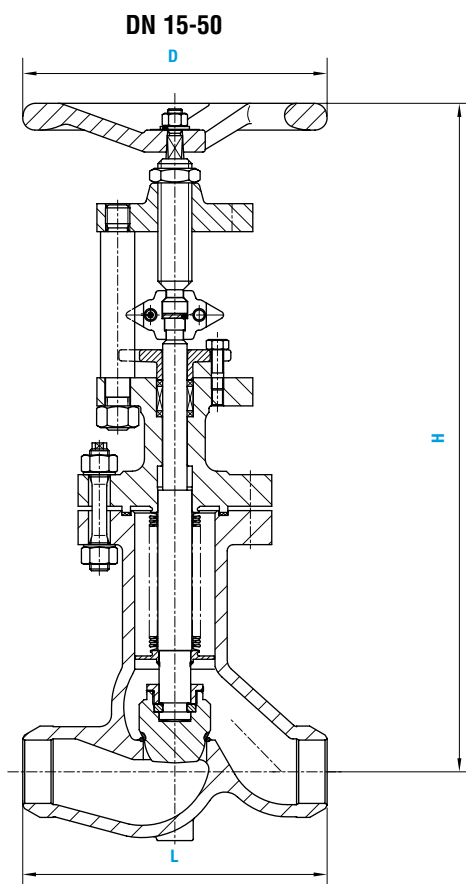

- **Globe valves** ■ VALTRA Bellow seal globe valve ■ 200 AL ■ PN 10-160 ■ DN 15-50
- **Globe valves** ■ VALTRA Bellow seal globe valve ■ 200 AL ■ PN 10-40 (63-160) ■ DN 65-400 (DN 65-200)

Materials				
	Component	1.0619	1.4408	1.1138
	Body	1.0619	1.4408	1.1138
	welded on with	1.4370 ¹⁾	Stellite	1.4370 ¹⁾
	Bonnet	1.0619	1.4408 / 1.4571	1.1138 / 1.0566
	Disc	1.4021 ²⁾	1.4571	1.4571 / 1.0566
	welded on with	1.4021 ¹⁾	Stellite	Stellite
	Bellow seal	1.4571	1.4571	1.4571
	Gasket	1.4571 Graphite layer		
	Bolt	A2-70 ³⁾	A2-70 ⁵⁾	A2-70 ⁵⁾
	Hexagonal nut	A2-70 ⁴⁾	A2-70 ⁵⁾	A2-70 ⁵⁾
	Stuffing box	Pure graphite		
	Gland flange	1.4408 ⁶⁾	1.4408	1.4408
	Stern upper part	1.4122	1.4122	1.4122
	Stern lower part	1.4571	1.4571	1.4571
	Handwheel	0.6020	0.6020	0.6020

¹⁾ ≥ PN 63 Stellite
²⁾ ≥ PN 63 1.4571
³⁾ ≥ PN 63 1.7709
⁴⁾ ≥ PN 63 1.7218
⁵⁾ ≥ PN 63 A4-70
⁶⁾ ≥ DN 65 1.0420

Dimensions/mm					
PN	DN	FL L	BW L	H/open	D
40	15	130	130	290	150
	20	150	130	290	150
	25	160	130	300	150
	32	180	160	335	175
	40	200	180	340	175
	50	230	210	360	200
	65	290	290	460	200
	80	310	310	610	250
	100	350	350	610	300
	125	400	400	615	300
	150	480	480	645	400
	200	600	600	910	400
	250	730	730	1280	600
	300	850	850	1285	600
	350	980	980	1675	600
	400	1100	1100	1685	600
63	15	210	210	300	150
	20	230	230	300	150
	25	230	230	300	150
	32	260	260	335	175
	40	260	260	340	175
	50	300	300	360	200
	65	340	340	460	200
	80	380	380	610	300
	100	430	430	610	300
	125	500	500	615	300
	150	550	550	945	400
	200	650	650	910	400
100-160	15	210	210	375	175
	20	230	230	375	175
	25	230	230	375	175
	32	260	260	410	250
	40	260	260	410	250
	50	300	300	560	250
	65	340	340		
	80	380	380	880	400
	100	430	430	880	400
	125	500	500	890	400
100	150	550	550	1080	400
	200	650	650	1045	400
160	150	550	550	1140	400
	200	650	650	1140	400

Weights/kg			
PN	DN	FL	BW
40	15	7	6
	20	8	7
	25	8	7
	32	12	10
	40	14	11
	50	17	13
	65	26	18
	80	40	30
	100	56	38
	125	86	72
	150	155	130
	200	255	215
	250	393	325
	300	492	444
	350	800	720
	400	1020	890

■ **Globe valves** ■ **High pressure globe valve HD 91** ■ **200 JM** ■ **PN 320** ■ **DN 10-65/50**



Range of application

Admissible operating pressure [bar] at design temperature [°C] ¹⁾

Material	PN	-10	20	50	100	120	150	200	250	300	350	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580 ²⁾	590 ²⁾	600 ²⁾
1.0460	160	160	160	160	160	160	160	151	132	118	99	80	76	73	69	65	61	54	45	37												
	250	250	250	250	250	250	250	235	206	184	155	125	119	113	107	102	96	85	71	58												
	320	320	320	320	320	320	320	302	264	236	198	160	153	145	138	130	123	109	91	75												
1.5415	160	192	192	192	192	192	192	179	165	141	137	132	131	130	129	128	127	126	125	124	109	85	64	51	41							
	250	300	300	300	300	300	300	280	258	221	213	206	205	203	202	200	199	197	196	194	170	132	101	79	64							
	320	320	320	320	320	320	320	320	283	273	264	262	260	258	256	255	253	251	249	217	170	129	102	81								
1.7335	160	192	192	192	192	192	192	189	174	165	156	154	152	150	148	146	145	144	143	142	129	109	86	70	57	44	36	29				
	250	300	300	300	300	300	300	294	272	258	243	240	237	234	231	228	227	225	224	222	202	170	134	109	88	69	57	46				
	320	320	320	320	320	320	320	320	294	272	258	243	240	237	234	231	228	227	225	224	222	202	170	134	109	88	69	57	46			
1.7383 2)	160	192	192	192	192	192	192	192	189	174	165	163	161	159	157	156	154	152	150	143	127	111	97	85	74	64	55	48	41	36	32	
	250	300	300	300	300	300	300	300	294	272	258	255	252	249	246	243	240	237	234	224	199	174	152	132	115	100	85	75	65	56	49	
	320	320	320	320	320	320	320	320	320	292	270	260	320	320	319	315	311	307	304	300	287	255	223	194	170	147	128	109	96	83	72	63

1) Operating temperature = design temperature minus temperature surcharge acc. to DIN regulations.

2) For temperatures > 570 °C, stem in 1.4923 and high-temperature-packing.

■ **Globe valves** ■ High pressure globe valve HD 91 ■ 200 JM ■ PN 320 ■ DN 10-65/50

Standard features

- Disc and stem in one piece
- Die-forged valve body
- Non-turning, rising stem
- Position indicator
- Throttle disc
- Yoke sleeve supported by needle bearings
- Possibility to add an actuator-flange

Pressure and temperature ratings

- Pressure rating 320 bar
- Temperature rating from -10 °C up to 600 °C

Materials

- 1.0460
- 1.5415
- 1.7335
- 1.7383

Further materials on request.

Media

Depending on the material the globe valves are suitable for water, gas, oil and other non aggressive media

Fields of application

High temperature steam and water, refining (catalytic reformers and hydrocrackers), petrochemical and chemical industries, power plants


Design Highlights

- Body seat: edge seat welded on integrately with stellite
- Disc / stem single piece of material > 570 °C with stellited edge seat
- Sealing to the outside only means of the gland packing
- Body and bonnet in two separate pieces with bolted connection
- Yoke sleeve supported by needle bearings (axial type)
- Possibility to add an actuator-flange

Benefits

- No pressed in or screwed seat ring, therefore no crevice corrosion or loosening
- No damages between disc and stem because of high flow velocity
- No bonnet gaskets, therefore reduction of possible leakage areas
- To ease maintenance work, e.g. regrinding of the body seats
- To minimize the expenditure of effort when operating valve
- Simple retrofitting of an electric actuator possible

■ **Globe valves** ■ High pressure globe valve HD 91 ■ 200 JM ■ PN 320 ■ DN 10-65/50

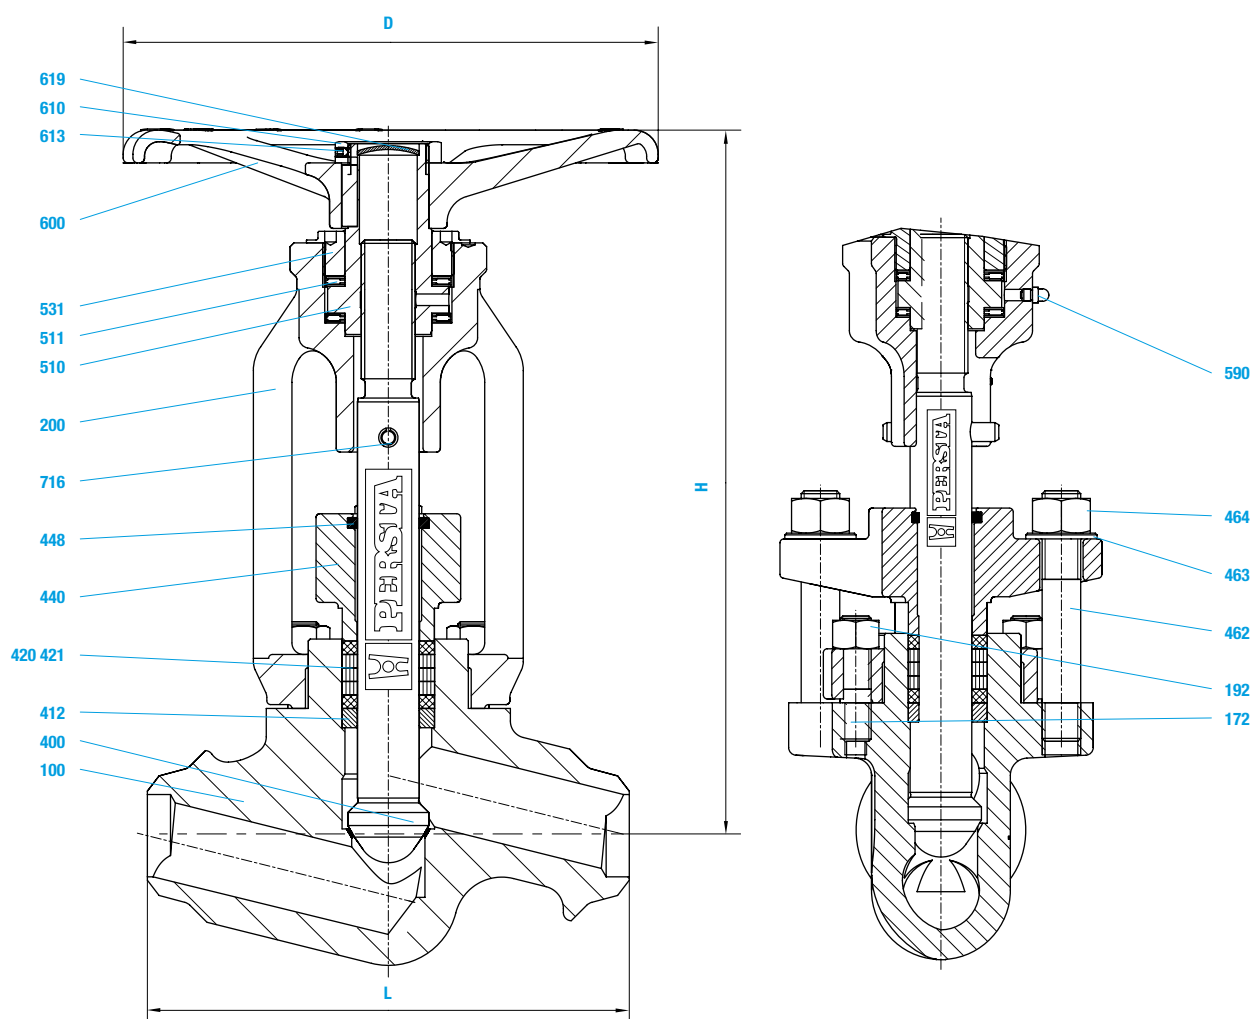

■ **Globe valves** ■ **High pressure globe valve HD 91** ■ **200 JM** ■ **PN 320** ■ **DN 10-65/50**

Materials					
Pos.	Component	1.0460 (21)	1.5415 (42)	1.7335 (44)	1.7383 (45)
100	Body welded on with	1.0460	1.5415	1.7335	1.7383
172	Stud	Stellite	Stellite	Stellite	Stellite
192	Hexagonal nut	1.7709	1.7709	1.7709	1.7709
200	Bonnet	1.7218	1.7218	1.7218	1.7218
400	Stem	1.7379	1.7379	1.7379	1.7379
412	Guide sleeve	1.4122 ¹⁾	1.4122 ¹⁾	1.4122 ¹⁾	1.4122 ¹⁾²⁾
420 / 421	Packing	0.7660	0.7660	0.7660	0.7660
440	Gland flange	Pure graphite	Pure graphite	Pure graphite	Pure graphite ²⁾
448	Dirt scraper	1.7379	1.7379	1.7379	1.7379
462	Stud	Graphite plait	Graphite plait	Graphite plait	Graphite plait
463	Washer	1.7709	1.7709	1.7709	1.7709
464	Hexagonal nut	St	St	St	St
510	Yoke sleeve	1.7218	1.7218	1.7218	1.7218
511	Bearing	CW 713 R	CW 713 R	CW 713 R	CW 713 R
531	Screwing	WLS	WLS	WLS	WLS
590	Grease nipple	1.0460	1.0460	1.0460	1.0460
600	Handwheel	5.8	5.8	5.8	5.8
610	Hexagonal nut	5.3106	5.3106	5.3106	5.3106
613	Screw pin	St	St	St	St
619	Lock washer	45H	45H	45H	45H
716	Tension pin	ST	ST	ST	ST
	Spare parts	1.0904	1.0904	1.0904	1.0904

1) On request stem in 1.4923 with stellited seats
2) For temperatures > 570 °C stem with stellited seats in 1.4923 and hightemperature-packing

Dimensions/mm					
DN	L	H	Stroke	R/Stroke	DIN/ISO D 5210
10	150	208	10	5	140 F07/F10
15	150	208	10	5	140 F07/F10
20	160	250	16	8	180 F10
25	160	250	16	8	180 F10
32	250	415	27	9	280 F10/F14
40	250	415	27	9	280 F10/F14
50	250	415	27	9	280 F10/F14
65 / 50	250	415	27	9	280 F10/F14

Attention: In case of welding connections the permissible operating overpressure is valid for the corresponding tube dimension.

Weights/kg and Kvs-values		
DN	BW	Kvs (m ³ /h)
10	4	2,3
15	4	3,4
20	6,9	6,2
25	6,9	7,9
32	23	20,0
40	23	24,1
50	23	28,3
65 / 50	23	28,3

- **Globe valves** ▪ High pressure globe valve HD 2000 ▪ 200 LM ▪ PN 500 ▪ DN 10-65
- **Globe valves** ▪ Lift check valve HD 2000 ▪ 240 MT ▪ PN 500 ▪ DN 10-65



Range of application

Admissible operating pressure [bar] at design temperature [°C] ¹⁾																																					
Material	PN	20	50	100	120	150	200	250	300	350	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580 ²⁾	590 ²⁾	600 ²⁾	610 ²⁾	620 ²⁾	630 ²⁾	640 ²⁾	650 ²⁾	
1.0460	500	550	550	550	550	550	550	518	463	389	315	300	285	270	255	240	213	177	146																		
1.5415	500	550	550	550	550	550	550	550	550	537	518	514	510	507	503	500	496	493	489	426	333	253	200	160													
1.7335	500	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	500	426	338	275	222	173	142	116									
1.7383 ²⁾	500	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	500	437	381	333	289	252	214	189	163	140	124						
1.4903 ²⁾	500	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	500	465	430	380	338	298	261	231	198	172	
1.4901 ²⁾	500	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550	526	470	419	370	322	278	241	207	
1.4550	500	550	550	550	550	550	550	544	504	481	463	460	456	454	451	449	447	445	443	442	441	440	439	438	437	437	436	435	434	433	396	363	320	271	240	207	

1) Operating temperature = design temperature minus temperature surcharge acc. to DIN regulations.

2) For temperatures > 570 °C, stem in 1.4980 and hightemperature-packing.

- **Globe valves** ▪ High pressure globe valve HD 2000 ▪ 200 LM ▪ PN 500 ▪ DN 10-65
- **Globe valves** ▪ Lift check valve HD 2000 ▪ 240 MT ▪ PN 500 ▪ DN 10-65

Standard features

- Disc and stem in one piece
- Die-forged valve body
- Non-turning, rising stem
- Position indicator / Anti-rotation device
- Throttle disc
- Yoke sleeve supported by needle bearings
- Greater than DN 20 with integral actuator flange
- Back seat type available (200 LS / 200 LJ)
- All HD 2000 valves also available in angle pattern (e.g. 202 LM)

Media

Depending on the material the valves are suitable for water, gas, oil and other non aggressive media

Fields of application

High temperature steam and water, refining (catalytic reformers and hydrocrackers, petrochemical and chemical industries

Pressure and temperature ratings

- Pressure rating up to 550 bar
- Temperature rating from -10 °C up to 650 °C (depending on selected material)

Materials

- 1.0460
- 1.4550
- 1.4901
- 1.4903
- 1.5415
- 1.7335
- 1.7383 Further materials on request.

Design Highlights


- Body seat: tapered seat welded on integrally with stellite
- Disc and stem in one piece; up from 570 °C with stellite tapered seat
- Sealing to the outside only by means of the gland packing
- Body and bonnet in two separate pieces with bolted connection
- Yoke sleeve made of bronze
- Cup springs above the upper needle bearing

Benefits

- No pressed in or screwed seat ring, therefore no crevice corrosion or loosening
- Damage between disc and stem due to high flowrates is prevented
- No bonnet gasket, therefore reduction of possible leakage areas
- To ease maintenance work, e.g. regrinding of the body seats
- Good emergency running properties
- To maintain the necessary closing forces when dimensions change between stem and yoke arms due to thermal fluctuation


■ **Globe valves** ■ High pressure globe valve HD 2000 ■ 200 LM ■ PN 500 ■ DN 10-65

200 LM Shut-off globe valve

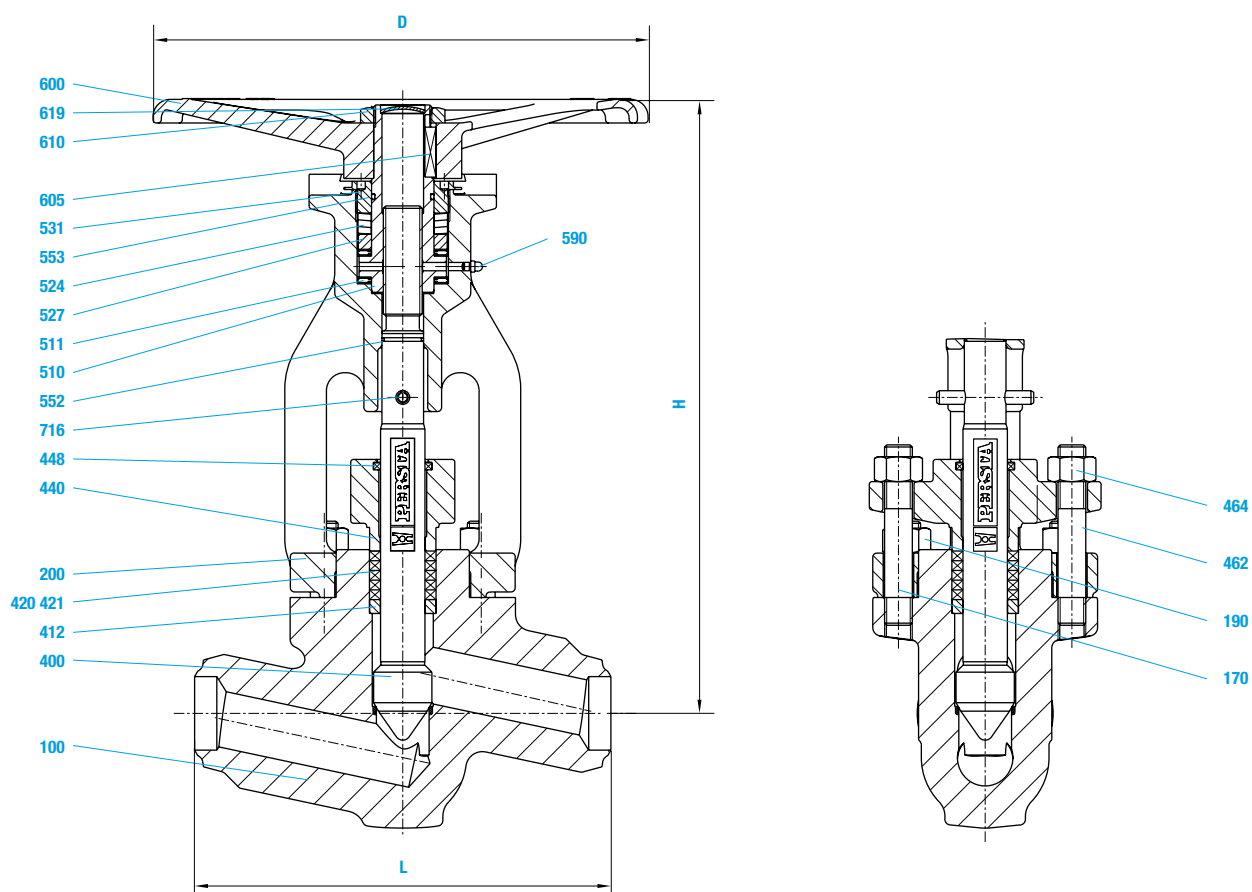


- **Globe valves** ■ High pressure globe valve HD 2000 ■ 202 LM ■ PN 500 ■ DN 10-65

202 LM Shut-off globe valve

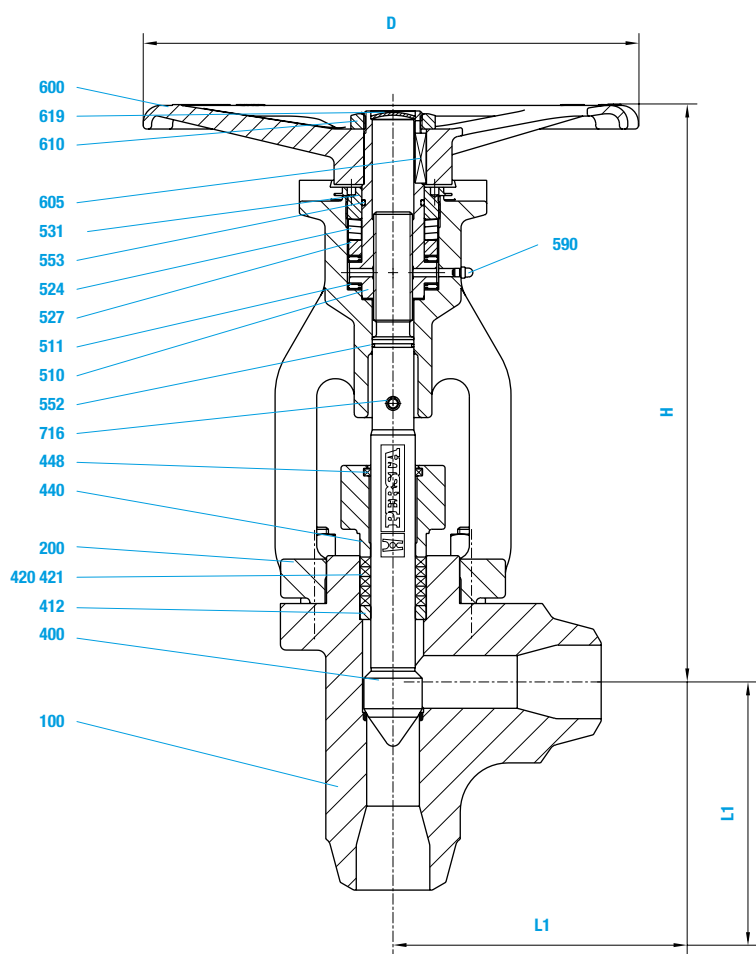


- **Globe valves** ▪ High pressure globe valve HD 2000 ▪ 200 LS ▪ PN 500 ▪ DN 10-65
- **Globe valves** ▪ Stop check valve ▪ 240 MM ▪ PN 500 ▪ DN 10-65
- **Globe valves** ▪ Lift check valve HD 2000 ▪ 240 MT ▪ PN 500 ▪ DN 10-65


240 MM Stop check valve
also available in angle pattern

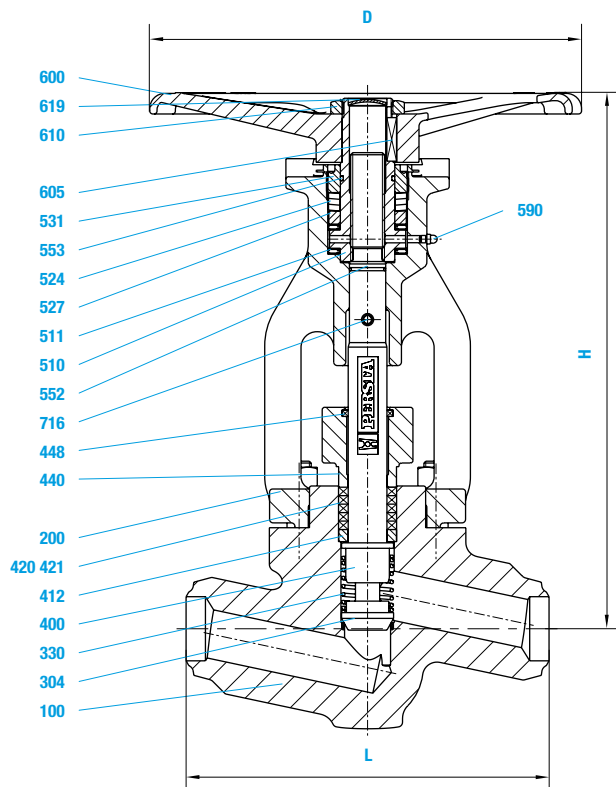

200 LS globe valve with back seat
also available in angle pattern

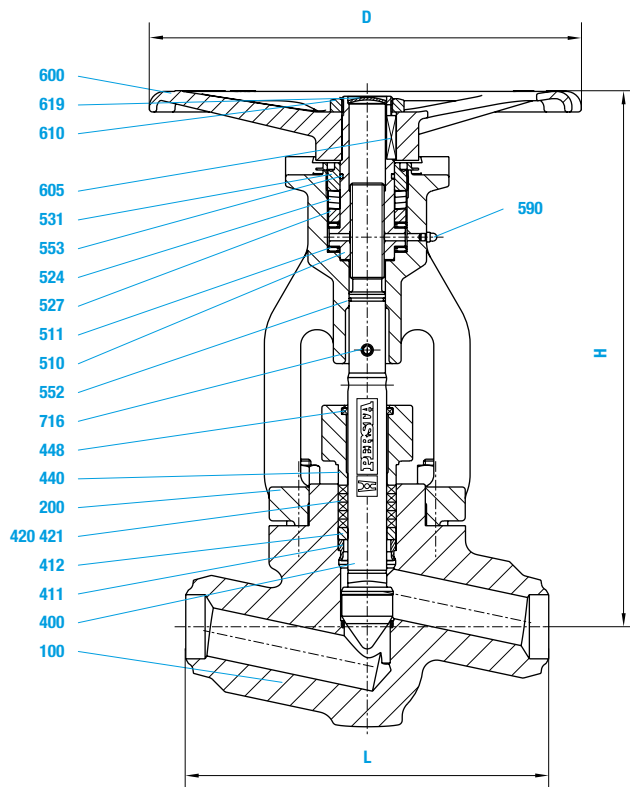

240 MT Lift check valve
also available in angle pattern

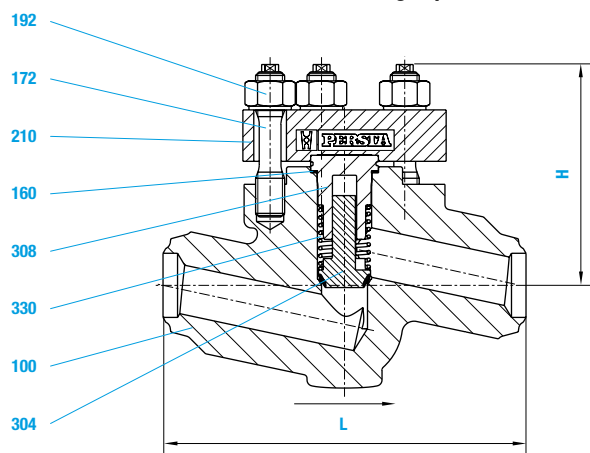

- **Globe valves** ■ High pressure globe valve HD 2000 ■ 200 LM/LS ■ PN 500 ■ DN 10-65
- **Globe valves** ■ Stop check valve ■ 240 MM ■ PN 500 ■ DN 10-65
- **Globe valves** ■ Lift check valve HD 2000 ■ 240 MT ■ PN 500 ■ DN 10-65

Materials								
Pos.	Component	1.0460 (21)	1.5415 (42)	1.7335 (44)	1.7383 (45) ²⁾	1.4903 (63) ²⁾	1.4901(66) ²⁾	1.4550 (89)
100	Body welded on with	1.0460	1.5415	1.7335	1.7383	1.4903	1.4901	1.4550
160	▶ Gasket	Stellite	Stellite	Stellite	Stellite	Stellite	Stellite	Stellite
170	Stud	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite
172	Stud	1.7709	1.7709	1.7709	1.7709	1.4923	1.4923	1.4980
190	Hexagonal nut	1.4923	1.4923	1.4923	1.4923	1.4986	1.4986	1.4986
192	Hexagonal nut	1.7218	1.7709	1.7218	1.4986	1.4986	1.4923	1.4986
200	Bonnet	1.4923	1.4923	1.4923	1.4923	1.4923	1.4986	1.4986
210	Cover	1.7379	1.7379	1.7379	1.7379	1.7379	1.7379	1.7379 ³⁾
304	▶ Disc	1.7380	1.7380	1.7380	1.7380	1.4903	1.4901	1.4550
308	Guide bush	1.4923	1.4923	1.4923	1.4923	1.4923	1.4923	1.4980
330	Pressure spring	1.4923	1.4923	1.4923	1.4923	1.4980	1.4980	1.4980
400	▶ Stem	2.4669	2.4669	2.4669	2.4669	2.4699	2.4699	2.4669
411	Back seat ring	1.4122 ¹⁾	1.4122 ¹⁾	1.4122 ¹⁾	1.4122 ¹⁽²⁾	1.4122 ¹⁽²⁾	1.4122 ¹⁽²⁾	1.4980 ¹⁾
412	Guide sleeve	1.4980	1.4980	1.4980	1.4980	1.4980	1.4980	1.4980
420	▶ Packing	0.7660	0.7660	0.7660	0.7660	0.7660	0.7660	0.7660
421	▶ Thrust ring	Pure graphite	Pure graphite	Pure graphite	Pure graphite	Pure graphite	Pure graphite	Pure graphite
440	Gland flange	Pure graphite	Pure graphite	Pure graphite	Pure graphite	Pure graphite	Pure graphite	Pure graphite
448	▶ Dirt scraper	1.7379	1.7379	1.7379	1.7379	1.7379	1.7379	1.7379 ³⁾
462	Stud	Graphite plait	Graphite plait	Graphite plait	Graphite plait	Graphite plait	Graphite plait	Graphite plait
464	Hexagonal nut	1.7709	1.7709	1.7709	1.7709	1.4923	1.4923	1.4980
510	▶ Yoke sleeve	1.7218	1.7218	1.7218	1.7218	1.4923	1.4923	1.4986
511	▶ Bearing	CW 713 R	CW 713 R	CW 713 R	CW 713 R	CW 713 R	CW 713 R	CW 713 R
524	Spring	WLS	WLS	WLS	WLS	WLS	WLS	WLS
527	Supporting ring	1.8159	1.8159	1.8159	1.8159	1.8159	1.8159	1.8159
531	Screwing	1.4021	1.4021	1.4021	1.4021	1.4021	1.4021	1.4021
552	▶ O-Ring	1.0460	1.0460	1.0460	1.0460	1.0460	1.4122	1.0460
553	▶ O-Ring	Viton	Viton	Viton	Viton	Viton	Viton	Viton
590	Grease nipple	Viton	Viton	Viton	Viton	Viton	Viton	Viton
600	Handwheel	5.8	5.8	5.8	5.8	5.8	5.8	5.8
605	Key	5.3106	5.3106	5.3106	5.3106	5.3106	5.3106	5.3106
610	Hexagonal nut	1.0060	1.0060	1.0060	1.0060	1.0060	1.0060	1.0060
619	Lock washer	St	St	St	St	St	St	St
716	Tension pin	St	St	St	St	St	St	St
	1.0904	1.0904	1.0904	1.0904	1.0904	1.0904	1.0904	1.0904

▶ Spare parts

1) On request stem with stellite seats
2) For temperatures > 570 °C stem with stellite seats in 1.4980 and hightemperature-packing.
3) Nickel plated

Dimensions/mm								
DN	L	L1	H	H1	Stroke	R/ Stroke	D	DIN/ISO 5210
10	150	75	228	99	10	5	140	F07 ¹⁾
15	150	75	228	99	10	5	140	F07 ¹⁾
20	180	90	280	122	16	8	225	F10
25	180	90	280	122	16	8	225	F10
32	300	150	445	182	27	9	360	F10/F14
40	300	150	445	182	27	9	360	F10/F14
50	300	150	445	182	27	9	360	F10/F14
65	360	200	563	208	36	12	450	F14/F16

1) Specify flange ends when placing order

Attention: In case of welding connections the permissible operating overpressure is valid for the corresponding tube dimension.

Weights/kg and Kvs-values						
DN	BW 200 LM	BW 202 LM	BW 240 MM	BW 200 LS	BW 240 MT	Kvs (m3/h) 200 LM / LS
10	6,0	6,0	6,0	6,0	3,8	2,3
15	6,0	6,0	6,0	6,0	3,8	3,4
20	11,5	11,5	11,5	11,5	7,9	6,2
25	11,3	11,3	11,3	11,3	7,7	7,9
32	47,5	47,5	47,5	47,5	30,5	20,0
40	47,0	47,0	47,0	47,0	30,0	24,1
50	46,5	46,5	46,5	46,5	29,5	28,3
65	107,0	107,0	128,0	107,0	72,0	48,5

■ **Globe valves** ■ High pressure globe valve DVA 25 / DVA 40 ■ 200 BZ ■ PD 25 / PD 40 ■ DN 80-250



Range of application

BW- Version Material	Admissible operating pressure [bar] at design temperature [°C] ¹⁾																																					
	PD	20	50	100	120	150	200	250	300	350	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610	620	630	640	650		
1.0460	25	250	250	250	250	250	235	206	184	155	125	119	113	107	102	96	85	71	58																			
1.5415	25	300	300	300	300	300	280	258	221	213	206	205	203	202	200	199	197	196	194	170	132	101	80	64														
1.7335	25	300	300	300	300	300	300	294	272	258	243	240	237	234	231	228	227	225	224	222	202	170	134	110	88	69	57	46										
1.7380	25	300	300	300	300	300	300	294	272	258	255	252	249	246	243	240	237	234	224	199	174	152	132	115	100	85	75	65	56	49								
1.6368	25	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	309	257	205	153	102																	
1.4903	25	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	316	290	263	238	213	191	169	150	132	115	100	85	75	65		
1.4901	25	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320	297	275	253	231	209	187	166	147	128	110	96	82		

1) Operating temperature = design temperature minus temperature surcharge acc. to DIN regulations.

Attention: Pressure rating of the materials 1.6368, 1.4903 and 1.4901 was reduced in the "cold" range to 320 bar. This pressure rating is only valid for the DVA 25.

Range of application

BW- Version Material	Admissible operating pressure [bar] at design temperature [°C] ¹⁾																																					
	PD	20	50	100	120	150	200	250	300	350	400	410	420	430	440	450	460	470	480	490	500	510	520	530	540	550	560	570	580	590	600	610	620	630	640	650		
1.0460	40	400	400	400	400	400	377	330	295	248	200	191	182	172	163	153	136	113	93																			
1.5415	40	480	480	480	480	480	448	413	354	342	330	328	325	323	321	318	316	314	311	272	212	161	127	102														
1.7335	40	481	481	481	481	481	471	436	413	389	384	380	375	370	365	363	361	358	356	323	272	215	175	141	110	91	74											
1.7380	40	480	480	480	480	480	480	471	436	413	408	403	398	394	389	384	380	375	358	318	278	243	212	184	160	137	120	104	90	79								
1.6368	40	600	600	600	600	600	600	600	600	600	600	600	600	600	600	577	495	412	328	245	163																	
1.4903	40	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	596	551	506	464	422	382	342	306	271	240	212	184	160	137	120	104		
1.4901	40	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	553	513	475	440	405	369	334	299	266	235	205	177	153	132		

1) Operating temperature = design temperature minus temperature surcharge acc. to DIN regulations.

Attention: Pressure rating of the materials 1.6368, 1.4903 and 1.4901 was reduced in the "cold" range to 600 bar. This pressure rating is only valid for the DVA 40.

■ **Globe valves** ■ High pressure globe valve DVA 25 / DVA 40 ■ 200 BZ ■ PD 25 / PD 40 ■ DN 80-250

Standard features

- Straight pattern
- Die-forged valve body and bonnet
- Pressure sealing bonnet acc. to VGB-guidelines
- Throttle disc
- Body seat welded on integratedly
- Outside screw and yoke
- Position indicator / Anti-rotation device
- Yoke sleeve supported at the top and the bottom
By means of needle bearings
- Non-turning, rising stem
- Universal valve head for mounting actuators

Pressure and temperature ratings

- Pressure rating up to 600 bar
- Temperature rating up to 650 °C

Materials

- 1.0460
- 1.5415
- 1.7335
- 1.7383
- 1.6368
- 1.4903
- 1.4901

Further materials and sizes on request.

Media

Depending on the material the globe valves are suitable for water, gas, oil and other non aggressive media

Fields of application

Chemical industries, industries and power plant.

Design Highlights


- Die-forged body and bonnet
- Pressure sealing bonnet
- Body seat welded on integratedly with stellite
- Extended bonnet
- Outside located anti twist device
- Non-turning, rising stem
- Gland flange and gland ring in two separate pieces
- Yoke sleeve supported by needle bearings
- Cup springs above the upper needle bearing

Benefits


- Free from porosity and shrink holes
- Best possible sealing function
- Extremely resistant to wear
- To reduce temperatures
- Usable as position indicator
- Minimum packing wear
- Damage to the stem by irregular tightening of gland bolts is avoided
- To minimize the expenditure of effort when operating the valve
- To maintain the necessary closing forces at elongation changes between stem and yoke arms due to thermal changes. Also to protect against excess torsion when electric actuators are fitted.

■ **Globe valves** ■ High pressure globe valve DVA 25 / DVA 40 ■ 200 BZ ■ PD 25 / PD 40 ■ DN 80-250

DVA 25 ■ PD 25 ■ DN 80-250

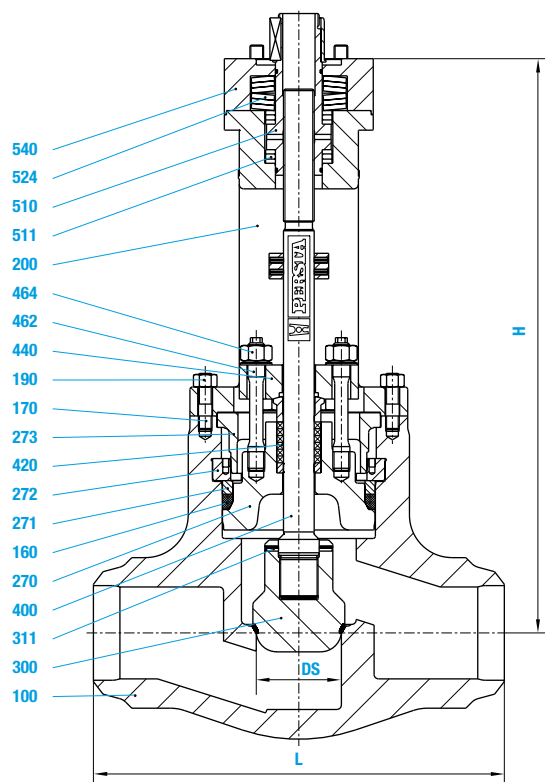

DVA 40 ■ PD 40 ■ DN 80-200

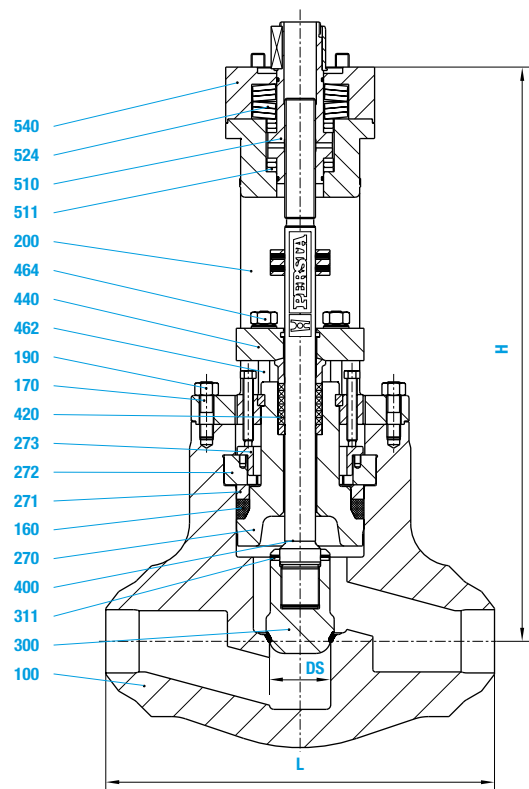

■ **Globe valves** ■ High pressure globe valve DVA 25 / DVA 40 ■ 200 BZ ■ PD 25 / PD 40 ■ DN 80-250

Materials								
Pos.	Component	1.0460 (21)	1.5415 (42)	1.7335 (44)	1.7383 (45)	1.6368 (46)	1.4903 (63)	1.4901 (66)
100	Body welded on with	1.0460	1.5415	1.7335	1.7383	1.6368	1.4903	1.4901
160	▶ Gasket	Stellite	Stellite	Stellite	Stellite	Stellite	Stellite	Stellite
170	Stud	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite
190	Hexagonal nut	1.7709	1.7709	1.7709	1.7709	1.4923	1.4923	1.4923
200	Bonnet	1.7218	1.7218	1.7218	1.7218	1.7218	1.7218	1.7218
270	Cover	1.7379	1.7379	1.7379	1.7379	1.7379	1.7379	1.7379
271	Thrust ring	1.7383	1.7383	1.7383	1.7383	1.4903	1.4903	1.4901
272	Segmentring	1.7383	1.7383	1.7383	1.7383	1.4903	1.4903	1.4901
273	Cover	1.7383	1.7383	1.7383	1.7383	1.4903	1.4903	1.4901
300	▶ Disc welded on with	1.4903	1.4903	1.4903	1.4903	1.4903	1.4903	1.4901
311	Grooved pin	Stellite	Stellite	Stellite	Stellite	Stellite	Stellite	Stellite
400	▶ Stem	1.4571	1.4571	1.4571	1.4571	1.4571	1.4571	1.4571
400	▶ Stem up to 500°C	1.4122	1.4122	1.4122	1.4122	1.4923	1.4923	1.4980
420	▶ Packing	1.4980*	1.4980*	1.4980*	1.4980*	1.4980	1.4980	1.4980
440	Gland flange	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite
462	Stud	1.7380	1.7380	1.7380	1.7380	1.7380	1.7380	1.7380
464	Hexagonal nut	1.7709	1.7709	1.7709	1.7709	1.4923	1.4923	1.4923
510	▶ Yoke sleeve	1.7218	1.7218	1.7218	1.7218	1.4923	1.4923	1.4923
511	▶ Bearing	CW713R	CW713R	CW713R	CW713R	CW713R	CW713R	CW713R
524	Spring	WLS	WLS	WLS	WLS	WLS	WLS	WLS
540	Flange	Spring Steel	Spring Steel	Spring Steel	Spring Steel	Spring Steel	Spring Steel	Spring Steel
		1.0460	1.0460	1.0460	1.0460	1.0460	1.0460	1.0460

▶ Spare parts

* In PD 25 up to DN 150
* In PD 40 up to DN 125

Dimensions/mm DVA 25							
DN	DS	L	H	Stroke	R/Stroke	H-Wheel	DIN/ISO 5210
80	64	305	450 (475)	32	11	450	F10 (F14)
100	82	406	575	42	14	500	F14
125	100	483	675 (725)	51	17	600	F14 (F16)
150	122	559	800 (850)	62	21	720	F16 (F25)
200	160	711	950 (1000)	82	27		F25 (F30)
250	190	864	1075 (1150)	96	24		F30 (F35)


Weights/kg and Kvs-values DVA 25		
DN	BW	Kvs (m3/h)
80	69	71
100	132	95
125	200	141
150	378	210
200	615	362
250	1120	510

Dimensions/mm DVA 40							
DN	DS	L	H	Stroke	R/Stroke	H-Wheel	DIN/ISO 5210
80	57	368	575	28	9	500	F14
100	72	359	675 (725)	38	13	600	F14 (F16)
125	90	533	800 (850)	45	15	720	F16 (F25)
150	111	610	950 (1000)	57	19		F25 (F30)
200	146	762	1075 (1150)	75	19		F30 (F35)


Weights/kg and Kvs-values DVA 40		
DN	BW	Kvs (m3/h)
80	145	45
100	225	73
125	430	114
150	715	174
200	1140	300

■ **Globe valves** ■ **Further standards**


Screw down non return valve 240 ME

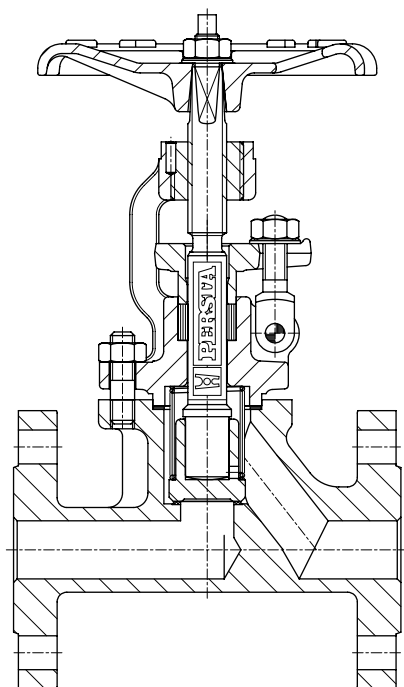

Angle globe valve 202 AE

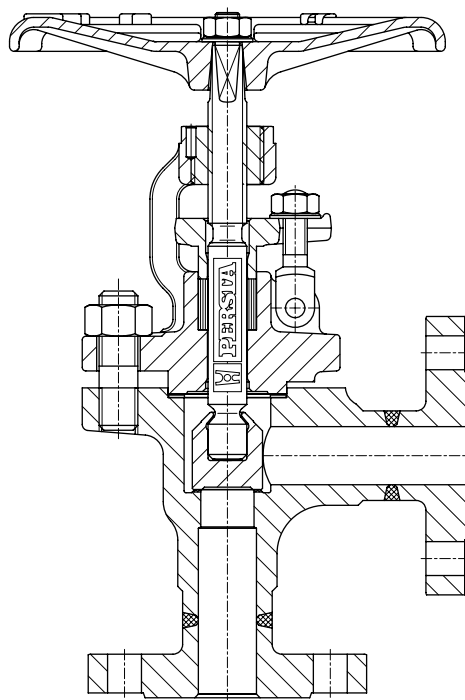


Changeover valve 203 EM

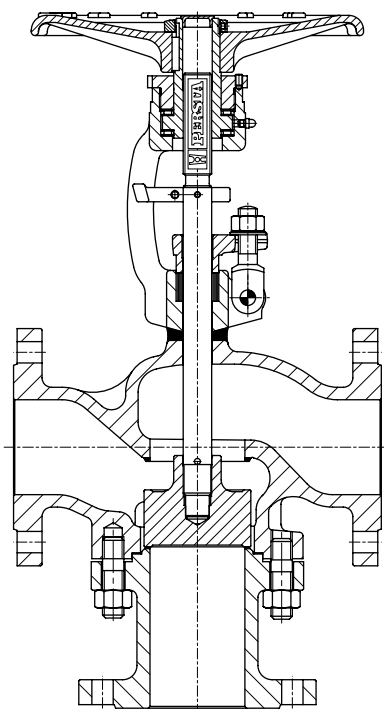

■ Globe valves ■ Actuator variants


Universal Valve-Head

For subsequent assembly of E-actuators without welding




Assembly of E-actuators

Standard design DN 65




For running a particular limit of travel e.g. with air or current

Example

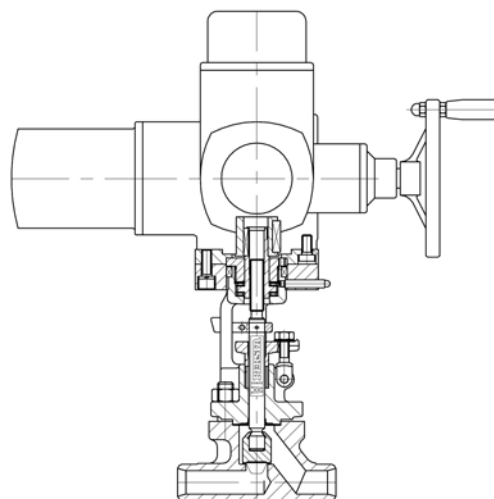


PERCON piston drive

Spring opening




PERCON piston drive

Spring closing




Example

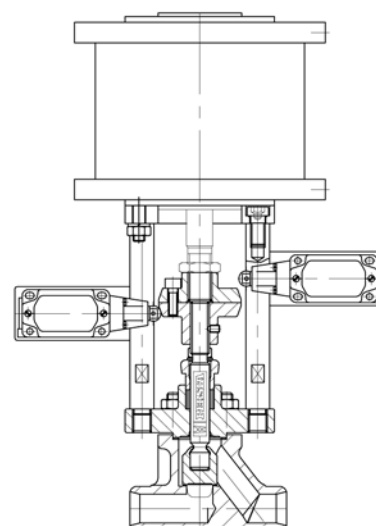

■ **Globe valves** ■ **Variants**


Disc with edge seat

For media with small quantities of impurities




Disc with soft seat

E.g. of lead or PTFE for crystallizing media etc.




Disc with elastomer coated obturator

E.g. with PTFE spacer ring for special media up to approx. 280 °C




Control disc

Pinned down suitable for operating in intermediate position




PTFE-stuffing box

With chambers for aggressive media up to approx. max. 280 °C




Stuffing box with lantern and test screw plug

Also for sealing water or leakage suction




Stuffing box with central cup spring tightening

In order to minimize maintenance costs




Hard faced back seat




Limit switches

Can be supplied mechanically or inductively




On-Off position indicator

With sheet metal bracket




Non-rotating stem

In order to reduce packing wear




Stem extension




PERLOC system locking mechanism

Also for interlocking mechanism (safety circuits)




Locking mechanism

With padlock




■ **Globe valves** ■ **Special valves**


Y-pattern stop check valve

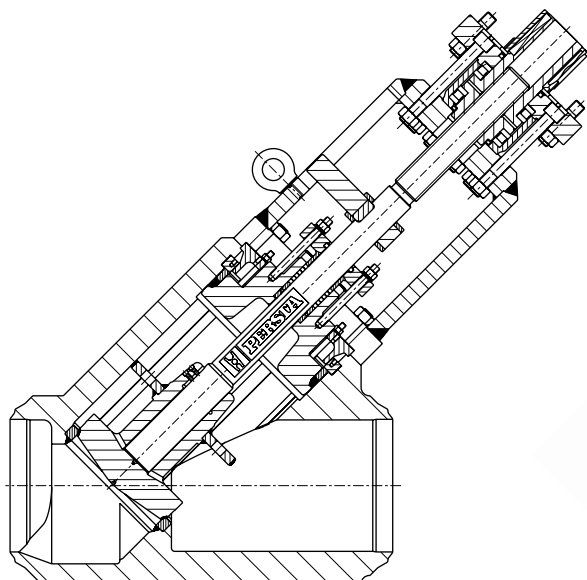


**Bellow seal
Y-valve**

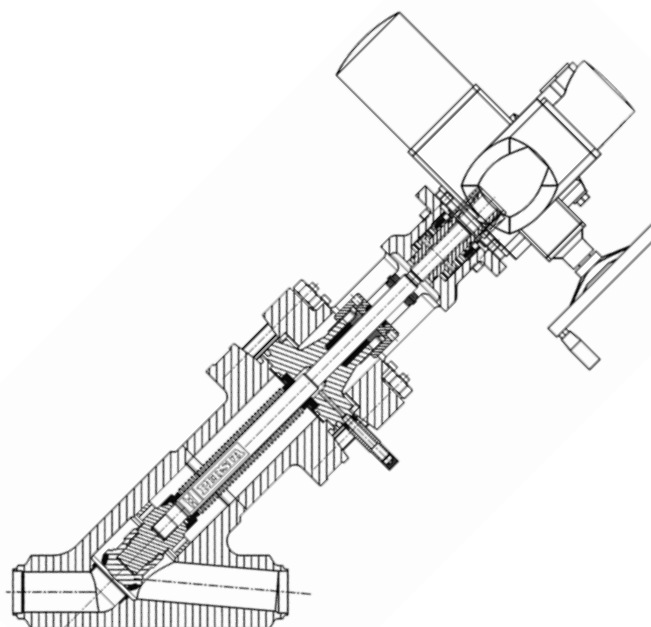

**Globe valve
with insulating section**

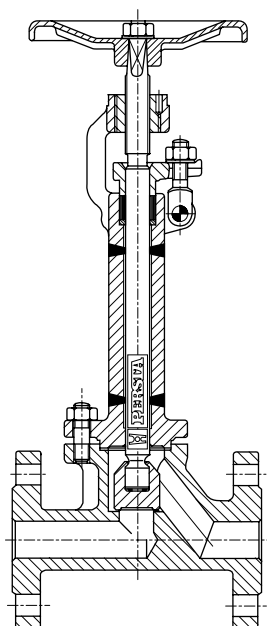

Monobloc valve

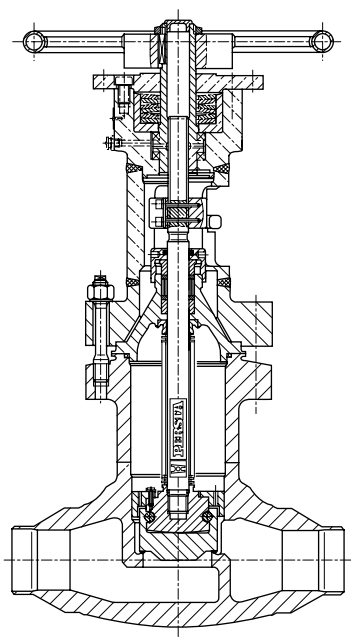

Monobloc-Z-valve

