



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891
info@raasm.com

P/N 62095

Pneumatic piston pump s. 600, R 50:1 - 1500 g/min,
with PU seals and suction tube 940 mm

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road
construction, Manufacturing industry, Mining industry,
Lube trucks and transports, Railway transport

FEATURES

Flow rate	1500 g/min
Ratio	50:1
Compatible fluids	greases, medium/high viscosity
Suction tube upper body	aluminum
Suction tube	carbon steel
Air inlet connection	G 1/4" (f)
Fluid outlet connection	G 3/8" (f)
Air working pressure	6 ÷ 8 bar
Average air consumption	330 l/min
Noise level	81 dB
Air max pressure	8 bar
Suitable for drums	180 ÷ 220 kg
Pump	-
Hose reels	-
Gun	-
Drum cover	-
Follower plate	-
Grease connection hose	-
Nipple	-



OVERALL DIMENSIONS (mm)

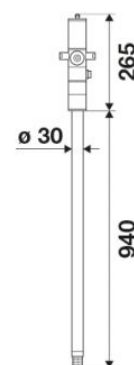

Drip-tray	-
Packing	No. 1 - 0,020 m3
Weight	6,7 kg