
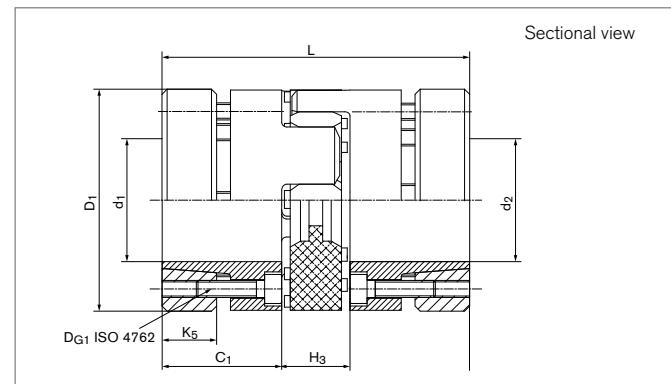


Elastomer Jaw Couplings

RINGFEDER® GWE 5112

Servo-Insert coupling with outer cone

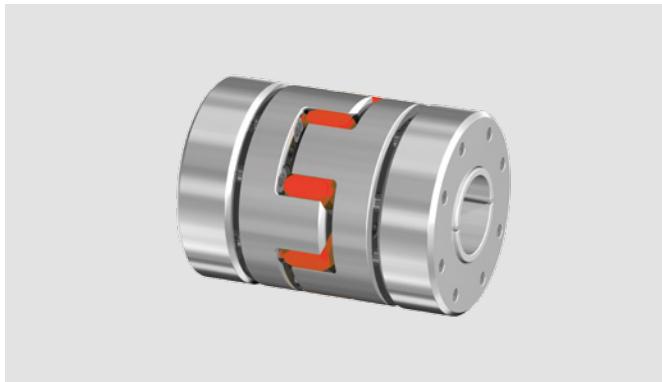

Size	d ₁ :d ₂ min-max		C ₁	D ₁	H ₃	K ₅	L
	mm	mm					
14	6 - 14		18,5	32	13	8	50
19	8 - 20		25	40	16	10	66
24	11 - 25		30	55	18	13	78
28	15 - 36		35	65	20	16	90
38	20 - 41		45	80	24	22	114
42	25 - 50		50	95	26	25	126
48	28 - 55		56	105	28	28	140

Transmission of the couplings transmissible torque T can not longer be guaranteed for certain with borings $< d_{min}$. Types with borings $< d_{min}$, however, can be supplied.

Moment of inertia and weight (mass) are calculated with reference to the largest bore size.

Size	T	H _{es}	n _{max}	J	G _w	D _{G1}	T _{A1}
14	12,5	98 SH A	25400	0,014	0,042	4 x M3	1,8
19	17	98 SH A	19000	0,063	0,158	6 x M4	3
24	60	98 SH A	13800	0,26	0,304	4 x M5	6
28	160	98 SH A	11700	0,63	0,505	8 x M5	6
38	325	98 SH A	9550	1,96	0,934	8 x M6	10
42	450	98 SH A	8050	6,43	3,8	4 x M8	35
48	525	98 SH A	7200	10,54	4,9	4 x M10	69

To continue see next page

Elastomer Jaw Couplings RINGFEDER® GWE 5112

Transmissible torque T [Nm]

Size	Transmissible torque																			
	Nm																			
Ø6	Ø10	Ø11	Ø13	Ø14	Ø15	Ø17	Ø19	Ø20	Ø24	Ø25	Ø27	Ø30	Ø32	Ø36	Ø38	Ø42	Ø44	Ø48	Ø50	Ø55
14	3,6	9	12,5	12,5	12,5	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
19	---	17	17	17	17	17	17	17	---	---	---	---	---	---	---	---	---	---	---	
24	---	---	22	37	46	56	60	60	60	60	60	60	60	60	60	60	60	60	60	
28	---	---	---	---	---	56	68	114	134	160	160	160	160	160	160	160	160	160	160	
38	---	---	---	---	---	---	---	---	134	230	261	325	325	325	325	325	325	325	325	
42	---	---	---	---	---	---	---	---	---	260	329	450	450	450	450	450	450	450	450	
48	---	---	---	---	---	---	---	---	---	326	450	525	525	525	525	525	525	525	525	

Explanations

d_{1;d_{2min}} = Min. bore diameter d_{1/d₂}
d_{1;d_{2max}} = Max. bore diameter d_{1/d₂}
d_{1k;d_{2kmin}} = Min. bore diameter d_{1/d₂}
 with keyway acc. to DIN 6885-1
d_{1k;d_{2kmax}} = Max. bore diameter d_{1/d₂}
 with keyway acc. to DIN 6885-1
C₁ = Guided length in hub bore

D₁ = Outer diameter
H₃ = Length of damping module
K₅ = Width of clamping ring
L = Total length
T = Transmissible torque at given T_A
H_{es} = Hardness of the elastomeric spider

n_{max} = Max. rotation speed
J = Total moment of inertia
G_w = Weight
D_{G1} = Thread
T_{A1} = Tightened torque of clamping screw D_{G1}

Ordering example

Series Size	Bore diameter d ₁	Bore diameter d ₂	Spider hardness (optional) ¹⁾	Spider bore d _{b2} (optional) ¹⁾
GWE 5112-42	32	41	64 SH D	42

¹⁾If a different spider hardness is selected, the detailed technical data for the sprockets must be observed. See chapter „Elastomer Jaw Couplings RINGFEDER® GWE Technical description“ in Product Paper & Tech Paper „RINGFEDER® Elastomer Jaw Couplings“

Further information on
RINGFEDER® GWE 5112
 on www.ringfeder.com

Disclaimer of liability

All technical details and notes are non-binding and cannot be used as a basis for legal claims. The user is obligated to determine whether the represented products meet his requirements. We reserve the right carry out modifications at any time in the interests of technical progress.