



Suction Strainer ▪ Type SUS (Polyamide End Cap)

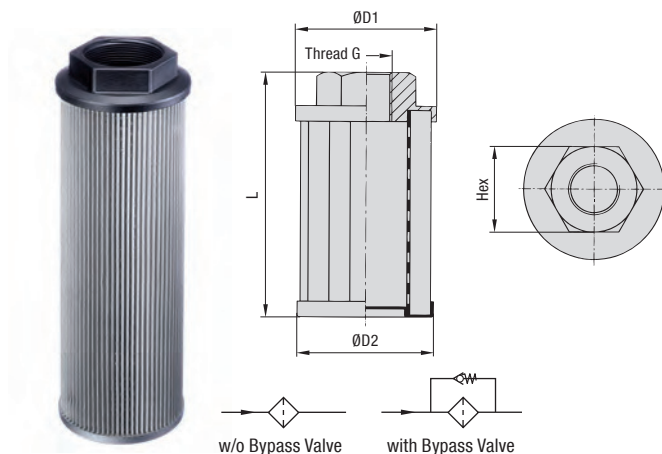

Flow Characteristics

Nominal Flow Rate vs. Pressure Drop ΔP

The following characteristics are valid for Mineral oils with a mass density of 0,85 kg/dm³ and a kinematic viscosity of 30 mm²/s (cSt) at +38 °C / +100 °F.

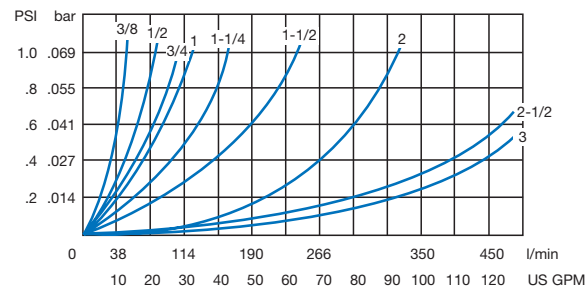

Characteristics

Designed as in-tank suction strainer elements for direct installation into suction lines of pumps; should always be installed below the minimum fluid level of the reservoir

Features

- Available with female BSP thread (ISO 228) or female NPT thread (ANSI B1.20.1)
- Operating temperature range: -20 °C ... +100 °C / -4 °F ... +212 °F

Media Compatibility

- Suitable for use with Mineral and Petroleum based hydraulic fluids (HL and HLP)

Materials

- Threaded end cap made of glass-fibre reinforced Polyamide (PA); see page E35 for version with Aluminium end cap
- Lower end cap and support tube made of Steel, zinc-plated
- Standard filter material is Stainless Steel Mesh (125 µm); alternative micron ratings of 60 µm and 250 µm on request

Consult STAUFF for alternative materials.

Options

- Integrated bypass valve with an opening pressure of 0,2 bar (3 PSI) to reduce the risks of high-pressure drops that can be caused by contaminated strainer elements or high-viscosity fluids

Special sizes, designs, materials and configurations are available on request. Consult STAUFF for details.

Dimensions and Technical Data (Female BSP Threaded Version)

Group Size	Thread G	Dimensions (mm/in)				Filter Surface	Max. Flow Rate
		ØD1	ØD2	L	Hex		
040 - B06F - 075	G3/8 BSP	39,5 1.56	38,5 1.53	75 2.93	22 .87	279 cm ² 43 in ²	12 l/min 3.1 US GPM
050 - B06F - 067	G3/8 BSP	50 1.97	49 1.93	67 2.64	26 1.02	296 cm ² 46 in ²	12 l/min 3.1 US GPM
050 - B08F - 105	G1/2 BSP	50 1.97	49 1.93	105 4.13	26 1.02	518 cm ² 80 in ²	15 l/min 3.9 US GPM
068 - B12F - 105	G3/4 BSP	68 2.68	66 2.60	105 4.13	34 1.34	676 cm ² 105 in ²	25 l/min 6.5 US GPM
068 - B16F - 140	G1 BSP	68 2.68	66 2.60	140 5.51	42 1.65	930 cm ² 144 in ²	50 l/min 13.0 US GPM
088 - B20F - 140	G1-1/4 BSP	88 3.46	85 3.35	140 5.51	50 1.97	1172 cm ² 182 in ²	65 l/min 16.9 US GPM
088 - B24F - 140	G1-1/2 BSP	88 3.46	85 3.35	140 5.51	60 2.36	1172 cm ² 182 in ²	140 l/min 36.4 US GPM
102 - B24F - 200	G1-1/2 BSP	102 4.02	100 3.94	200 7.87	72 2.83	2427 cm ² 376 in ²	140 l/min 36.4 US GPM
102 - B32F - 200	G2 BSP	102 4.02	100 3.94	200 7.87	72 2.83	2427 cm ² 376 in ²	230 l/min 59.8 US GPM
102 - B32F - 225	G2 BSP	102 4.02	100 3.94	225 8.86	72 2.83	2811 cm ² 436 in ²	230 l/min 59.8 US GPM
102 - B32F - 260	G2 BSP	102 4.02	100 3.94	260 10.24	72 2.83	3249 cm ² 504 in ²	230 l/min 59.8 US GPM
102 - B32F - 300	G2 BSP	102 4.02	100 3.94	300 11.81	72 2.83	3798 cm ² 589 in ²	230 l/min 59.8 US GPM
131 - B40F - 191	G2-1/2 BSP	131 5.16	128 5.04	191 10.24	86 3.39	2430 cm ² 377 in ²	340 l/min 88.4 US GPM
131 - B40F - 212	G2-1/2 BSP	131 5.16	128 5.04	212 8.35	86 3.39	2748 cm ² 426 in ²	340 l/min 88.4 US GPM
131 - B48F - 272	G3 BSP	131 5.16	128 5.04	272 10.71	96 3.78	3626 cm ² 562 in ²	400 l/min 104 US GPM
150 - B32F - 151	G2 BSP	150 5.91	145 5.71	151 5.94	70 2.76	1812 cm ² 281 in ²	400 l/min 104 US GPM



Dimensions and Technical Data (Female NPT Threaded Version)

Group Size	Thread G	Dimensions (mm/in)				Filter Surface	Max. Flow Rate
		ØD1	ØD2	L	Hex		
050 - N06F - 067	3/8 NPT	50 1.97	49 1.93	67 2.64	26 1.02	296 cm ² 46 in ²	12 l/min 3.1 US GPM
050 - N06F - 090	3/8 NPT	50 1.97	49 1.93	90 3.54	26 1.02	430 cm ² 67 in ²	12 l/min 3.1 US GPM
050 - N08F - 105	1/2 NPT	50 1.97	49 1.93	105 4.13	26 1.02	518 cm ² 80 in ²	15 l/min 3.9 US GPM
068 - N12F - 105	3/4 NPT	68 2.68	66 2.60	105 4.13	34 1.34	676 cm ² 105 in ²	25 l/min 6.5 US GPM
068 - N16F - 140	1 NPT	68 2.68	66 2.60	140 5.51	42 1.65	930 cm ² 144 in ²	50 l/min 13.0 US GPM
088 - N20F - 140	1-1/4 NPT	88 3.46	85 3.35	140 5.51	50 1.97	1172 cm ² 182 in ²	65 l/min 16.9 US GPM
088 - N20F - 195	1-1/4 NPT	88 3.46	85 3.35	195 7.68	60 2.36	1709 cm ² 265 in ²	65 l/min 16.9 US GPM
088 - N24F - 140	1-1/2 NPT	88 3.46	85 3.35	140 5.51	60 2.36	1172 cm ² 182 in ²	140 l/min 36.4 US GPM
088 - N24F - 226	1-1/2 NPT	88 3.46	85 3.35	226 8.90	60 2.36	2012 cm ² 312 in ²	140 l/min 36.4 US GPM
088 - N24F - 260	1-1/2 NPT	88 3.46	85 3.35	260 10.24	60 2.36	2344 cm ² 363 in ²	140 l/min 36.4 US GPM
102 - N24F - 200	1-1/2 NPT	102 4.02	100 3.94	200 7.87	72 2.83	2427 cm ² 376 in ²	140 l/min 36.4 US GPM
102 - N32F - 260	2 NPT	102 4.02	100 3.94	260 10.24	72 2.83	3249 cm ² 504 in ²	230 l/min 59.8 US GPM
131 - N40F - 212	2-1/2 NPT	131 5.16	128 5.04	212 8.35	86 3.39	2748 cm ² 426 in ²	340 l/min 88.4 US GPM
131 - N48F - 272	3 NPT	131 5.16	128 5.04	272 10.71	96 3.78	3626 cm ² 562 in ²	400 l/min 104 US GPM

Flow Characteristics

Nominal Flow Rate vs. Pressure Drop ΔP

The following characteristics are valid for Mineral oils with a mass density of 0,85 kg/dm³ and a kinematic viscosity of 30 mm²/s (cSt) at +38 °C / +100 °F.

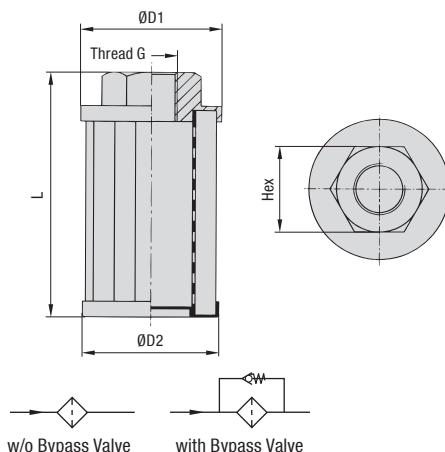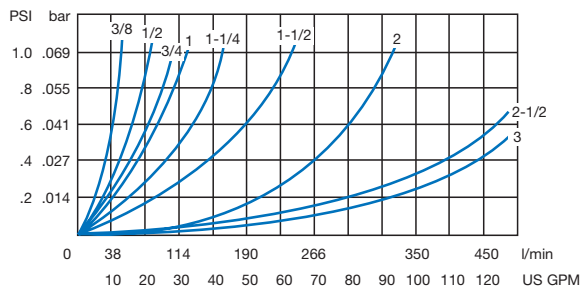

Suction Strainers • Type SUS (Aluminium End Cap)



Characteristics

Designed as in-tank suction strainer elements for direct installation into suction lines of pumps; should always be installed below the minimum fluid level of the reservoir

Features

- Available with female NPT thread (ANSI B1.20.1)
- Operating temperature range: -20 °C ... +100 °C / -4 °F ... +212 °F

Media Compatibility

- Suitable for use with Mineral and Petroleum based hydraulic fluids (HL and HLP)

Materials

- Threaded end cap made of Aluminium; see page E34 for version with Polyamide (PA) end cap
- Lower end cap and support tube made of Steel, zinc-plated
- Filter material made of Stainless Steel Mesh (125 µm); alternative micron ratings of 60 µm and 250 µm on request

Consult STAUFF for alternative materials.

Options

- Integrated bypass valve with an opening pressure of 0,2 bar (3 PSI) to reduce the risks of high-pressure drops that can be caused by contaminated strainer elements or high-viscosity fluids

Special sizes, designs, materials and configurations are available on request. Consult STAUFF for details.

Dimensions and Technical Data (Female NPT Threaded Version)

Group Size	Thread G	Dimensions (mm/in)				Filter Surface	Max. Flow Rate
		ØD1	ØD2	L	Hex		
050 - N06F - 067	3/8 NPT	50	49	67	26	296 cm ²	12 l/min
		1.97	1.93	2.64	1.02	46 in ²	3.1 US GPM
050 - N06F - 090	3/8 NPT	50	49	90	26	430 cm ²	12 l/min
		1.97	1.93	3.54	1.02	67 in ²	3.1 US GPM
050 - N08F - 105	1/2 NPT	50	49	105	26	518 cm ²	15 l/min
		1.97	1.93	4.13	1.02	80 in ²	3.9 US GPM
068 - N12F - 105	3/4 NPT	68	66	105	34	676 cm ²	25 l/min
		2.68	2.60	4.13	1.34	105 in ²	6.5 US GPM
068 - N16F - 140	1 NPT	68	66	140	42	930 cm ²	50 l/min
		2.68	2.60	5.51	1.65	144 in ²	13.0 US GPM
088 - N20F - 140	1-1/4 NPT	88	85	140	50	1172 cm ²	65 l/min
		3.46	3.35	5.51	1.97	182 in ²	16.9 US GPM
088 - N20F - 195	1-1/4 NPT	88	85	195	60	1709 cm ²	65 l/min
		3.46	3.35	7.68	2.36	265 in ²	16.9 US GPM
088 - N24F - 140	1-1/2 NPT	88	85	140	60	1172 cm ²	140 l/min
		3.46	3.35	5.51	2.36	182 in ²	36.4 US GPM
088 - N24F - 226	1-1/2 NPT	88	85	226	60	2012 cm ²	140 l/min
		3.46	3.35	8.90	2.36	312 in ²	36.4 US GPM
088 - N24F - 260	1-1/2 NPT	88	85	260	60	2344 cm ²	140 l/min
		3.46	3.35	10.24	2.36	363 in ²	36.4 US GPM
088 - N32F - 260	2 NPT	88	85	260	70	2344 cm ²	230 l/min
		3.46	3.35	10.24	2.76	363 in ²	59.8 US GPM
150 - N40F - 213	2-1/2 NPT	150	145	213	90	2741 cm ²	340 l/min
		5.91	5.71	8.39	3.54	425 in ²	88.4 US GPM
150 - N48F - 272	3 NPT	150	145	272	100	3625 cm ²	400 l/min
		5.91	5.71	10.71	3.94	562 in ²	104 US GPM

Order Codes

SUS - P - 088 - B24F - 140 - 125 - 0				
①	②	③	④	⑤
① Type				
Suction Strainer for direct installation into suction lines of pumps				SUS
② Material of Threaded End Cap				
Glass-fibre reinforced Polyamide				P
Aluminium (for female NPT threaded version only)				A
③ Group Size				
Select 'Group Size' from corresponding column in dimensional tables				
The group size is defined by the diameter ØD1 of the threaded end cap, the thread code (type and size) and the total length of the suction strainer element (e.g. 040-B06F-075).				
④ Filter Material / Micron Rating				
Stainless Steel Mesh, 125 µm (standard option)				125
Stainless Steel Mesh, 60 µm				060
Stainless Steel Mesh, 250 µm				250
Consult STAUFF for alternative materials / micron ratings.				
⑤ Bypass Option				
Without bypass valve (standard option)				0
Integrated bypass valve with opening pressure of 0,2 bar (3 PSI)				3