

EX PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The intrinsically safe EX pressure transmitter EXNA 8854 is certified to ATEX and IECEx for applications in Ex-Zones 0, 1, 2 (gas), 20, 21, 22 (dust) and mining. Due to the wide range of variants and pressure ranges from 0.1 to 1000 bar it can be configured for almost any application appropriately.



Applications

- Ex Zone 0, 1, 2 / Gas
- Ex Zone 20, 21, 22 / Dust
- Ex Underground Mining

Features

- Ex ATEX / IECEx
- Pressure ranges from 100 mbar
- Versions with frontal flush diaphragm
- Media temperature to 150°C
- EMC protection, IEC 61000

02/2019

Data sheet H72334d

Technical Data

Measuring principle	Piezoresistive	Ambient temperature	T3: -40°C ... +125°C T4: -40°C ... +85°C T6: -40°C ... +50°C
Measuring range	0 ... 0.1 to 0 ... 1000 bar	Approval / conformity	DNV-GL Ex according to standards, IEC/EN 60079-0 / -11/-26, EN 50303
Output signal	4 ... 20 mA	Type of protection	Ex II 1G Ex ia IIC T3 ... T6 Ga II 1D Ex ia IIIC T145°C Da I M1 Ex ia I Ma
Media temperature	T3: -40°C ... +150°C T4: -40°C ... +100°C T6: -40°C ... +50°C		

Subject to change

Ordering information/type code

				8854 . XX	XX	XX	XX	XX	XX
Measuring range ¹⁾	Pressure measurement range [bar]	Over pressure [bar]	Burst pressure [bar]						
	0 ... 0.1	3	200	66					
	0 ... 0.16	3	200	67					
	0 ... 0.2	3	200	68					
	0 ... 0.4	3	200	69					
	0 ... 0.6	3	200	70					
	0 ... 1	3	200	71					
	0 ... 1.6	4.8	200	73					
	0 ... 2.5	7.5	200	75					
	0 ... 4	12	200	76					
	0 ... 6	18	200	77					
	0 ... 10	30	200	78					
Sensor	Type 02 relative (Accuracy NLH BSL ± 0.25 % FS)				P2				
	Type 02 absolute (Accuracy NLH BSL ± 0.25 % FS)				A2				
	Type 01 relative (Accuracy NLH BSL ± 0.1 % FS) ⁴⁾				P1				
	Type 01 absolute (Accuracy NLH BSL ± 0.1 % FS) ⁴⁾				A1				
Pressure connection	1/4" NPT male				30				
	1/2" NPT male				39				
	G1/4" female				10				
	G1/4" male				15				
	G1/2" male				21				
	G1/2" male, frontal membrane				31				
	G1/2" male, flush membrane				32				
Electrical connection	Male electrical connector EN 175301-803-A, Mat. plastic				05				
	Male electrical connector Binder 723, 5-pole, Metal				14				
	Male electrical connector MIL-C 26482, 6-pole, metal				02				
	Male electrical connector M12x1, 4-pole, metal				32				
	PUR cable, length ... mm (IP67) ⁵⁾				22				
	FEP cable, length ... mm (IP67)				39				
Output signal	Signal output	Load resistance	I (supply)	U (supply)					
	4 ... 20 mA	(U _{supply} -9 V) / 20 mA		9 ... 28 VDC	19				
Accessories	Special oil filling: Anderol				94				
	Female electrical plug EN 175301-803-A (DIN43650-A)				58				
	Female electrical plug Binder 723, 5-pole, metal				37				
	Female electrical plug MIL-C 26482, 6-pole, metal				32				
	Temperature class T3				T3				
	Temperature class T4				T4				
	Temperaturklasse T6				T6				
	Pressure peak damping element ²⁾				DE				
	Titanium (Material pressure connection and housing)				Ti				
	Zener barrier 28V/93mA; R $\approx 300\Omega$; Ordering code F90138								


¹⁾ Customized pressure ranges upon request²⁾ Only with pressure connection 30, 39, 15, 21³⁾ P2/A2 ≤ 120 bar⁴⁾ P1/A1 ≤ 270 bar⁵⁾ $\leq +50^\circ\text{C}$ ⁶⁾ ≤ 600 bar

Specifications		
Electrical Data	Zener barrier	28V/93 mA/0.65 W
	Output / supply voltage	4 ... 20 mA: 9 ... 28 VDC
	Rise time	Typ. 1 ms / 10 ... 90 % nominal pressure
Environmental conditions	Media temperature	T3: -40°C ... +150°C T4: -40°C ... +100°C T6: -40°C ... +50°C
	Ambient temperature	T3: -40°C ... +125°C T4: -40°C ... +85°C T6: -40°C ... +50°C
	Protection ¹⁾	Min. IP65
	Humidity	Max. 95 % relative
	Vibration	EN 60068-2-6: 10 g (4...2000 Hz)
	Shock	EN 60068-2-27: 100 g/ 6 ms
EMC Protection	Emission	EN 61000-4-3: 10 V/m
	Immunity	IEC 61000-4-2: 8 kV K./15 kV L.
Mechanical Data	Sensor (wetted parts)	1.4435 (AISI316L) or titanium
	Pressure connection (wetted parts)	1.4435 (AISI316L) or titanium
	Housing	1.4435 (AISI316L) or titanium
	Sealing	FKM 70 Sh; EPDM / Kalrez
	Male electrical plug	See ordering information
	Weight	~ 220 g
	Mounting torque	25 Nm


¹⁾ Provided female connector is mounted according to instructions

Accuracy						
		Sensor 01 (P1/A1) NLH ± 0.1 %				
Pressure measuring range	[bar]	0.1 ... 0.5	0.5 ... 2	2 ... 100	100 ... 600	> 600
NLH @ +25°C (BSL through 0)	[% FS typ.]	± 0.1	± 0.1	± 0.1	± 0.1	-
TEB @ 0 ... +70°C	[% FS typ.]	± 0.8	± 0.3	± 0.3	± 0.3	± 0.3
TEB @ -25 ... +100°C	[% FS typ.]	± 1.3	± 0.75	± 0.75	± 0.75	± 0.75
Long term stability 1 year		< 4 mbar	< 4 mbar	< 0.2 % FS	< 0.2 % FS	< 0.2 % FS
Repeatability	[% FS typ.]	± 0.05	± 0.05	± 0.05	± 0.05	± 0.05
		Sensor 02 (P2/A2) NLH ± 0.25 %				
Pressure measuring range	[bar]	0.1 ... 0.5	0.5 ... 2	2 ... 100	100 ... 600	> 600
NLH @ +25°C (BSL through 0)	[% FS typ.]	± 0.25	± 0.25	± 0.25	± 0.25	± 0.25
TEB @ 0 ... +70°C	[% FS typ.]	± 1.0	± 0.7	± 0.7	± 0.7	± 0.7
TEB @ -25 ... +100°C	[% FS typ.]	± 2.0	± 1.0	± 1.0	± 1.0	± 1.0
Long term stability 1 year		< 4 mbar	< 4 mbar	< 0.2 % FS	< 0.2 % FS	< 0.2 % FS
Repeatability	[% FS typ.]	± 0.05	± 0.05	± 0.05	± 0.05	± 0.05


Dimensions




8854.XX.XX10.XX.XX.XX




8854.XX.XX15.XX.XX.XX




8854.XX.XX21.XX.XX.XX




8854.XX.XX31.XX.XX.XX




8854.XX.XX32.XX.XX.XX

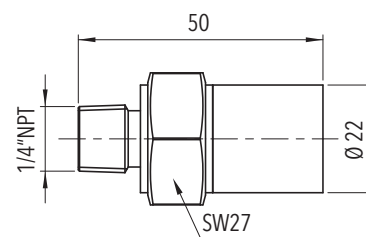

8854.XX.XX30.XX.XX.XX




8854.XX.XX39.XX.XX.XX

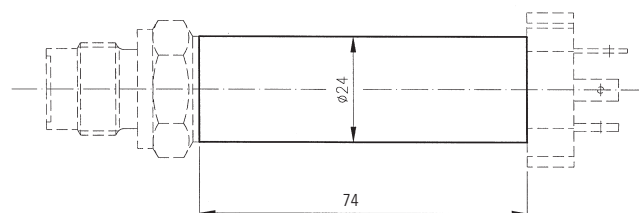


8854.XX.XXXX.XX.XX.T4

8854.XX.XXXX.XX.XX.T6

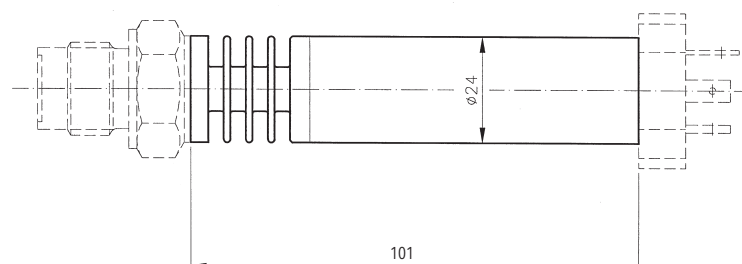


8854.XX.XXXX.XX.XX.T3


Dimensions

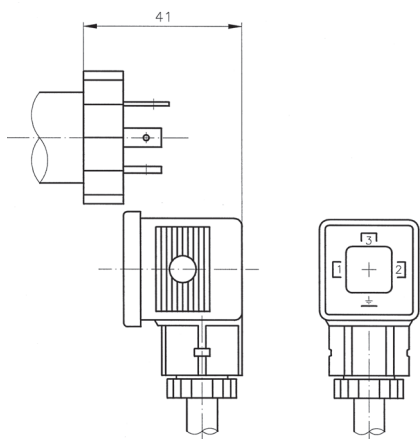


8854.XX.XXXX.05.XX.58

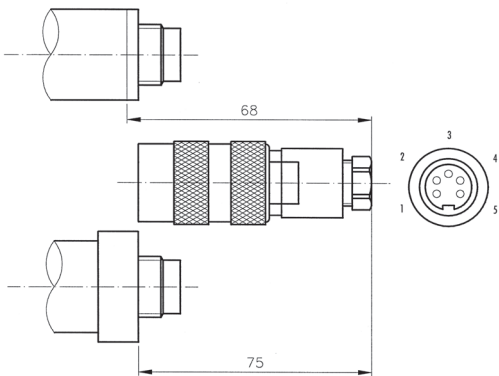


8854.XX.XXXX.14.XX.37

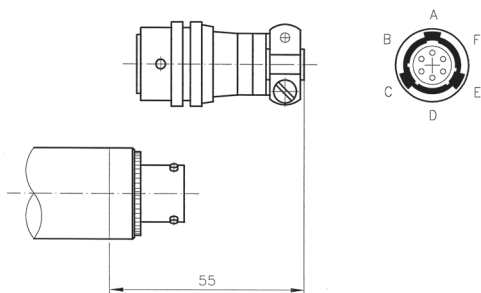

8854.XX.XXXX.02.XX.32








8854.XX.XXXX.22/39.XX.XX




8854.XX.XXXX.32.XX.XX

Electrical connection

Protection IP65					
Version	Industrial standard EN175301-803A	Binder 723	MIL-C 26482	Cable	M12x1 4-pole
Electrical connection	05 	14 	02 	22/39 	32 
4 ... 20 mA + V _{in} P _{out} ⊕ EP	1 2 3	3 1 5	A C F	white yellow grey	4 3 1
For Ex zones	1, 2 20, 21, 22	0, 1, 2 20, 21, 22	0, 1, 2 20, 21, 22	0*, 1, 2 20, 21, 22	1, 2 20, 21, 22

* **Attention!** Additional measure against static charges are required for Zone 0 to 20 for these cables (laid with earthed metal braid, metal hose or metal pipe).



U_o 28 V
I_o 93 mA
P_o 0.65 W

Marking	
For Ex zones	Marking
0, 1, 2, 20, 21, 22 M1, M2	 II 1G Ex ia IIC T3 ... T6 Ga II 1D Ex ia IIIC T145°C Da I M1 Ex ia I Ma
1, 2 20, 21, 22 M2	 II 2G Ex ia IIB T3 ... T6 Gb II 1D Ex ia IIIC T145°C Da I M2 Ex ia I Mb

Additional information		
Documents	Data sheet	www.trafag.com/H72334
	Instructions	www.trafag.com/H73227
	Flyer	www.trafag.com/H70679