




TSURUMI PUMP

KTD 3-phase
50Hz

Pump with agitator
- for professional use

A powerful slurry pump using KTZ pumps as a base. Features wear resistance and durability.



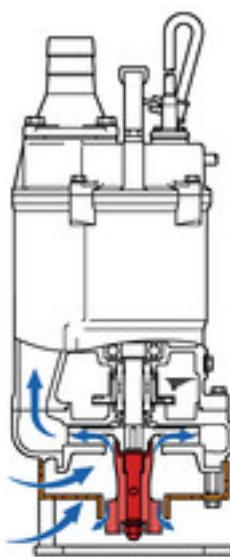


Forced agitation

The agitator installed on the motor shaft extension forcibly agitates the fluid for easy and efficient transmission of sludge and slurry.

Rugged

By offering a cast iron pump body, our durability is increased over standard aluminium body pumps.

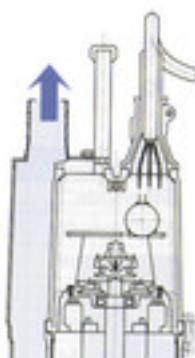


Efficient motor cooling

Slim line design with a top discharge offers economy of space. There is efficient motor cooling through a side flow channel.

Components:

001	Cable
006	Cable entrance
020	Pump casing
021	Impeller
022	Suction plate
023	Strainer
024	Agitator
025	Mechanical seal
026	Oil sealing
030	Oil lifter
032.	Outlet
035	Oil plug
036	Lubricant
050	Motor cover
052A	Upper bearing
052B	Lower bearing
053	Motor protector
054	Shaft
055	Rotor
056	Stator
060	Bearing housing
064	Motor casing
068	Handle

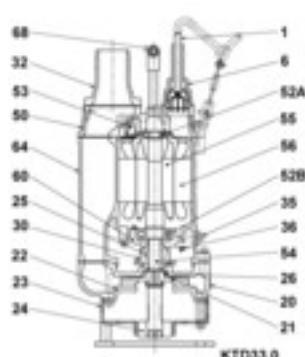


Specifications:

Model	Colour code curve	Bore mm	Motor output kW	Rated current A	Head max. m	Capacity max. l/min	Dry weight kg w/o cable	Max. solid handling ø mm	Pressure resistance max. m	Cable length m
KTD22.0	1	50	2,0	4,5	19,9	496	38,0	10	25	20
KTD33.0	2	80	3,0	6,5	22,0	794	65,0	10	25	20




ø Discharge bore mm		50,80
Pumping Fluid		Sludge, Slurry, Liquids containing sandy mud and/or bentonite
Temperature		0-40°C
Pump	Components	Impeller
		Double mechanical seal
		Shielded ball bearings
	Material	Impeller
		Chromium iron casting
		Grey iron casting EN-GJL-200
		Ductile iron casting EN-GJS-500-7
		Silicon carbide in oil bath
Motor	Lubrication	
	Type, Poles	
	Phase / Voltage	
	Insulation	
	Motor Protector (built-in)	
	Material	Casing
		Stainless steel EN-X30Cr13
		Cable
Discharge Connection		

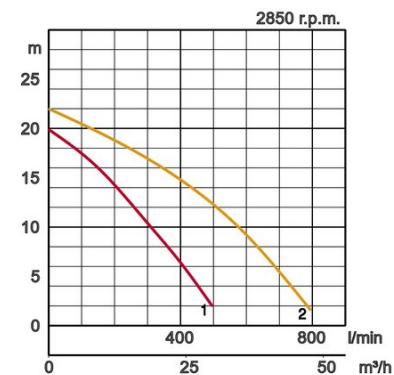

Dimensions in mm:

Model	A	A1	B	B1	D	H	W1
KTD22.0	235	173	550	442	221	519	140
KTD33.0	297	222	644	521	266	654	160

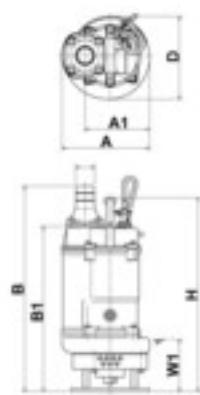

W1: lowest running water level

In the event of abrasive and corrosive utilization, stronger wear and tear will take place naturally in certain components. In this regard, please pay attention to our website www.tsurumi.eu/english/applications.htm.



Contributing to World-wide Prosperity and Understanding through Worker- and Environment-friendly Production.

Designed for increased productivity through fully integrated streamlined production systems, Tsurumi's factory in Kyoto (Japan) features a production capacity of a full 1 million pumps per year. Large-scale modern R&D facilities offer optimum conditions for experimenting and testing of even super-large pumps and for developing new products to expand the possibilities and applications of pumps. To provide optimum conditions for our main asset, our workers, as well as for the environment, special emphasis is placed on optimized working conditions with airconditioning, minimized dust and exhaust gas emission, comprehensive recycling and waste recovery.

Tsurumi (Europe) GmbH

Wahlerstr. 10
D-40472 Düsseldorf
Tel.: +49 (0)211-4179373
Fax: +49 (0)211-417937-480
Email: sales@tsurumi.eu
www.tsurumi.eu

We reserve the right to change specifications and designs herein for improvement without prior notice. Our pumps are for professional use only. In the event that Tsurumi (Europe) GmbH have, in exceptional cases taken over, a manufacturer's warranty, this entitles the enduser to assert remedy free of charge against Tsurumi (Europe) GmbH due to any defect to the product occurring during the guarantee period (see below), also then when the warranty claims against the seller do not or no longer exist. In the event of malfunction, which is attributable to the improper handling by the enduser, no guarantee claim shall arise. Further claims shall not result from the warranty, unless if something to the contrary has explicitly been determined. The decision as to whether remedy is effected by way of replacement or repair shall be at the choice of Tsurumi (Europe) GmbH. The claims shall be time barred after a period of three months after expiry of the guarantee period, however, not before expiry of the warranty period which is valid towards the seller. In the event of doubt, the warranty period shall correspond with the warranty period which is valid between the end-user and his seller.



con-KTD-EN