

# Temperature relay TR660IP

Sensors 6 x Pt 100, Pt 1000 or PTC, 7 limits, analog outputs or interface RS485, IP interface, operation with browser via TCP/IP

## TR660IP



### Part numbers:

TR660IP analog **T224370**

4 analog outputs programmable  
2x 0/4 - 20 mA and 2x 0/2 - 10 V

TR660IP RS485 **T224371**


interface RS485 (modbus RTU)

Temperature Relays TR660IP monitor up to 6 sensors for up to 7 limits. Different sensors can be connected at the same time, e.g. Pt 100 (RTD) and PTC-thermistors. Typical applications are monitoring of motors, generators or transformers. An other application is the use as a 2- or more step-controller with additional monitoring of over- or undertemperature or monitoring of differences in temperatures of 2 sensors.

Preset programs allow easy setting e.g. monitoring of transformers with/without monitoring of temperature of core or with/without controlling a ventilator.

Operation can be made at the device or with a standard browser via ethernet.

- 6 inputs for sensors Pt 100, Pt 1000 and PTC, mixed sensors possible
- 7 alarms / output relays
- alarm 2 of x = alarm only when limit is exceeded in min. 2 sensors
- monitoring of difference of temperatures
- monitoring of rate of change of temperature
- logging of temperatures and history
- preset programs for protection of motors, transformers and more
- interface ethernet TCP/IP, values available via modbus TCP
- programming with browser via TCP/IP or with joystick at device
- coloured LCD display for clear display of temperatures and states of alarms
- universal power supply AC/DC 24-270 V

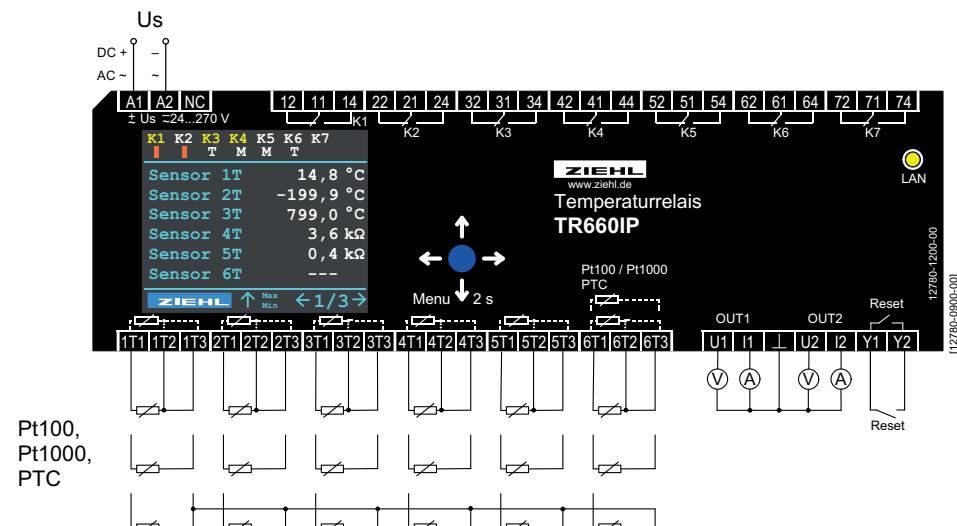

## Technical data

Rated supply voltage Us

AC/DC 24 - 270 V, 0/50/60 Hz

Sensor connection

6 x Pt 100, Pt 1000, PTC

Type of connection

3-wire, 2-wire (line resistance 0,0...99,9 Ohm)

Monitoring range

-199,9...+800 °C

Switching delay on/off

00:00...59:59 mm:ss

Relay output

7 x changeover contact

Test conditions

EN 61010, EN 61326

Rated ambient temperature range

-20°C...+65°C

Housing

Design V8

Dimensions (w x h x d)

140 x 90 x 58 mm, mounting height 55 mm

Protection housing/terminals

IP 30 / IP 20

Mounting

snap mount on 35 mm DIN rail or screws M4

Weight

app. 400 g