



SK-120

BALL VALVE(FOR WATER AND AIR)

GENERAL FEATURES

Designed for water and air installations.

Application:

Can be used in water and air lines.

Installation:


Can be install every position.

TECHNICAL SPECIFICATION

Workin Pressure	: PN25
Working Temp.	: 80 °C
Gasket	: NBR
Body:	: CuZn40Pb2
Valve Standard	: TS EN 13547
Screw Norm	: EN ISO 228-1



Working Conditions	
Max. Working Pressure (bar)	25
Max. Working Temperature(°C)	80

3D APPLICATION SAMPLE

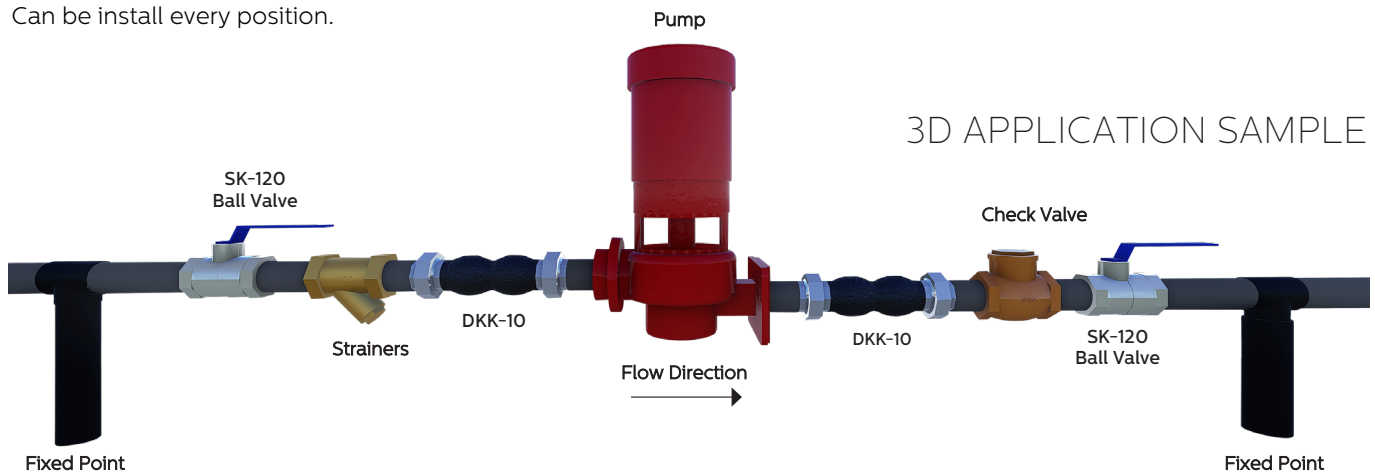

SK-120 BALL VALVE(FOR WATER AND AIR)

MATERIAL LIST		
NO	Part Name	Material
1	Body	CuZn40Pb2
2	Ball Teflon	PTFE
3	Ball	CuZn39Pb3
4	Cover	CuZn40Pb2
5	Stem	CuZn39Pb3
6	Nut	1.0503
7	O-Ring	NBR
8	Handle	6222 (STW 22)

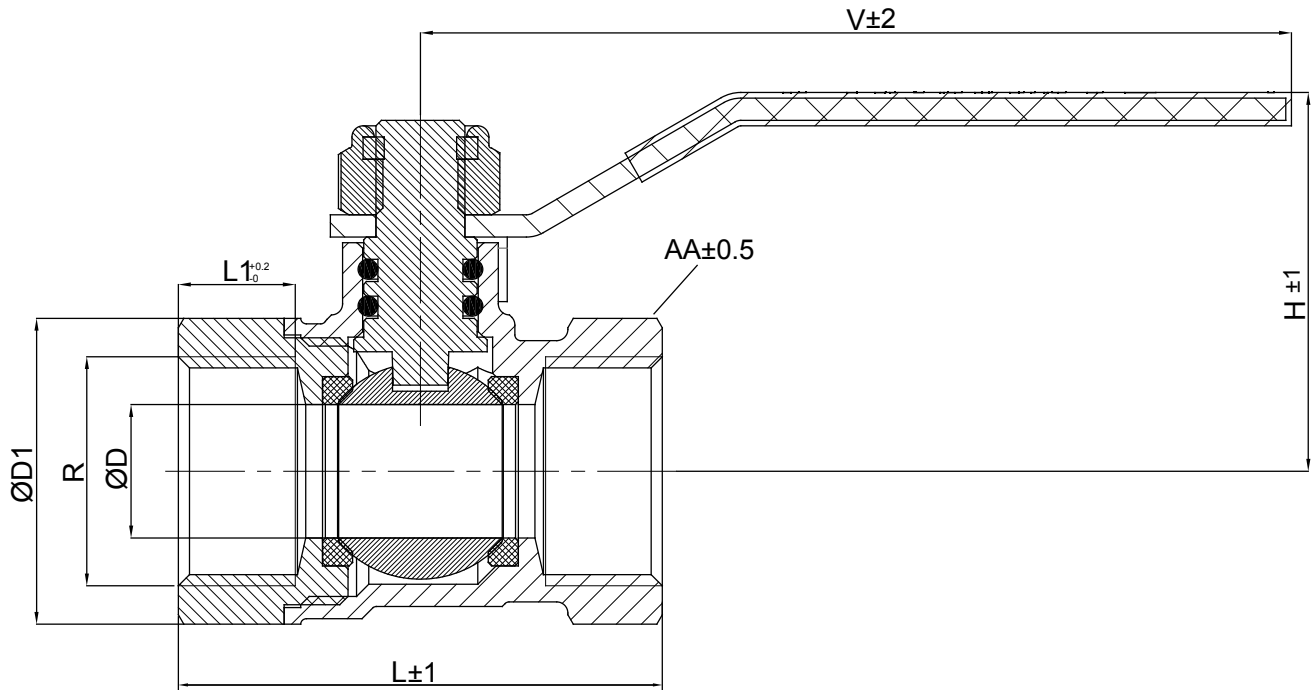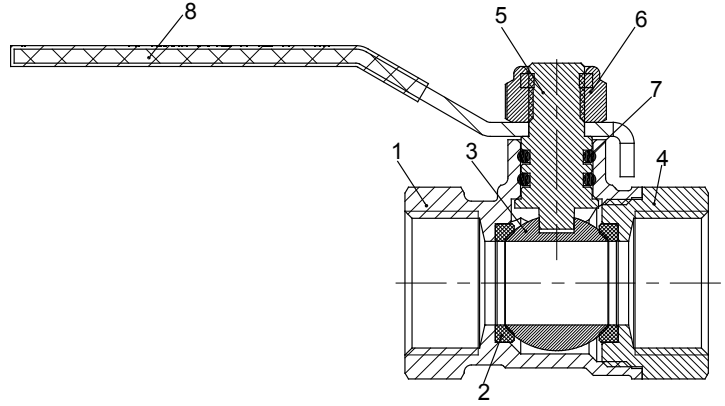

DIMENSIONS (mm)								
DN	ØD	ØD1	L±1	L1	H	V±2	kg	AA
15	12	27,5	43,5	10,7	35,5	95	0,14	26
20	17	33,5	53	12,2	38,5	95	0,22	32
25	24	41,5	65	13,7	48,6	112,5	0,4	39
32	30	52	77	15,7	53	112,5	0,64	49
40	37	58,5	84,5	15,7	62	121,5	0,89	55
50	49	72	106	19,2	71	145,5	1,39	68



HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27
info@ayvaz.com | www.ayvaz.com

Cona
Caserta/Italy
Tel: +39 0823 187 3988
rmolaro@ayvaz.com

Ayvaz Russia
Moscow/Russia
Tel: +74959951728
ayvazrus@ayvaz.com

Ayvaz Germany
Viernheim/Germany
Tel: +49 62046014399
germany@ayvaz.com

Ayvaz Ukraine
Kiev/Ukraine
Tel: +380 44 390 57 57
info@ayvaz.com.ua

Tricorr
Warsaw/Poland
Tel: +48-32-783-295-1
tricorr@tricorr.eu

Ayvaz Bakü
Bakü/Azerbaijan
Tel: +99(455) 579-84-32
ahayatov@ayvaz.com

Hacı Ayvaz M.E.
Dubai/U.A.E
Tel: +971 563550822
+971 501306871
mideast@ayvaz.com

Ayvaz China
Cixi City/China
Tel: +86 0574 5897 3851
info@ayvazchina.com

Ayvaz Kazakhstan LLP
Almaty/Kazakhstan
Tel: +7 (727) 327 97 57
info_kz@ayvaz.com
www.ayvaz.kz

Ayvaz N
Isperih/Bulgaria
Tel: +359 8431 27 32
office@ayvaz-n.eu

Ayvaz Serbia
Belgrad/Serbia
Tel: +381 61 658 70 52
yakbiyik@ayvaz.com

Ayvaz Vietnam
HCMC/Vietnam
ggursoy@ayvaz.com