


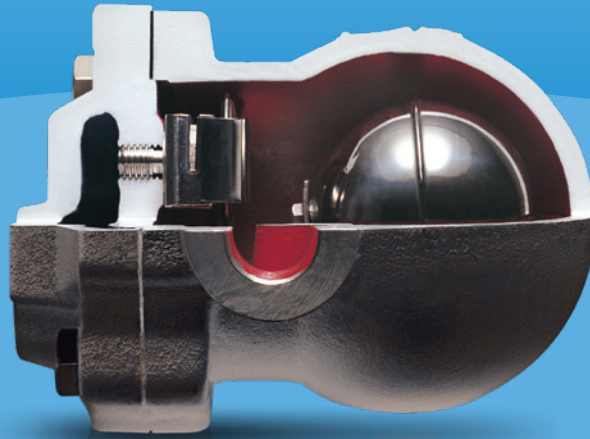

SK-51

FLOAT TYPE STEAM TRAP


GENERAL FEATURES

Ayvaz SK-51 float steam traps especially perform continual evacuation at the steam saturation temperature. Ayvaz SK-51 doesn't affect instantaneous and large pressure shift. SK-51 is mainly applied at the systems where the condensate is evacuated rapidly and it is also ideal for automatic temperature control system.

Installation:

SK-51 can be used vertically as the inlet to stay up the top and the outlet to remain at the bottom. It can also be installed horizontally from right to the left or opposite way. If it is not indicated differently in the order sheet, it will be assumed as right to the left. Will be assumed as right to the left. Cover part can be arranged according to horizontal or vertical installation type.

(1/2" - 3/4" - 1")

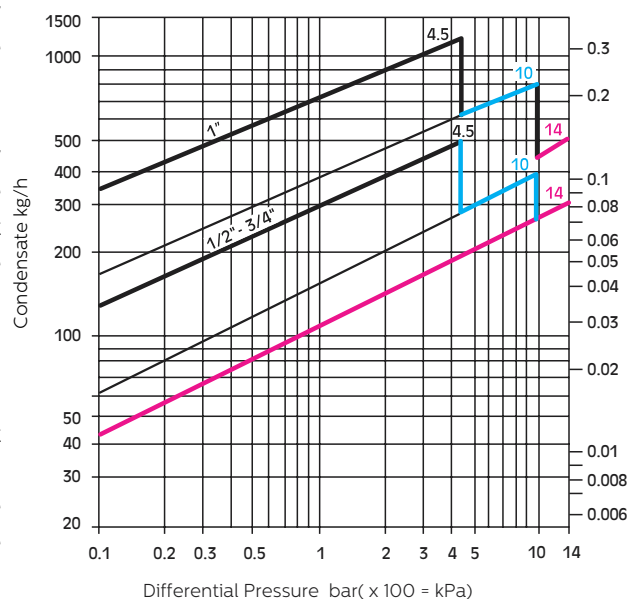

Discharge Chart:

Red Chart : $\Delta p = 14$ bar
Blue Chart : $\Delta p = 10$ bar
Black Chart : $\Delta p = 4.5$ bar

Product Features:

Body: Ductile Iron GGG 40
Cover: Ductile Iron GGG 40
Internals and Float: Stainless Steel
Connection: Flanged and Threaded


OPERATING CONDITIONS	
Max. Operating Pressure	16 bar
Max. Differential Pressure (ΔP)	4.5-10-14 bar
Max. Operating Temperature	250 °C







* Please ask to our sales team for different pressures and diameters.

SK-51 FLOAT TYPE STEAM TRAP

CONSTRUCTION

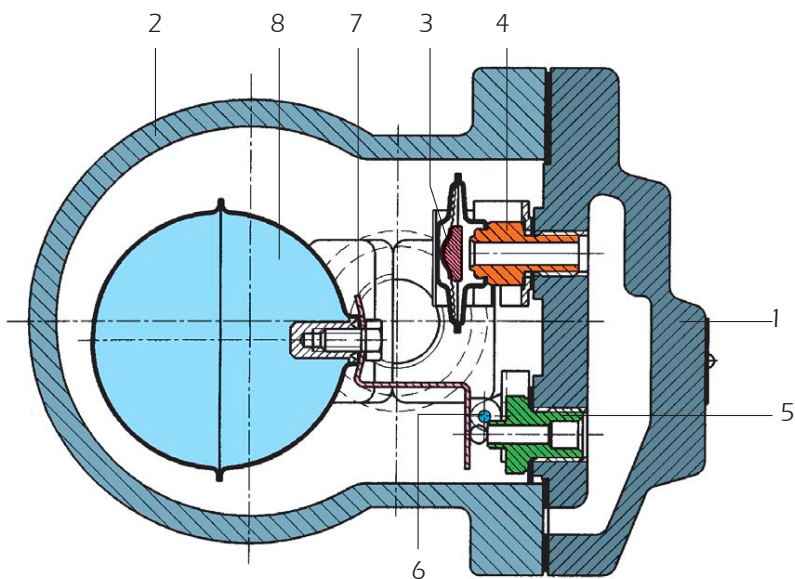

PART LIST		
NO	PART NAME	MATERIAL
1	Cover	Ductile Iron GGG 40
2	Body	Ductile Iron GGG 40
3	Thermostatic Capsule	Stainless Steel
4	Air Drain Unit	Stainless Steel
5	Condensate Drainer	Stainless Steel
6	Orifice	Stainless Steel
7	Float Lever	Stainless Steel
8	Float	Stainless Steel

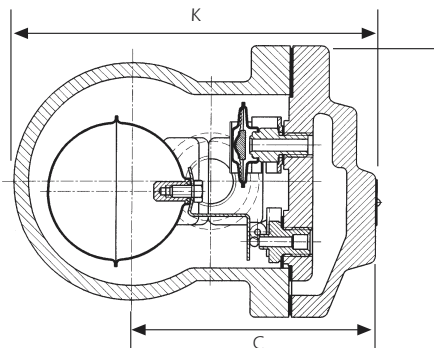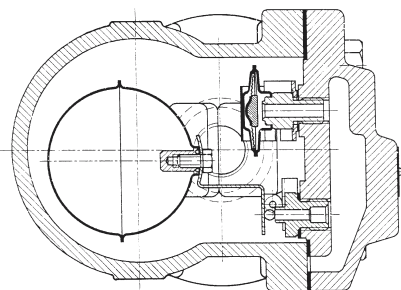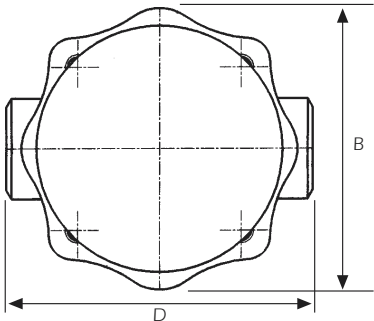


DIMENSIONS						
SIZE	ARTICLE NO	FLANGED				
		A (mm)	K (mm)	B (mm)	C(mm)	D (mm)
DN 15	703200102000	150	150	108	68	122
DN 20	703200102003	150	150	108	68	122
DN 25	703200102010	160	167	108	107	145

SK-51 FLOAT TYPE STEAM TRAP

INSTALLATION

3D INSTALLATION SAMPLE

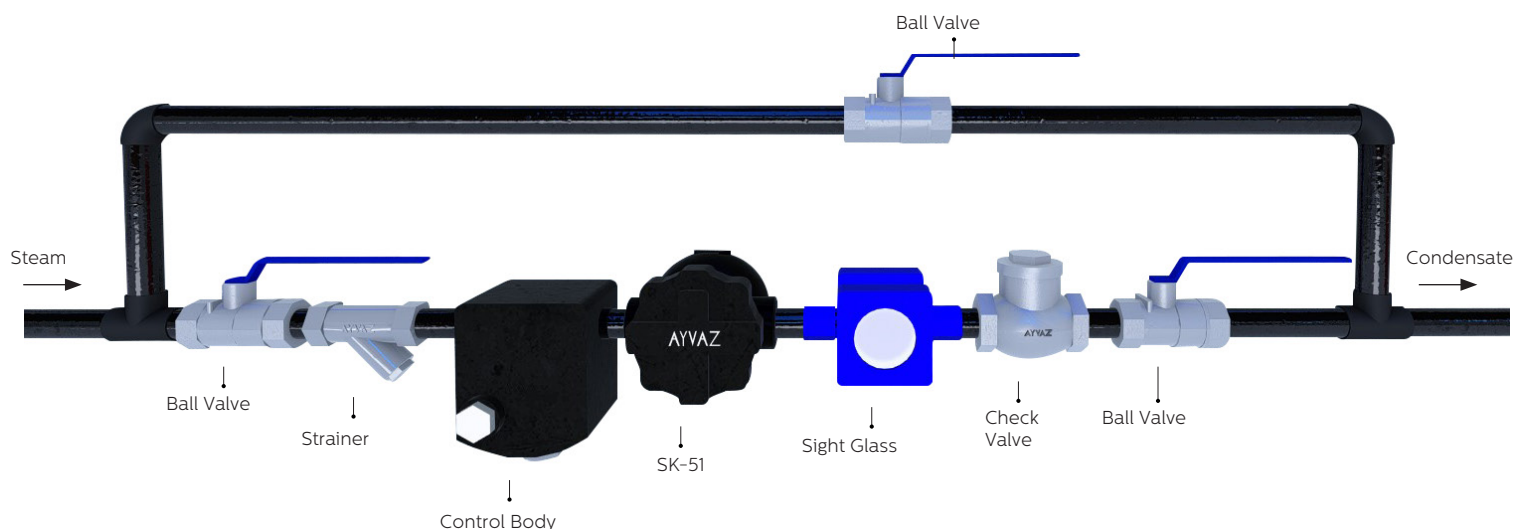

2020 - Non contractual document - Reproduction forbidden without prior authorization



HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27
info@ayvaz.com | www.ayvaz.com

Caserta/Italy

Tel: +39 0823 187 3988
rmolaro@ayvaz.com

Moscow/Russia

Tel: +74959951728
ayvazrus@ayvaz.com

Viertheim/Germany

Tel: +49 62046014399
germany@ayvaz.com

Kiev/Ukraine

Tel: +380 44 390 57 57
info@ayvaz.com.ua

Warsaw/Poland

Tel: +48-32-783-295-1
tricorr@tricorr.eu

Dubai/U.A.E

Tel: +971 563550822
+971 501306871
mideast@ayvaz.com

Ayvaz China Jinan/China

Tel: +86 0574 5897 3851
info@ayvazchina.com

Kazakhstan

Tel: +7 (701) 066 066 1
+90 (533) 760 34 66
celyas@ayvaz.com

Isperih/Bulgaria

Tel: +359 8431 27 32
office@ayvaz-n.eu

Belgrad/Serbia

Tel: +381 61 658 70 52
yakbiyik@ayvaz.com