



Company name:


Created by:

Phone:

Date:

16/01/2026

Description	Value
<b>General information:</b>	
Product name:	DMX 224-5 B-SS/V/SS-X-E1A1A1XEMAG
Product No:	On request
EAN number:	On request
<b>Technical:</b>	
Nominal flow rate at 50 Hz:	224 l/h
Number of dosing heads:	1
Approvals:	CE,EAC,CNROHSEX
Non return valve type, inlet pump 1:	Standard
Non return valve type, outlet pump 1:	Standard
Max viscosity:	150 mPas
<b>Materials:</b>	
Pump housing:	Aluminium
Dosing head, pump 1:	Stainless steel EN 1.4571
Valve ball:	Stainless steel
Valve ball:	EN 1.4401
Valve seat:	Stainless steel
Valve seat:	EN 1.4571
Valve gasket:	FKM
Valve gasket:	Rubber
<b>Installation:</b>	
Max operating pressure at 50 Hz:	5 bar
Maximum permissible inlet pressure:	0 bar
Type of inlet connection:	Rp
Type of outlet connection:	Rp
Size of inlet connection:	3/4 inch
Size of outlet connection:	3/4 inch
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 70 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
<b>Electrical data:</b>	
Power input P1:	0.2 kW
Mains frequency:	50 Hz
Max. frequency:	50 Hz
Rated voltage:	3 x 230/400 V
Enclosure class (IEC 34-5):	IP65
Cable included (Yes/No):	N
Power plug:	No plug
<b>Controls:</b>	
Type of connector:	No plug
Type of control variant:	Standard
Frequency converter:	Not prepared for VFD
<b>Others:</b>	
Net weight:	21 kg
Gross weight:	32.3 kg
Shipping volume:	0.156 m³
Diaphragm Leakage Detection:	N

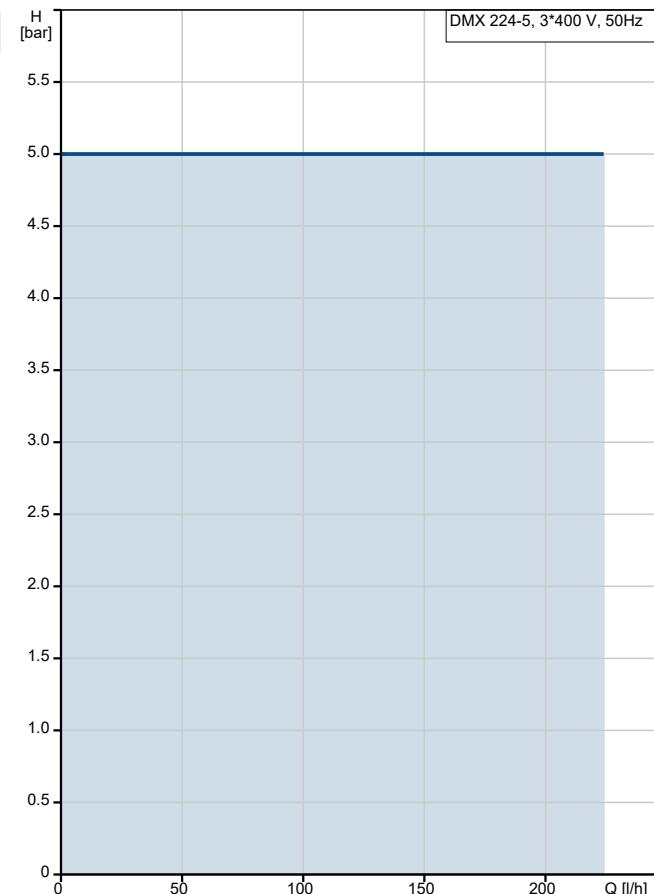

Pumped liquid = Water  
Liquid temperature during operation = 20 °C  
Density = 998.2 kg/m³



Company name:

Created by:

Phone:

Date:

16/01/2026

**Order Data:**

Position	Your pos.	Product name	Amount	Product No	Total
		DMX 224-5 B-SS/V/SS-X-E1A1A1XEMAG	1	On request	