

SR0100




Control monitor for flow sensors

VS0200/ 24VDC

Article no longer available - archive entry

replaced by: SR0150

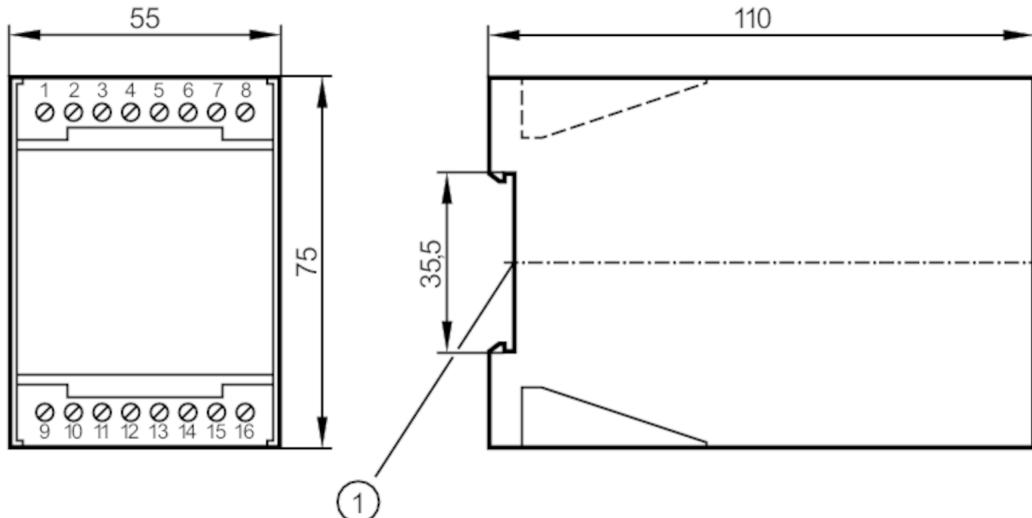

1 mounting on DIN rail



Application

Application	Flow monitoring
-------------	-----------------

Electrical data

Operating voltage tolerance	[%]	-10...10
Operating voltage	[V]	24 DC
Current consumption	[mA]	60
Power-on delay time	[s]	30
Number of channels		1

Outputs

Electrical design	relay
Contact rating	4 A, 250 V AC
Switching function flow monitoring	relay energised when flow is present

Software / programming

Adjustment of the switch point	potentiometer
Selection liquids / gases	slide switch

Operating conditions

Ambient temperature	[°C]	0...60
Protection		IP 40
Protection rating terminals		IP 20

SR0100



Control monitor for flow sensors

VS0200/ 24VDC

Mechanical data

Housing	housing for DIN rail mounting	
Dimensions [mm]	75 x 55 x 110	
Materials	plastics	

Displays / operating elements

Display	function	11 x LED
---------	----------	----------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

terminals: 16 x ...2.5 mm²

Connection

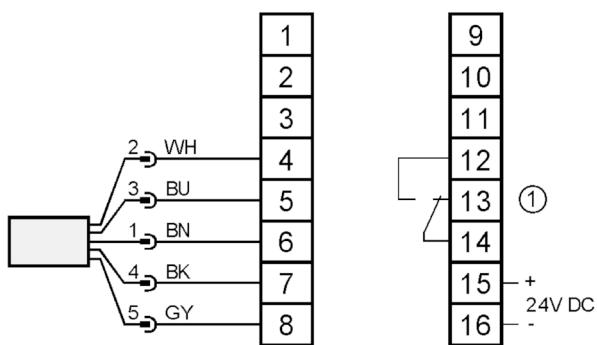

1: Relais Flow monitoring

Core colours :

BN = brown

BU = blue

BK = black

WH = white

GY = grey

Article no longer available - archive entry

replaced by: SR0150